

Document Control

S/N	Version	Date	Author	Summary
01	1.0	Jul 2026	Asset Management	Initial Issue — Group Tenant Fitting Out Manual Covers the following: Parts 1–2: Tenant journey and Service Charter Part 3: Design excellence and workplace standards Part 4: Sustainability and embodied carbon Part 5, Appendix AA: Green Lease and data governance Part 6: Design submissions Part 7: Technical, smart-building and energy-flexibility requirements Part 8: Construction management and contractor classifications (including Appendix AC via the Asset Performance Platform Standard) Part 9: Testing and commissioning Part 10: Handover, including digital handover and operational readiness Part 11: Operational requirements, dashboards, Design & Sustainability Awards Programme, and climate resilience Part 12: Reinstatement requirements Part 13: Retail and F&B requirements Part 15: Flexible workspace and fitted suites Appendices: A–Q, T–Z and AA Issued in conjunction with the Asset Performance Platform Standard v1.0, with shared Part numbering and Appendix references across both documents.

Key Contacts

The Building Management Office is your primary contact for all operational, fit-out and sustainability matters.

Function	Company / Team	Telephone	Email / Portal
Building Management Office	[Building Manager — see Building Addendum]	[Contact — see Addendum]	[Email — see Addendum]
Asset Management	Asset Management	[See Building Addendum]	[See Building Addendum]
Sustainability / Green Lease	Sustainability Team	[See Building Addendum]	sustainability@.com.sg
Tenant Portal	[Tenant Portal — see Building Addendum]	—	[URL — see Building Addendum]

Function	Company / Team	Telephone	Email / Portal
Building LEW (Compulsory)	[See Building Addendum — Appendix A]	[See Addendum]	[See Addendum]
Fire Protection (Compulsory)	[See Building Addendum — Appendix A]	[See Addendum]	[See Addendum]
ACMV / BMS	[See Building Addendum — Appendix A]	[See Addendum]	[See Addendum]
Electrical / ELV	[See Building Addendum — Appendix A]	[See Addendum]	[See Addendum]
Plumbing & Gas	[See Building Addendum — Appendix A]	[See Addendum]	[See Addendum]
24-Hour Emergency	[Building Management — see Addendum]	[See Addendum]	—

How to Use This Manual

This Manual is organised in 13 Parts. Each Part is colour-coded and can be read independently. Use the matrix below to navigate to the section most relevant to your role.

Part / Section	Purpose	Who Should Read It
Parts 1–2 Welcome & Journey	Group standard, building facts, governance, definitions and the end-to-end fit-out journey from handover to reinstatement.	Tenant representatives, leasing teams, project managers and all new fit-out teams.
Part 3 Design Excellence	Grade A design quality standards, material palette, biophilic design, wellness and branding principles.	Architects, interior designers, workplace strategists and fit-out PMs.
Parts 4–5 Sustainability & Green Lease	Net Zero Fit-Out Standard, Scope 1/2/3 carbon, GMI pathway, energy, materials, IEQ, smart building and Green Lease Sustainability Requirements in Parts 4, 5 and 11.	Sustainability consultants, designers, QPs, ESG managers and tenant leadership.
Part 6 Design Submissions	Submission gates, drawing matrix, responsibilities and approval principles.	Designers, QPs, PEs, LEWs, FSEs and tenant PMs.
Parts 7–9 Technical, Construction, T&C	Discipline-specific technical standards, site rules, EHS, PTW, testing and commissioning requirements.	QPs, contractors, site supervisors, safety officers and M&E engineers.
Parts 10–12 Handover, Operations, Reinstatement	Practical completion, digital handover, Green Completion Pack, operational obligations and end-of-lease requirements.	Tenant facilities teams, project managers and asset management.

Tenant Quick-Start

Plain-English summary for your project lead. The rest of this Manual is the detail — this page is the short version.

Your fit-out in ten steps

Welcome. Fitting out your space at a building is straightforward if you start early and keep us in the loop. If you do these ten things, everything else falls into place.

- 1. Register on the Tenant Portal** — The day you receive your Notice of Possession. It is how you submit everything and see your energy data.
- 2. Come to the kick-off meeting (within 5 days)** — We hand over your Building Addendum, the briefing pack and forms. Bring your contractor and designer.
- 3. Appoint your team early** — Your designer, and the Qualified Persons / LEW / Fire Safety Engineer you'll need. Some of our contractors are compulsory — see the Building Addendum.
- 4. Design green from day one** — Every fit-out targets Green Mark for Interiors (GMI) Gold. Efficient lighting, low-VOC materials and sub-metering are far cheaper designed in than retrofitted.
- 5. Submit your concept, then detailed drawings** — Concept within 21 days; full drawings at least 21 working days before you want to start on site.
- 6. Get your approvals** — Our review is not an authority approval — you still need BCA, SCDF, PUB and NEA sign-offs where they apply.
- 7. Get your Permit to Work (PTW)** — No work starts without it. The checklist is in Part 8. Include Green Form G1 and name your Sustainability Liaison Officer (Form G2).

8. **Build within the rules** — Approved hours only, protect the common areas, keep it clean daily, and follow the EHS rules. Penalties in Part 8 are avoidable.
9. **Test, commission, and hand over green** — Balance the air, test fire and PA, commission your meters, and submit the Green Completion Pack. It's a condition of getting your deposit back.
10. **Operate as our sustainability partner** — Share your energy, water and waste data, keep your SLO current, and join the annual Green Lease review. We share our data with you too.

The five things people most often get wrong

- **Starting work before the PTW is approved.** This forfeits your deposit and can bar your contractor.
- **Leaving sustainability to the end.** GMI, sub-metering and IAQ testing must be designed in, not bolted on.
- **Blocking sprinklers, return-air grilles or fire access.** Keep 600 mm clear below sprinkler heads and never seal a return-air grille.
- **Forgetting the Building Addendum.** Contacts, rates, contractors and the Green Mark rating are all specific to your building — read it first.
- **Missing the deposit-refund documents.** As-builts, O&M manuals, the Green Completion Pack and authority approvals all gate your refund.

WHO TO CALL: Your first point of contact for everything — operational, technical or sustainability — is the Building Management Office listed in your Building Addendum. When in doubt, ask them first.

At a Glance - Critical Requirements

Stage	Non-Negotiable Requirements
Before design submission	Attend design/fitting-out briefing. Appoint project team, QP/PE/LEW/FSE. Obtain latest Manual and base building information. Identify sustainability and GMI requirements.
Before PTW commencement	Landlord acceptance of drawings. Statutory approvals where applicable. Fitting-out deposit and insurance. Risk assessment and method statements. Contractor registration. Hoarding and protection plan. Green Fit-Out Acknowledgement. SLO designation timeline.
During works	Work only within approved hours and within the Premises. Maintain hoarding and common-area protection. Prevent dust, odour, noise, fire alarm activation and service disruption. Remove waste daily. Comply with EHS Rules for Vendors.
Before occupation	Joint inspection. Authority approvals. As-built drawings. Air balancing. PA/fire testing. Meter commissioning. Green Completion Pack. Waste report. Materials register. IAQ evidence where required.
During lease	Operate within approved design baseline. Maintain energy, water, IAQ and fire systems. Share ESG data. Participate in Green Lease reviews, audits, POE surveys and improvement actions. Maintain current SLO contact.

Hierarchy of Requirements

Where there is a conflict between the instruments below, the higher order prevails. The Tenant remains responsible for compliance with all applicable laws and authority requirements regardless of the Manual.

Order	Instrument / Requirement	Application
1	Applicable law, statutory approvals and Authority requirements	Tenant and consultants remain solely responsible for compliance with all prevailing Singapore laws, codes, regulations and Authority conditions at all times.

Order	Instrument / Requirement	Application
2	Lease Agreement / Licence / Letter of Offer	Prevails over this Manual where there is a conflict, unless the Landlord confirms otherwise in writing.
3	Landlord approvals, design guidelines and written instructions	Specific requirements issued by the Landlord, Asset Management or Building Management for the Premises or works.
4	This Manual and controlled appendices	Minimum requirements for fit-out, operation, alteration and reinstatement.
5	Approved drawings, PTW, method statements and Green Completion Pack	Project-specific approved documents that the Tenant must follow and maintain.

RACI — Roles and Accountability

R = Responsible A = Accountable, C = Consulted, I = Informed. Landlord review, comment or endorsement does not relieve the Tenant or its consultants from statutory responsibility.

Activity	Tenant	Tenant QP / LEW / FSE	Main Contractor	Landlord / BM
Design concept and workplace brief	A/R	C	I	C
Statutory compliance and submissions	A	R	C	I
Landlord design review	C	R	I	A
PTW application and site mobilisation	A	C	R	I
Construction safety and EHS	A	C	R	I
Base building system tie-ins	A	R	C	C
Testing and commissioning	A	R	R	I
Green Completion Pack	A/R	C	C	I
Operational ESG data sharing	A/R	C	I	C
Reinstatement and waste diversion	A/R	C	R	I

Table of Contents

Document Control	2
Key Contacts	2
How to Use This Manual.....	4
Tenant Quick-Start.....	4
Your fit-out in ten steps	4
The five things people most often get wrong	5
At a Glance - Critical Requirements.....	5
Hierarchy of Requirements	5
RACI — Roles and Accountability	6
COMPANION DOCUMENTS	11
PART 1A - WELCOME TO THE BUILDING.....	11
1A.1 Welcome from Asset Management	12
1A.2 Future Value 2030 — Our Sustainability Blueprint.....	12
1A.3 Building Vision & Green Mark.....	12
1A.4 Building Facts	13
1A.5 Digital Portal & QR Code Access	13
PART 1B – DEFINITIONS & INTEPRETATIONS	14
1B.1 Definitions	14
1B.2 Rules of Interpretation	14
PART 2 – THE TENANT JOURNEY	16
2.1 Overview	Error! Bookmark not defined.
2.2 The 13- Stage Fit-Out Journey	16
2.2 Timeline Overview.....	17
2.3 STAGE 0 — FRONT-END FEASIBILITY REVIEW	17
2.4 FIT-OUT CONCIERGE	18
PART 3: DESIGN EXCELLENCE	20
3.1 Design Vision	20
3.2 Architectural Intent	20
3.2.1 Reception & Entry Sequence	20
3.2.2 Office Frontage & Shopfront.....	20
3.2.3 Lighting Quality.....	21
3.3 Material Palette & Sustainability Credentials	21
Restricted Materials	21
3.4 Biophilic Design.....	21
3.5 Wellness & Universal Design.....	22
3.5.1 Wellness Infrastructure.....	22
3.5.2 Universal Design (UD).....	22
3.6 Branding Principles	22

3.7 DESIGN REVIEW PANEL (DRP)	22
3.8 DESIGN SUBMISSION SCORECARD.....	23
3.9 WORKPLACE PLANNING BENCHMARKS	24
PART 4 – SUSTAINABILITY FRAMEWORK	25
4.1.1 Net Zero Fit-Out Standard	25
4.1.2 Sustainable Fit-Out Framework — Nine Pillars	25
4.2 ENERGY	26
4.2.1 Lighting Power Budget — SS 530:2024.....	26
4.2.2 Lighting Controls (Mandatory for all fit-outs)	26
4.2.3 Energy, Utility and ESG Data Reporting	26
4.2.4 ACMV Design — Energy Performance	26
4.3 CARBON — SCOPE 1, 2 AND 3.....	27
4.3.1 SCOPE 1 — DIRECT EMISSIONS (REFRIGERANTS + COMBUSTION)	27
4.3.2 SCOPE 2 — INDIRECT EMISSIONS (ELECTRICITY)	27
4.3.3 SCOPE 3 — VALUE CHAIN EMISSIONS (EMBODIED CARBON + WASTE).....	27
4.4 GREEN MARK FOR INTERIORS (GMI) CERTIFICATION.....	27
4.5 MATERIALS & CIRCULAR ECONOMY	28
4.5.1 SUSTAINABLE MATERIALS PRIORITY	28
4.5.2 MATERIAL SELECTION REQUIREMENTS.....	28
Walls and Ceilings	28
4.5.3 DESIGN FOR DISASSEMBLY.....	29
4.5.4 CONSTRUCTION WASTE.....	29
4.5.5 ACOUSTIC DESIGN	29
4.5.6 INDOOR PLANTS AND BIOPHILIC FEATURES	29
4.5.7 FLEXIBLE LAYOUT	29
4.6 WATER EFFICIENCY	29
4.6.1 GENERAL REQUIREMENTS	29
4.6.2 KITCHEN AND PANTRY	29
4.6.3 PRIVATE WATER SUB-METERING	30
4.6.3 APPLIANCES AND EQUIPMENT.....	30
4.7 INDOOR ENVIRONMENTAL QUALITY (IEQ)	30
4.7.1 VOC AND MATERIALS.....	30
4.7.2 HEALTH & WELLNESS PATHWAY	30
4.7.3 IAQ TESTING.....	31
4.7.4 ACOUSTIC COMFORT.....	31
4.7.5 THERMAL COMFORT	31
4.8 SMART BUILDING & BMS INTEGRATION	31
4.9 Sustainability Liaison Officer (SLO)	31
4.10 EMBODIED CARBON REQUIREMENTS	32
PART 5 – GREEN LEASE SUSTAINABILITY REQUIREMENTS	33

5.1 A Partnership for Sustainability	33
5.2 Commitments	33
5.3 Tenants Commitment.....	34
5.4 Sustainability Data Exchange Protocol	34
5.5 Annual Green Lease Performance Review	35
5.6 DATA GOVERNANCE & TENANT DATA RIGHTS.....	35
5.7 GREEN LEASE SUSTAINABILITY REQUIREMENTS	36
5.7.2 SHARED SUSTAINABILITY COMMITMENT	37
5.7.3 CERTIFICATION & SMART-BUILDING COMMITMENTS	37
5.7.4 BUILDING MANAGEMENT AND TENANT DESIGN SUPPORT	37
5.7.5 WASTE MANAGEMENT, RECYCLING AND 3R PROGRAMME	37
5.7.6 WATER EFFICIENCY AND METERING	37
5.7.7 MONITORING, REPORTING AND DATA SHARING.....	37
5.7.8 TENANT ENGAGEMENT, EDUCATION AND POE.....	38
5.7.9 REDUCING CAR DEPENDENCY.....	38
5.7.10 TENANT CERTIFICATION AND COMPLIANCE OBLIGATION.....	38
5.7.11 LIGHTING POWER, ILLUMINANCE AND CONTROLS.....	38
5.7.12 ACMV AND CONTROL SYSTEMS	38
5.7.13 MATERIALS, FIT-OUT AND EQUIPMENT.....	38
5.7.14 CLEANING, WASTE AND INDOOR CONTAMINANTS MANAGEMENT	38
PART 6 – DESIGN SUBMISSION REQUIREMENTS	39
6.1 SUBMISSION PROCESS OVERVIEW	39
SUBMISSION TIMELINE	39
6.2 DRAWING SUBMISSION MATRIX	39
6.3 RESPONSIBILITIES	41
6.3.1 RESPONSIBILITIES OF THE TENANT.....	41
6.3.2 RESPONSIBILITIES OF THE TENANT'S DESIGNER.....	41
6.3.3 RESPONSIBILITIES OF THE LANDLORD	41
6.4 GENERAL REQUIREMENTS.....	42
6.5 SPECIALIST WARRANTIES	42
The Tenant shall not undertake any work that may invalidate, reduce, prejudice or otherwise affect any warranty applicable to the Building or its systems.	42
Where specialist involvement is required to preserve an existing warranty, the Tenant shall engage the Landlord's nominated specialist contractor or such alternative contractor approved by the Landlord.	42
All associated costs shall be borne by the Tenant.....	42
6.6 CSC AND STATUTORY CLEARANCES.....	42
6.6A CSC GOVERNANCE AND LANDLORD'S QUALIFIED PERSONS	43
6.6B LANDLORD REVIEW AND NO-OBJECTION PROCESS	43
6.6C NOMINATED BASE CONTRACTOR POLICY	44
6.6D PROTECTION OF GREEN MARK, DIGITAL AND ESG PERFORMANCE	44

6.6E CONSULTANT VETTING FEES 44

PART 7 – TECHNICAL STANDARDS 45

7.1 INTRODUCTION..... 45

7.2 ELECTRICAL 45

7.3 ACMV (AIR-CONDITIONING & MECHANICAL VENTILATION) 47

7.4 FIRE PROTECTION 49

COMPANION DOCUMENTS

This Manual is issued alongside the **Asset Performance Platform Standard**. The Manual sets out tenant-facing requirements, while the Platform Standard outlines 's approach to asset performance, capital planning, resilience, and tenant experience.

Document	Contents	Effect on Tenants
Tenant Fitting Out Manual (this document)	Parts 1–13 and 15; Appendices A–Q, T–Z and AA	Binding as provided in the Lease and this Manual
Asset Performance Platform Standard	Part 14 and Parts 16–36; Appendices AB–AG	Internal standard published for transparency on the Tenant Portal; no tenant obligations except where a clause expressly states

- **Cross-reference structure:** Part numbering and appendix lettering are aligned across both documents. **Parts 1–13, 15 and Appendices A–Q, T–Z, AA** are contained in the *Tenant Fitting Out Manual*; **Part 14, Parts 16–36 and Appendices AB–AG** are contained in the *Asset Performance Platform Standard*.
- **Tenant-facing commitments:** Service Charter (2.4), performance dashboards (11.10), survey response protocol (Appendix Z.3), and data rights (5.6; Appendix AA).
- **Awards and contractor performance:** The Awards Programme (11.9) and contractor scorecard tiers (8.6) are established in this Manual, with detailed guidance provided in the *Asset Performance Platform Standard* and Tenant Portal (Appendices AC and AD).

PART 1A - WELCOME TO THE BUILDING

Introduces the building, the tenant fit-out process, key commitments, and the standards that support building performance and tenant experience.

1A.1 Welcome from Asset Management

Commitment - Asset Management is committed to providing high-quality tenant experience throughout the tenancy lifecycle, from lease commencement and fit-out to occupancy and ongoing operations.

Purpose of the Manual - This Tenant Fitting Out Manual supersedes all previous editions and serves as the primary reference for design standards, technical requirements, sustainability obligations, and Green Lease requirements applicable to the Premises.

Tenant Responsibilities and Support - Tenants are required to review this Manual and engage qualified consultants and contractors early to ensure compliance. The Building Management Office and Sustainability Team are available to provide guidance throughout the fit-out process.

1A.2 Future Value 2030 — Our Sustainability Blueprint

's Future Value 2030 sustainability blueprint commits to:

- **Net Zero Carbon:** Achieving net zero carbon across 's portfolio by 2050, supported by SBTi-validated targets.
- **Green Building Performance:** Maintaining BCA Green Mark Super Low Energy Platinum certification throughout the building lifecycle.
- **Tenant Sustainability Partnership:** Supporting tenants in ESG reporting and Green Mark for Interiors (GMI) certification.
- **Responsible Construction:** Promoting Green and Gracious Builder practices across all fit-out contractors and vendors.
- **Circular Economy:** Encouraging resource-efficient fit-out, construction, and reinstatement practices.
- **Healthy Workplaces:** Delivering high standards of indoor air quality, biophilic design, and workplace wellness

: Every fit-out at a property is a direct contribution to Singapore's national sustainability goals and 's corporate decarbonisation roadmap. Together, we are building a greener future.

1A.3 Building Vision & Green Mark

commercial assets are designed and operated to achieve BCA Green Mark certification. Many assets hold the highest rating, Green Mark Super Low Energy Platinum. The Building's applicable certification is set out in the Building Addendum.

Green Mark Rating	As specified in the Building Addendum
Energy Performance	As specified in the Building Addendum; minimum Green Mark standard applies
Scope 2 Grid Factor	0.402 kg CO ₂ e per kWh (EMA 2025 reference; updated annually)
Carbon Tax (2026)	S\$45 per tonne CO ₂ e — escalating to S\$50–80 per tonne by 2030
GMI Standard	All fit outs designed to BCA Green Mark for Interiors Gold minimum (effective 1 Nov 2025)
Net Zero Target	portfolio net zero by 2050; SBTi-aligned near-term targets

1A.4 Building Facts

► **See Part 14A.** Building-specific requirements, including capacities, performance targets, operating hours, and contact details, are set out in the Building Addendum (Appendix O). Tenants shall verify all building-specific requirements against the Addendum prior to commencing design.

Address	[See Building Addendum]
Development	[See Building Addendum]
Total Office GFA	Approximately 350,000 sq ft NLA
Typical Floor Plate	Approximately 15,000 sq ft NLA
Floor-to-ceiling Height	Approximately 2.9 m
Raised Floor	150 mm raised floor system (office floors)
ACMV System	Central chilled water fan-coil system; BMS-integrated
Fire Protection	Fully wet-piped sprinkler system; addressable fire alarm
Power Supply	22 kV substation with N+1 redundancy; UPS-capable risers
Lifts	Passenger, service and cargo lifts; BMS-integrated access control
Car Park	Multi-storey car park; EV charging points available
Bicycle Facility	End-of-trip facilities: secure bicycle storage, showers, lockers
Digital Infrastructure	Fibre-ready risers; building-wide IoT backbone; smart metering AMR
Tenant Portal	[See Building Addendum — portal URL and access details]

1A.5 Digital Portal & QR Code Access

The Building's Tenant Portal is your digital gateway throughout your tenancy. All submissions, bookings, sustainability data and documentation are managed through the Portal. The portal URL and access instructions are provided in the Building Addendum.

- Online PTW and drawing submission
- Lift booking and delivery scheduling
- Inspection and commissioning booking
- Real-time electricity and water consumption dashboard
- Monthly sustainability data reporting
- Access to approved contractor lists and technical standards
- Green Completion Pack submission
- Defect reporting and tracking
- As-built drawing archive
- O&M manual repository

NOTE: The Tenant Portal is the primary submission channel. Physical submissions are accepted only where expressly required. Ensure at least one staff member is registered on the Portal before commencement of work.

PART 1B – DEFINITIONS & INTERPRETATIONS

Sets out key definitions, interpretation rules, stakeholder responsibilities, approval requirements, and the order of precedence for this Manual.

1B.1 Definitions

Unless the context otherwise requires, the following terms apply throughout this Manual. Defined terms are capitalised. Where a conflict exists between a definition in this Manual and the Lease Agreement, the definition in the Lease Agreement shall prevail.

Landlord

The owner of the building, including its successors, assigns, managing agents, the Building Management Office (BMO), Asset Management, and any authorised representative.

Tenant

The tenant, lessee, or licensee named in the Lease Agreement, including its successors, permitted assigns, employees, agents, contractors, consultants, occupiers, and other authorised representatives.

Premises

The space leased or licensed to the Tenant, including all associated fixtures, finishes, and installations.

Appointed Contractors / Consultants

Architects, designers, engineers, Qualified Persons, contractors, sub-contractors, and other consultants engaged by the Tenant for fit-out works.

Nominated Base Contractor

A contractor nominated or approved by the Landlord to carry out works involving base-building systems, including systems covered by existing warranties.

Landlord's Qualified Persons (QPs)

Engineers, architects, Licensed Electrical Workers (LEWs), and other professionals appointed or nominated by the Landlord to review, vet, or endorse Tenant works. Associated fees shall be borne by the Tenant.

Building

The development in which the Premises are located, including its structure, building services, common areas, certifications, and associated property.

Building Addendum

The asset-specific schedule (Appendix O) containing local requirements, approved parties, fees, technical constraints, authority requirements, forms, and contact information.

Green Completion Pack

The sustainability documentation required upon completion of fit-out works, including applicable energy, carbon, materials, indoor environmental quality, and waste management records.

Sustainability Liaison Officer (SLO)

The Tenant's designated representative responsible for sustainability, Green Mark, Green Lease, and ESG reporting obligations under this Manual.

Note: Building-specific information, including approved contractors, Qualified Persons, applicable fees, and local requirements, is provided in the Building Addendum (Appendix O)

1B.2 Rules of Interpretation

The following rules apply to the interpretation of this Manual:

General Interpretation

- References to the singular include the plural and vice versa.

- References to a gender include all genders.
- References to a person include individuals, partnerships, companies, corporations, and other legal entities.
- References to a party include its successors and permitted assigns.

Tenant Responsibilities

- The Tenant is responsible for the acts, omissions, and compliance of its employees, agents, occupiers, Appointed Contractors/Consultants, and all persons acting on its behalf.
- Where multiple parties comprise the Tenant, their obligations are joint and several.

Approvals and Landlord Rights

- Any approval, consent, endorsement, or no-objection required under this Manual shall mean the Landlord's prior written approval.
- The Landlord may grant, withhold, or impose conditions on any approval at its discretion unless expressly stated otherwise.
- The Landlord and its authorised representatives may enter the Premises, upon reasonable notice (except in emergencies), to inspect, test, maintain, repair, or protect the Building and its systems.

Compliance and Costs

- References to legislation, regulations, codes, standards, and certifications include all amendments, replacements, and subsidiary legislation from time to time.
- All costs, fees, penalties, charges, and expenses payable by the Tenant under this Manual shall be payable on demand and may be recovered as a debt or deducted from the fit-out deposit.

Third-Party Contractors and Consultants

- Landlord-appointed or Landlord-approved Qualified Persons, Nominated Base Contractors, and other third parties are independent entities and shall not be deemed agents or employees of the Landlord.
- The Tenant shall have no claim against the Landlord arising from the acts, omissions, defaults, or negligence of such parties.

Document Hierarchy

- Headings are provided for convenience only and do not affect interpretation.
- In the event of any inconsistency, the order of precedence set out in this Manual and the Building Addendum shall apply.
- The Lease Agreement shall prevail over this Manual where a conflict exists.

NOTE: Asset-specific parties — the names of the Landlord's Qualified Persons and Nominated Base Contractors, their vetting fees, and the local contractor lists — are not set out here. They are recorded in each Building Addendum (Appendix O) so that this Part applies unchanged across all -managed assets.

PART 2 – THE TENANT JOURNEY

Sets out the end-to-end fit-out journey, including design and approval stages, key timelines, stakeholder responsibilities, service standards, and occupancy requirements.

2.1 Overview

This Part outlines the fit-out process from lease execution to reinstatement. Each stage has defined deliverables, approval requirements and responsibilities. The Building Management Office (BMO) will coordinate the Tenant's fit-out journey throughout the project lifecycle.

2.2 The 13- Stage Fit-Out Journey

Stage 1 – Lease Award (Day 0)

Upon execution of the Lease Agreement, the Landlord will issue the Notice of Possession (NOP). The Tenant shall register on the Tenant Portal and submit all required deposits and insurance documentation before commencement of the fit-out process.

Stage 2 – Design Briefing (Within 5 Days of NOP)

The Tenant shall attend a kick-off meeting with the Building Management Office. Technical requirements, sustainability requirements, and applicable submission forms, including Forms G1 and G2, will be introduced at this stage.

Stage 3 – Concept Submission (Within 21 Days of NOP)

The Tenant shall submit its proposed layout, material palette, and sustainability strategy for preliminary review. The Landlord will endeavour to issue comments within five (5) working days.

Stage 4 – Detailed Submission (Minimum 21 Working Days Before Works)

The Tenant shall submit the complete design package, including all architectural, structural, ACMV, electrical, fire protection, plumbing, ELV, BMS, signage, and sustainability documentation required under this Manual.

Stage 5 – Technical Review (Within 10 Working Days)

The Landlord's Qualified Persons shall review the submission and issue consolidated comments. The Tenant shall address all comments and submit revised documentation where required before final endorsement.

Stage 6 – Statutory Approval

The Tenant shall obtain all approvals, licences, permits, and clearances required by the relevant authorities, including BCA, SCDF, PUB, NEA, and any other applicable authority. Landlord approval shall not constitute statutory approval.

Stage 7 – Permit to Work (Prior to Commencement of Works)

The Tenant shall obtain an approved Permit to Work (PTW), submit all required supporting documents, maintain valid insurance coverage, and satisfy all deposit requirements. No fit-out works shall commence until written PTW approval has been issued.

Stage 8 – Construction

All works shall be carried out in accordance with approved submissions, site rules, safety requirements, environmental controls, delivery protocols, and EHS Rules for Vendors. The Tenant shall ensure that the site is maintained in a safe and orderly condition throughout the construction period.

Stage 9 – Testing & Commissioning

The Tenant shall complete testing and commissioning of all relevant systems in accordance with Part 9, including electrical, ACMV, fire protection, waterproofing, BMS integration, and other applicable building systems. The Landlord may require attendance or witnessing of tests.

Stage 10 – Inspection & Handover

Upon completion of works, the Tenant shall arrange a joint inspection with the Landlord, rectify all outstanding defects, and submit all required handover documentation, including as-built drawings, operation and maintenance manuals, BIM deliverables, meter schedules, and the Green Completion Pack.

Stage 11 – Occupation

The Premises may only be occupied upon receipt of the relevant Occupation Permit or Temporary Occupation Permit, where required. The Defects Liability Period shall commence upon handover. Release of the fit-out deposit shall be subject to compliance with all close-out requirements.

Stage 12 – Operations

Throughout the tenancy, the Tenant shall comply with applicable Green Lease obligations, sustainability reporting requirements, indoor environmental quality requirements, and any operational performance monitoring requirements specified in this Manual.

Stage 13 – Reinstatement

Before lease expiry, the Tenant shall submit a Reinstatement Circular Design Plan and complete all approved reinstatement works. Final inspection, waste diversion verification, and any remaining compliance requirements shall be completed before release of the reinstatement deposit, where applicable.

2.2 Timeline Overview

Milestone	Timing	Key Action
NOP Issued	Day 0	Register on Tenant Portal. Pay deposit. Arrange insurance.
Kick-off Meeting	Day 5	Building Management + Tenant + Fit-out contractor. Briefing pack issued.
Concept Submission	Day 21	Layout, palette, sustainability intent.
Detailed Drawings	Day 21 (min. 21 WD before works)	Full drawings package + PTW checklist + Forms G1 & G2.
Landlord Review	Day 31 (target)	QP comments issued. Resubmission and sign-off.
PTW Approval	Before any works	No work without approved PTW.
Works Completion	Per lease rent-free period	Joint inspection. T&C complete. Green Completion Pack submitted.
Deposit Release	After joint inspection and clearances	As-builts, BIM, manuals submitted. Defects cleared.

2.3 STAGE 0 — FRONT-END FEASIBILITY REVIEW

Purpose

The Stage 0 Feasibility Review is intended to identify building constraints and suitability requirements prior to design development, reducing the risk of redesign, delays and abortive work.

It is required for:

- Fit outs of 1,000 sqm or more, and headquarters or flagship projects subject to Design Review Panel (DRP) review (Part 3.7).
- High-load or specialist uses, including F&B, cineplexes, medical facilities, laboratories, gyms, and wellness facilities.

- Mission-critical facilities, including server rooms, AI infrastructure, trading floors, and disaster recovery suites (Part 7.11).
- Projects requiring supplementary cooling, standby power, additional riser capacity, or structural strengthening.

Scope of Review

- **Structural Capacity** – suitability of floor loading for the proposed layout, storage systems, equipment, plant, and specialised installations.
- **Cooling & Environmental Capacity** – availability of chilled water, condenser water, after-hours cooling, and other environmental control requirements.
- **Electrical Infrastructure** – available power capacity, distribution arrangements, rising main capacity, and standby power provisions where applicable.
- **Building Services Connectivity** – availability of space within wet, dry, electrical, and ICT risers to accommodate proposed services.
- **Sustainability & Certification Requirements** – alignment with the Net Zero Fit-Out Standard, Green Mark for Interiors (GMI) pathway, and applicable Green Mark obligations.
- **Climate Resilience Considerations** – assessment of known flood risk, operational resilience factors, and heat-load considerations relevant to the tenancy.

Process and Outcome

The Tenant shall submit a Stage 0 request via the Tenant Portal, together with the proposed use, headcount, indicative layout, and any special operational requirements.

will issue a written **Feasibility Statement** within ten (10) working days, setting out any identified constraints, available capacities, and conditions relevant to the proposed fit-out.

The Feasibility Statement shall form part of the basis for subsequent design submissions under Part 6. Design submissions that materially conflict with the Feasibility Statement may be returned for amendment or resubmission.

NOTE: Stage 0 is free of charge for qualifying projects. It does not constitute design approval — all submissions under Part 6 still apply.

2.4 FIT-OUT CONCIERGE

Single Point of Accountability

Each fit-out project will be assigned a dedicated **Fit-Out Manager** from Stage 0 or upon first submission. The Fit-Out Manager serves as the Tenant's primary point of contact and coordinates 's review, approval, inspection, and handover processes throughout the fit-out lifecycle.

The appointment of a Fit-Out Manager does not alter the responsibilities of the Tenant or its Appointed Contractors/Consultants under this Manual.

Ownership

Activity	Lead	Tenant Lead
Stage 0 Feasibility Statement (2.3)	Fit-Out Manager	Tenant project lead
Design review & DRP coordination (3.7, 6)	Fit-Out Manager	Tenant's designer / QP
PTW, site rules, inspections (8)	Building Manager	Tenant's main contractor
Commissioning & digital handover (9, 10.6)	Fit-Out Manager	Tenant's PE / contractor

Activity	Lead	Tenant Lead
Operational readiness & occupation (10.7)	Building Manager	Tenant's FM lead
Green Lease & dashboard onboarding (5, 11.10)	Sustainability team	Sustainability Liaison Officer (4.9)

Escalation Pathway

Any issue that remains unresolved may be escalated in the following order:

1. **Fit-Out Manager** – response within two (2) working days.
2. **Building Manager** – response within a further three (3) working days.
3. **Asset Manager** – written response within five (5) working days.

2.5 SERVICE CHARTER & TENANT FEEDBACK (“YOU SAID, WE DID”)

is committed to delivering the following service standards throughout the fit-out process:

Service Commitment	Standard
First-pass design approval rate	> 80% of complete submissions (Part 6)
Permit to Work processing	< 3 working days from complete application (8.2)
Design review turnaround	< 10 working days to consolidated comments (3.7, 6)
Deposit refund	< 14 days from cleared refund checklist (8.3, 10.5)
Service requests	Acknowledged 1 working day; resolved 5 (18-series commitments delivered via the Tenant Portal)
Tenant satisfaction / NPS	> 90% satisfied; NPS ≥ +40 (Appendix Z)

Governance and Reporting

Governance arrangements, measurement methodologies, and portfolio-level reporting requirements are set out in the Asset Performance Platform Standard. The service commitments and response standards applicable to tenants are contained in this Manual.

Tenant Feedback

welcomes feedback through tenant surveys, post-occupancy evaluations (POEs), and other engagement channels.

Where feedback is received, will provide a written **"You Said, We Did"** response within sixty (60) days. Relevant outcomes may be communicated through the Tenant Portal in accordance with Appendix Z.3.

NOTE: The Fit-Out Concierge model is intended to facilitate coordination and communication only. All submission, technical, statutory, safety, and compliance obligations set out in this Manual remain unchanged.

PART 3: DESIGN EXCELLENCE

Establishes 's design, sustainability, wellness, and workplace planning expectations to promote high-quality, future-ready tenant spaces aligned with the building's architectural vision and performance objectives.

3.1 Design Vision

seeks to maintain a consistent standard of design excellence across its commercial portfolio. Tenant fitouts should complement the Building's architectural character while supporting sustainability, occupant wellbeing, adaptability, and operational performance.

This Part sets out 's design principles and expectations. It should be read as a design framework to guide quality outcomes and not solely as a compliance checklist.

Design Theme	Objective
Arrival & Frontage	Reception areas, shopfronts, signage and visible interfaces must be refined, coordinated and consistent with the Building's architectural image. No exposed unsightly fixtures, unauthorized coverings or protruding signs are permitted.
Transparency & Visual Quality	Visible areas should demonstrate design clarity, high-quality detailing and controlled lighting. Visual clutter, temporary finishes and poor cable management are not acceptable.
Materials & Workmanship	Durable, low-emission, maintainable materials are expected. Samples, mock-ups or cut sheets must be submitted where requested by the Landlord.
Flexibility	Layouts should be open, flexible and reconfigurable, reducing future churn, reinstatement waste and embodied carbon.
Wellness	Design should support occupant wellbeing through daylight, glare control, thermal comfort, acoustics, low-VOC materials, biophilia, ergonomics and inclusive access.
Maintainability	Access to Landlord equipment, meters, risers, ceiling services, façade components and fire/life safety systems must always remain unobstructed.
Digital Readiness	Metering, BMS interface, sensors, asset registers and digital handover information should be designed from the outset — not retrofitted at completion.

3.2 Architectural Intent

3.2.1 Reception & Entry Sequence

Reception and entry areas should provide a welcoming, accessible and visually coherent arrival experience consistent with the quality standards of the Building.

- Create a welcoming, light-filled arrival experience with clear sightlines from the lift lobby
- Use materials of demonstrable quality: natural stone, solid timber, glass, metal — supported by EPDs or equivalent certification
- Integrate biophilic elements: living walls, planted features, natural textures or nature-inspired artwork
- Maximise glazing transparency to maintain visual connection with the building's shared spaces
- Design for universal accessibility from Day 1 — not as an afterthought
- Reflect the tenant's brand identity with restraint and sophistication

3.2.2 Office Frontage & Shopfront

Office frontages and tenant demise boundaries visible from common areas shall be consistent with the Building's architectural character.

- Full-height glazed frontages with aluminum framing are encouraged for office floors facing lobbies

- Solid walls facing common corridors require high-quality finishes (stone, premium plaster, solid-faced panels)
- Signage: refer to building signage policy in Part 6. No ad-hoc signage on glass frontages without approval
- All frontage works require Landlord approval before submission to BCA

3.2.3 Lighting Quality

Lighting design is one of the most impactful contributors to workplace experience and energy efficiency.

- General office: 300–500 lux maintained on the working plane (EN 12464-1)
- Reception: 150–300 lux ambient; feature/accent lighting to enhance architectural quality
- Flicker-free LED throughout: driver output frequency >200 Hz; flicker percent <30%
- UGR ≤16 for workstations; UGR ≤19 for general circulation
- CRI ≥90 for reception, client-facing and premium spaces; ≥80 for back-of-house
- Tunable white lighting (2700–6500K) encouraged for human-centric lighting applications
- Emergency lighting: minimum 1 lux on evacuation routes, automatic test function

3.3 Material Palette & Sustainability Credentials

's design standard requires materials that are beautiful, durable and responsibly sourced. The following criteria define the Preferred Material Selection Hierarchy:

Priority	Criterion	Evidence
1 — Highest	Reused or recycled from existing fit-out	Material provenance record; waste diversion manifest
2	EPD-backed (ISO 14025 / EN 15804)	EPD certificate; SGBC/IBU/EPD Australasia registration
3	SGBC Green Building Product (SGBP) ≥2 ticks	SGBP certificate
4	Singapore Green Label Scheme (SGLS) certified	SGLS certificate
5	FSC or PEFC certified (all timber / wood products)	Chain of custody certificate

Restricted Materials

The following are not permitted without express written consent:

- PVC flooring (alternatives: LVT with recycled content, natural rubber, linoleum, bamboo, certified timber)
- Carpet tiles with bitumen backing (alternatives: recycled PET backing or carpet tiles with EPD)
- Solvent-based paints and adhesives (low-VOC water-based only)
- Urea-formaldehyde (UF) adhesives in MDF or particleboard (use E0 or E1 rated alternatives)
- Ozone-depleting refrigerants (HCFCs, CFCs); refrigerants with GWP >750 are restricted

3.4 Biophilic Design

encourages the integration of biophilic design principles to support occupant wellbeing and workplace experience.

- Living walls, planter boxes or potted plants in reception, collaboration zones and break areas
- Natural materials with visible texture and grain: timber, stone, woven textiles
- Nature-inspired artwork, murals or pattern language derived from natural forms
- Maximise connection to external views and daylight in primary workspaces
- Water features in reception or break areas where feasible

- Circadian lighting profiles that follow natural daylight patterns

3.5 Wellness & Universal Design

3.5.1 Wellness Infrastructure

- End-of-trip facilities: the building provides secure bicycle storage, showers and lockers. Tenants are encouraged to designate these as formal employee benefits.
- Mother's rooms / lactation rooms: a private, lockable space with a comfortable chair, a power point and a small refrigerator is recommended for tenancies > 3,000 sq ft
- Prayer rooms / quiet rooms: a dedicated space free from hotdesking for individual contemplation or prayer is encouraged
- Ergonomic workstation design: adjustable desks, monitor arms and ergonomic seating should be specified as standard, not premium options
- Acoustic comfort: refer to Part 7 (Technical Standards) for Rw requirements. Provide phone booths or acoustic pods in open-plan offices with >50 workstations

3.5.2 Universal Design (UD)

All fit-out designs shall comply with the BCA Universal Design Guide and shall be assessed by a BCA-accredited Universal Design Mark consultant for tenancies >1,000 m².

- Step-free access throughout the tenancy from main entry
- Reception counter with low-counter section (maximum 850 mm)
- At least one fully accessible toilet in tenancies with private toilet facilities
- Consideration of sensory needs: acoustic refuge, wayfinding, lighting

3.6 Branding Principles

Tenant branding is encouraged within the Premises, provided it remains consistent with the Building's branding, signage and architectural requirements.

- Tenant branding: signage, graphics and brand installations are warmly encouraged within the tenancy
- Outward-facing identity: lobby-facing signage requires Landlord approval; see Part 6
- Art and installation: original artwork and sculptural elements are encouraged. Reproductions of known works require copyright clearance
- Digital displays: LED display walls and digital art are permitted within the tenancy subject to EMC compliance and light spill management
- Brand colours and materials: no restriction on the tenancy. Where visible from common areas, palette should complement the building's tone

3.7 DESIGN REVIEW PANEL (DRP)

Purpose

operates a formal Design Review Panel for projects with a significant impact on the asset's architecture, frontage or brand. The DRP elevates the review from code compliance to design curation, protecting long-term asset quality for all occupiers.

Projects Referred to the DRP

- Fit outs of 1,000 sqm or more.
- Headquarters offices and other anchor tenancies.
- Flagship retail stores.
- Premium frontage locations — ground floor, atrium-facing, sky lobby or other high-visibility frontages.
- Wellness-certified projects targeting WELL or Fitwel certification (Part 4.7.2).

Review Criteria

- Design excellence — coherence of concept, spatial quality, detailing and finish (Part 3.1–3.3).
- Sustainability — alignment with the Net Zero Fit-Out Standard and GMI pathway (Part 4).

- Universal design — inclusive access and wellness provisions (Part 3.5).
- Frontage quality — transparency, activation and contribution to the shared environment (Parts 3.2.2 and 13.1).
- Building branding impact — compatibility with the Building’s architectural intent and signage policy (Parts 3.6 and 6).

Process

The panel’s composition, terms of reference and submission templates are set out in Appendix W.

3.8 DESIGN SUBMISSION SCORECARD

Purpose

In addition to the pass/fail technical review under Part 6, every full design submission is scored against five weighted categories. The scorecard gives tenants and their designers clear, structured feedback and recognizes design quality that goes beyond minimum compliance.

Scoring Categories and Weights

Category	Weight	Primary Reference
Design Quality	25%	Part 3 — Design Excellence
Sustainability	25%	Part 4 — Sustainability Framework; GMI pathway
Wellness	15%	Parts 3.5 and 4.7 — Universal design, IEQ, WELL / Fitwel
Smart Building	10%	Parts 4.8, 7.9 and 7.10 — BMS, network and smart provisions
Technical Compliance	25%	Parts 6 and 7 — Submissions and Technical Standards

Fit-Out Ratings

- **Platinum Fit-Out** — overall score of **85%** or above.
- **Gold Fit-Out** — overall score of 70% to **84%**.
- **Standard Fit-Out** — approved submission below **70%**.
- Retail & F&B tenancies — frontage quality (Part 13.1) is scored as a named sub-criterion within Design Quality and hoarding & graphics quality (13.3) within Technical Compliance.

Ratings are issued with the letter of approval and may be referenced in the Tenant's own communications. Platinum and Gold projects are eligible for feature in tenant engagement and sustainability publications and contribute to the Green Tenant Recognition Programme (Part 11.9).

NOTE: The scorecard supplements — and never relaxes — the mandatory requirements of this Manual. A submission cannot be approved on score alone if any mandatory requirement is unmet.

3.9 WORKPLACE PLANNING BENCHMARKS

Purpose

These benchmarks supplement the occupancy and utilization data requirements set out in Part 7.10. They are intended as guidance only and do not impose mandatory design requirements. Tenants and their designers may use the benchmarks to assess proposed layouts against prevailing Grade A workplace standards, while informing the anonymized portfolio insights published through the Tenant Dashboard in accordance with Part 11.10.

Reference Ranges (Grade A Office, Guidance Only)

Metric	Typical Range	Notes
Workspace density	8– 12 m² per workpoint	10– 14 m² with desk-sharing ratios of 0.6–0.8 in hybrid models
Meeting seats	1 seat per 8–10 workpoints	Weighted to 4–6 person rooms; fewer large boardrooms
Collaboration : focus mix	30– 40% collaborative settings	Open collaboration, project and social space
Focus / quiet rooms	≥ 1 per 20 workpoints	Acoustically rated per Part 4.7.4
Peak utilization planning	Design to 70– 85% measured peak	Validated against 7.10 occupancy analytics after move-in

Using the Benchmarks

- Fit-outs of 1,000 sqm or more are encouraged to declare target density and utilisation assumptions as part of the design submission.
- Post-occupancy utilisation data may be reviewed against the original design intent through the POE process.
- may publish anonymised portfolio benchmarking data to support workplace planning.

PART 4 – SUSTAINABILITY FRAMEWORK

's Net Zero Fit-Out Standard outlines sustainability requirements related to energy, carbon, materials, wellbeing, smart-building integration, performance monitoring, and tenant sustainability obligations throughout the tenancy lifecycle.

4.1.1 Net Zero Fit-Out Standard

Every fit-out at a property is governed by 's Net Zero Fit-Out Standard: design and specify to reduce operational energy, embodied carbon, water consumption, waste and indoor environmental impact — consistent with the Building's Green Mark rating and 's 2050 net-zero roadmap.

Parts 4, 5 and 11 constitute 's Green Lease sustainability requirements for tenant design, fit-out, alteration, operation, monitoring and reporting. Compliance with Parts 4, 5 and 11 shall constitute compliance with 's Green Lease sustainability obligations, subjects always to the Lease Agreement and any Building Addendum containing stricter requirements.

This Part establishes 's sustainability requirements and performance expectations for tenant fit-outs. Compliance with Parts 4, 5 and 11 forms part of 's Green Lease framework and supports the Building's sustainability, decarbonisation and Green Mark objectives.

- BCA Green Mark 2021 (2nd Edition, effective 1 June 2024): Scope 1 & 2 operational carbon disclosure mandatory; Scope 3 embodied carbon mandatory at GoldPLUS/Platinum
- BCA Green Mark for Interiors (GMI, effective 1 November 2025): unified interior fit-out standard replacing all prior user-centric schemes; all fit-outs to GMI Gold minimum
- SGX/ACRA ISSB-aligned disclosure: Scope 1 & 2 mandatory FY2025 (all listed issuers); Scope 3 from FY2026 (STI constituents). Fit-out material choices are now financial disclosure items
- Singapore carbon tax: S\$45 per tonne CO₂e from January 2026; target S\$50–80/tonne by 2030. Energy-efficient design directly reduces your carbon cost exposure

4.1.2 Sustainable Fit-Out Framework — Nine Pillars

Pillar	Key Requirements
Energy	Lighting power budget ≤5 W/m ² for office areas. Efficient lighting controls, plug-load management, supplementary cooling efficiency and post-occupation energy review for major/high plug-load premises.
Carbon	Major fit-outs to provide energy and carbon baseline. Scope 1, 2 and 3 activity data provided where applicable. Refrigerants to meet GWP limits and leakage reporting requirements.
Materials	Prioritise SGBC/SGLS/FSC/PEFC/EPD-certified, recycled-content, low-VOC, durable and take-back materials. Major fit-outs to submit embodied carbon assessment and materials register.
Circular Economy	Prioritise reuse over replacement. Target 30% reuse by value of existing furniture/fit-out elements or 20% recycled content in new materials where practical. Adopt design for disassembly.
Water	Minimum 3-tick WELS fittings. Water meters for major water uses. Leak detection for wet areas and major water installations.
Waste	Major fit-outs and reinstatements to target minimum 75% diversion by weight from landfill through reuse, recycling or recovery where technically and commercially practicable.
Indoor Environment	Low-VOC paints, adhesives, sealants, carpets and composite wood. IAQ testing for major/sensitive premises. Acoustic, thermal, lighting and air quality considerations.
Wellbeing	Consider WELL, Fitwel or equivalent principles for major/headquarters fit-outs, including air, light, sound, water, ergonomics, inclusive design and occupant feedback.

Pillar	Key Requirements
Smart Building	Tenant systems to be compatible with Building BMS/AMR platform where required. CO ₂ , occupancy, temperature and metering data to support performance analytics and Green Lease reporting.

4.2 ENERGY

4.2.1 Lighting Power Budget — SS 530:2024

requires compliance with SS 530:2024 (current edition) and the Green Lease lighting requirements. The Lighting Power Budget for office spaces shall be not more than 5 watts per square meter (W/m²) or shall achieve minimum 60% improvement over SS 530:2014 Reference (maximum building interior lighting power density for compliance), whichever is stricter. Restaurants, lounges and bars shall not exceed 5 W/m², and toilets and changing rooms shall not exceed 4 W/m². The measured indoor lighting levels shall comply with the recommended illuminance (average lux level) stated in SS 531:2013 or prevailing standards.

- Supplementary Lighting: If task lighting or decorative lighting is installed, it should be included in the lighting power load (for task lighting) and the equipment power load (for decorative lighting). Agreement with the Landlord is required, pending Green Mark requirements.
- All light fittings shall be energy saving and should be LED or better. Dimmable feature should be considered for greater energy efficiency where lighting levels can be controlled per user requirements.
- LED lights shall comply with LM80 B30 L70@50,000; DC output type complying to IEC 62384 and IEC 61347 Part 1 and Part 2-13; and ANSI/IES LM-79-19 and LM-80-15 testing.

Space Type	Max LPB (Building)	SS 530:2024 Baseline	GMI Gold Requirement
Office workstations, meeting rooms	5.0 W/m ²	Per SS 530:2024 table	≥10% below baseline
Reception, lounge, client areas	5.0 W/m ²	Per SS 530:2024 table	≥10% below baseline
F&B — restaurant, café, bar	5.0 W/m ²	Per SS 530:2024 table	≥10% below baseline
Toilets, changing rooms	4.0 W/m ²	Per SS 530:2024 table	≥10% below baseline

4.2.2 Lighting Controls (Mandatory for all fit-outs)

- Occupancy / vacancy sensors: all enclosed spaces (meeting rooms, phone booths, private offices, toilets)
- Time scheduling with local override: open office areas
- Daylight harvesting: photocell / BMS-linked for perimeter zones within 3 m of external glazing
- Separate lighting circuits by zone: open office; meeting rooms; enclosed offices; pantry; storage
- Lighting Control: Occupancy or vacancy sensor shall be provided to adjust the dimming level of the light fixtures or automatically turns light off when motion is no longer detected. Lighting control shall include occupancy sensors and interlocked perimeter lighting with local overrides; enclosed spaces shall have dedicated light switches and auto switch off when not in use.

4.2.3 Energy, Utility and ESG Data Reporting

The Tenant shall provide, where applicable, monthly or periodic electricity, chilled water, water, waste recycling, construction waste, fuel, refrigerant, occupancy intensity and other ESG data reasonably required by the Landlord for Green Mark, Green Lease, asset performance, decarbonisation and corporate reporting purposes.

4.2.4 ACMV Design — Energy Performance

- Zone control: each zone ≤100 m² with dedicated thermostat. Temperature setpoints not below 24°C.
- Air distribution efficiency: ≤0.16 kW/RT (fan coil + supply fan).

- Supplementary cooling <10 kW: minimum NEA 5-tick. >10 kW: minimum NEA 3-tick. VRF: 4-tick with occupancy and temperature sensors.
- Air balancing report certified by QP at completion.
- Demand Control: Automatic controls for the air-conditioning system to respond to periods of non-use or based on measured occupancy.
- Newly installed equipment shall be easily accessible for maintenance.
- Enclosed areas shall be provided with dedicated thermostat controls (e.g. meeting rooms, closed offices, conference facilities) with auto shut off or ramp down when not in use.

4.3 CARBON — SCOPE 1, 2 AND 3

4.3.1 SCOPE 1 — DIRECT EMISSIONS (REFRIGERANTS + COMBUSTION)

Scope 1 covers emissions from tenant-owned or tenant-controlled sources: (a) refrigerant leakage from supplementary cooling, server room cooling or auxiliary ACMV; (b) direct fuel combustion from diesel generators, gas kitchen equipment or LPG appliances.

- The Tenant shall maintain a refrigerant inventory and report significant refrigerant leakage events.
- Use lower-GWP refrigerants where technically feasible.
- Report significant refrigerant leakage events to the Landlord.
- Install leak detection for supplementary cooling systems exceeding 20kW cooling capacity.

4.3.2 SCOPE 2 — INDIRECT EMISSIONS (ELECTRICITY)

Grid emission factor: 0.4085 kg CO₂e per kWh (EMA 2024 reference). updates this factor each January. Market-based Scope 2 accounting: tenants may purchase RECs under SS 673:2021 or participate in 's building-level REC procurement. Notify by 30 November each year.

- The Landlord provides annual assessments of tenant electricity consumption based upon tenant submissions.
- Tenant is to liaise with the Landlord's nominated contractor, SP Digital, to scope and supply additional plug or receptacle load electrical meters, which will be connected back to the Landlord's building utilities monitoring system.
- Tenants shall set, monitor and report an annual energy intensity target of 75 Kilowatt hours per square meter per year (kWh/m²/yr) based on a 55-hour week, unless a stricter target is stated in the Building Addendum.
- Equipment Plug Load – Average 16 W/m².

4.3.3 SCOPE 3 — VALUE CHAIN EMISSIONS (EMBODIED CARBON + WASTE)

Under emerging ESG disclosure requirements, fit-out material selection may contribute to Scope 3 emissions reporting and embodied carbon disclosure obligations.

- For fit-outs >1,000 m² or >\$500,000 CV: submit embodied carbon assessment using SBCC/BECC tool and EPD materials register.
- Prioritise materials with EPDs aligned to ISO 14025 / EN 15804.
- Submit construction waste manifests (weight, category, licensed disposal) in the Green Completion Pack.
- Carbon Tax: S\$45/tCO₂e (Jan 2026), rising to S\$50–80/tonne by 2030. Energy-efficient design reduces your exposure.

4.4 GREEN MARK FOR INTERIORS (GMI) CERTIFICATION

The BCA Green Mark for Interiors (GMI) scheme (effective 1 November 2025) is the unified standard for interior fit-out sustainability certification, replacing all previous user-centric schemes. All fit-outs shall be designed to GMI Gold minimum. may provide available base-building information and supporting documentation required for GMI submissions.

GMI Pillar	Focus Area	Key Requirements
1. Energy Efficiency (Mandatory)	LPD vs SS 530:2024	≥10% LPD improvement for all GMI tiers. Occupancy sensors. Daylight controls. ACMV zone controls.
2. Whole-Life Carbon	Embodied carbon + circular	SBCC/BECC assessment. EPD-backed materials. Reuse/retention credits for existing elements.
3. Health & Wellbeing	IAQ, acoustics, biophilic	CO ₂ sensors. Low-VOC materials (<50 g/L). Rw ≥40 dB enclosed spaces. IAQ test 3-month steady-state.
4. Resilience	Circular, adaptive design	Modular/demountable fit-out. Water sub-metering. Flexible layouts. Climate-adaptive envelope.
5. Intelligence	Smart controls + IoT	BMS integration for ACMV and lighting. CO ₂ /occupancy sensors. AMR sub-metering. Digital twin ready.

GMI applications: SGBC portal at <https://gm-interiors.sgbc.online>. Notify at design stage if pursuing formal GMI certification — will provide sub-metering data, BMS records and energy consumption to support your submission.

4.5 MATERIALS & CIRCULAR ECONOMY

4.5.1 SUSTAINABLE MATERIALS PRIORITY

Apply the priority hierarchy in Part 3.3. For major fit-outs: minimum **30%** by value of existing elements reused, or 20% recycled content in new materials.

4.5.2 MATERIAL SELECTION REQUIREMENTS

FLOOR FINISHES

Floor finishes have the greatest single environmental impact as they tend to be replaced at the end of every lease cycle. For floor coverings such as carpet tiles, laminate flooring, vinyl flooring and floor coatings, choose environmentally friendly products certified under the Singapore Green Labelling Scheme (SGLS) or Singapore Green Building Council (SGBC) — minimum SGBP 2 ticks or equivalent. Preferred attributes:

- Modular (tiles) — easier to replace partially, reducing waste
- High recycled content
- Low-VOC carpet tiles
- Minimum PVC content where alternatives are available

Reference: SGBC Product Certification Directory at sgbc.online/certification-directory/products/ and Singapore Green Labelling Scheme at sgls.sec.org.sg

Walls and Ceilings

- Use wall laminates, dry walls and ceiling boards with recycled content certified under SGLS or SGBC — minimum SGBP 2 ticks or equivalent
- Ensure acoustic comfort and enhance indoor environmental quality by using wall-mounted sound absorption panels that use less raw materials
- Demountable and modular wall systems are preferred to reduce future waste and embodied carbon

Furniture

- Avoiding materials and furniture containing a high level of Volatile Organic Compounds (VOC) as long-term exposure contributes to sick building syndrome
- Design should be of easy assembly and dismantling type to encourage reuse and recycling at end of lease
- Use mechanical fixings in lieu of adhesives to maintain good indoor air quality and enable future disassembly
- Prioritise FSC or PEFC certified timber; take-back programmes where available

- Furnishings, furniture and carpets shall be certified with at least SGBP 2 ticks or equivalent by local certification bodies, contain recycled materials where available and be low VOC.

4.5.3 DESIGN FOR DISASSEMBLY

Fit-out works shall adopt modular furniture, mechanical fixings and demountable partitions where practicable. At lease expiry, provide with a Reinstatement Circular Design Plan identifying elements for retention, donation, resale or recycling. This reduces strip-out waste, lowers reinstatement costs and reduces Scope 3 emissions for both parties.

4.5.4 CONSTRUCTION WASTE

For major fit-outs (>300 m²): prepare a Construction Waste Management Plan targeting minimum 75% waste diversion from landfill. Waste reporting shall include metals, timber, gypsum, plastics, cardboard, electronic waste and general waste. On-site segregated streams: clean timber; metal; concrete; gypsum board; plastics; cardboard; e-waste; hazardous waste; general refuse. Final waste report (weight by stream, diversion rate, licensed facility) in Green Completion Pack.

4.5.5 ACOUSTIC DESIGN

Office layout should be designed to avoid noise generated by utility rooms, AHU rooms, server rooms and other noise sources. Where such layouts are unavoidable, provide proper acoustic insulation to attenuate noise and minimise reverberation. Appropriate measures include:

- Sound-absorbing dividers and wall panels
- Sound-dampening furniture and finishes (acoustic pods, wall hangings, fabrics)
- Noise cancellation techniques such as sound masking
- Insulation to prevent noise disturbance to other occupants and adjacent tenancies
- Measured indoor sound levels shall comply with prevailing SS 553

4.5.6 INDOOR PLANTS AND BIOPHILIC FEATURES

Tenants are encouraged to incorporate low-maintenance indoor plants (such as planters, potted plants and vertical greenery) which can:

- Release moisture into the air
- Absorb heat and noise, improving the acoustic and thermal environment
- Improve productivity, lower workplace stress

4.5.7 FLEXIBLE LAYOUT

Tenants are encouraged to adopt flexible workplace layouts that support future reconfiguration and reduce reinstatement waste & should consider:

- Open and flexible layout with minimum enclosed space
- Space savers, compactors and mobile stations to save storage space
- Agile working facilities such as hot-desking
- Multi-functional spaces such as pantry areas adaptable for town-hall sessions and small meetings
- Central areas for administrative facilities (printers, photocopiers, stationery)

4.6 WATER EFFICIENCY

4.6.1 GENERAL REQUIREMENTS

All water fittings shall comply with WELS minimum 3 ticks (pub.gov.sg/wels). Install flow restrictors and isolating valves at all tee-off points. For tenancies >500 m² with private toilet facilities: install water sub-meters and leak detection. Track monthly water consumption via the Tenant Portal.

4.6.2 KITCHEN AND PANTRY

- Choose water-efficient fittings complying with PUB Water Efficiency Labelling Scheme (WELS) — minimum 3 ticks

- Install water dispensers to reduce use of bottled water and disposable cups and encourage use of reusable cups
- Display water conservation posters at water usage areas within the Premises

4.6.3 PRIVATE WATER SUB-METERING

- To allow continual monitoring of water use, install private meters for major water uses in the office
- Install a leak detection system with alert features for early detection of leaks and abnormal consumption — this can significantly reduce water bills and prevent damage to adjacent tenancies

4.6.3 APPLIANCES AND EQUIPMENT

- Choose energy-efficient chiller, freezer and dishwasher of the right capacity with NEA Energy Labelling Scheme rating
- All appliances to be within NEA energy efficiency guidelines or Energy Star of best rating at the time of installation
- Use Mandatory Energy Labelling Scheme (MELS) regulated appliances with highest tick-rating (e.g. 5 ticks for television; 4 ticks for refrigerator; 3 ticks for lamp)
- Energy Star or NEA Energy Efficiency Labelling rating as a minimum requirement for all applicable office equipment

4.7 INDOOR ENVIRONMENTAL QUALITY (IEQ)

4.7.1 VOC AND MATERIALS

All interior paints, varnishes, sealants and adhesives shall be low VOC using natural and water-based products where possible and shall be certified with at least SGBP 2 ticks or equivalent by local certification bodies. VOC content: <50 g/L for paints; <100 g/L for adhesives; <50 g/L for sealants and primers, or a stricter Building Addendum limit if applicable.

- Paints, adhesives, sealants, carpets and composite wood products shall be low-VOC certified where available
- Tenants are encouraged to incorporate indoor plants, daylight access, nature-inspired materials and green walls to improve workplace wellness
- Minimise airborne contaminants to promote a healthy indoor environment
- Use biodegradable, hydrocarbon-free cleaning products certified to SGBP 2 ticks or equivalent
- Use non-chemical natural pesticides for pest control wherever possible
- Avoid eating at workstations — food smell can invite pests

4.7.2 HEALTH & WELLNESS PATHWAY

encourages fit-out designs that support occupant health, wellbeing and workplace performance through recognised sustainability and wellness frameworks.

Wellness baseline — all fit-outs

- Low-VOC materials throughout (paints < 50 g/L; adhesives < 100 g/L), verified by certification.
- Daylight access and glare control to primary workspaces; flicker-free lighting per SS 531.
- Thermal comfort with individual zone control at 24°C and above; acoustic separation $R_w \geq 40$ dB for enclosed spaces (SS 553).
- Access to filtered drinking water; ergonomic desks, seating and monitor arms specified as standard.

Wellness plus — major & headquarters fit-outs (> 1,000 m²)

- CO₂ and occupancy sensing linked to the BMS, with air quality visible to occupants where practicable (mirroring leading assets that give tenants live IAQ readings).
- Biophilic provision: planting, natural materials and views designed into primary spaces — not decorative afterthoughts.
- Inclusive-design and wellness amenities: accessible routes and reception, mother's/lactation room, and a quiet/contemplation room (encouraged for tenancies > 3,000 sq ft).
- A Post-Occupancy Evaluation of occupant comfort within 6–12 months, shared with .

Formal WELL / Fitwel certification — support

Tenants pursuing WELL or Fitwel should notify at design stage. As with GMI, will provide the base-building evidence a submission needs — the building's own health credentials (e.g. enhanced filtration, water quality, Green Mark Health & Wellbeing badge), sub-metering and IAQ data, and access for verification. Notify of the target standard and rating on Form G1.

NOTE: Wellness-certified space supports talent attraction and retention, feeds the tenant's own ESG reporting, and — alongside the building's Green Mark rating — strengthens lease competitiveness for the whole asset. 's support turns a tenant cost into a shared advantage.

4.7.3 IAQ TESTING

For fit-outs >300 m²: conduct IAQ testing not later than 3 months after steady-state occupancy. Use a BCA-approved or NEA-accredited laboratory. Parameters: formaldehyde (HCHO); TVOC; PM2.5; PM10; CO; CO₂. Submit results to within 30 days. Remediation and repeat testing within 60 days where any limit is exceeded.

- Conduct pre-occupancy flush out after the completion of construction and all fitting-out of interior finishes (including fixed furniture and furnishings) for all occupied spaces to remove the contaminants.
- Local isolation and exhaust systems shall be provided to remove pollutants at source e.g. utility areas (for printing and photocopying), toilets, cleaning and chemical storage.
- Monitoring systems shall ensure optimal thermal and indoor air quality standards as set out in SS 554:2016 or prevailing standards.
- Indoor CO₂ levels compared to outdoor CO₂ levels shall be not greater than 700 Parts Per Million ("PPM") measured in accordance with SS 554:2016 or prevailing standard as amended or replaced.
- Ventilation and air conditioning systems shall be regularly inspected, cleaned and maintained to ensure the required ventilation provision into occupiable spaces according to SS553:2016 or prevailing standards.

4.7.4 ACOUSTIC COMFORT

Indoor sound levels: SS 553 (prevailing edition). Enclosed offices, meeting rooms, phone booths: minimum Rw ≥40 dB between tenanted and adjacent spaces. Acoustic performance reports required for major fit-outs.

4.7.5 THERMAL COMFORT

Zone temperature setpoints: 24°C and above. Provide individual zone controls. Thermal comfort survey recommended within 6 months of occupation.

4.8 SMART BUILDING & BMS INTEGRATION

The Building Management System (BMS) supports energy management, building operations, security monitoring and sustainability reporting. All tenant ACMV, lighting and sub-metering systems must be BMS-compatible. M&E QP must confirm compatibility before plan endorsement.

- For tenancies >500 m²: CO₂ sensors (min. 1 per 50 m² in enclosed spaces); occupancy sensors in all enclosed spaces; temperature sensors in server rooms
- Tenant Portal dashboard: real-time electricity and water consumption, available from Day 1 of occupation
- Digital Twin readiness: BIM as-built in IFC format at LOD 300 for fit-outs with CV >\$1 million
- IoT backbone: the Building's IoT infrastructure is available for tenant sub-systems integration upon request
- Energy dashboard: provides monthly building-level benchmarks against which tenants can assess their own performance

4.9 Sustainability Liaison Officer (SLO)

All tenants shall designate a Sustainability Liaison Officer (SLO) within 30 days of lease commencement and submit Form G2 (Appendix D) to Asset Management. The SLO shall be responsible for:

- Coordinating sustainability data requests;
- Supporting annual Green Lease reviews;
- Participating in benchmarking exercises;

- Facilitating audits and meter verification; and
- Notifying of any change in appointment within 14 days.

4.10 EMBODIED CARBON REQUIREMENTS

Embodied Carbon Performance Requirements

Parts 4.3.3 and 4.5 establish the reporting foundation (Appendix G — Materials and Embodied Carbon Register). This section adds measurable limits so fit-out embodied carbon is governed, not merely recorded. Values below are portfolio defaults; Building Addenda may tighten but not relax them.

Mandatory Requirements

- Reporting — all projects: complete Appendix G with cradle-to-practical-completion (modules A1–A5) emissions using EPD data where available.
- Intensity limit — major fit-outs ($\geq 1,000$ sqm): total fit-out embodied carbon shall not exceed **350 kgCO₂e/m²** (A1–A5); a best-practice target of 250 kgCO₂e/m² earns full marks in the 3.8 scorecard sustainability category and Recognition Programme scoring (11.9, Appendix V).
- Methodology — assessments follow EN 15978 module boundaries applied to interior fit-outs, using SS 673 / BCA-recognised carbon factors and SGBC-listed EPDs; the method statement is submitted with Appendix G.
- Reuse-first hierarchy — in order: retain in place; reuse on-site or from the circularity stream (12.4); certified recycled content; rapidly renewable / bio-based; virgin materials last, with justification.
- Recycled content — minimum **30%** by cost across the five highest-value material categories of the project.
- Retained materials — renewal-in-place fit-outs shall retain at least 20% by value of the existing fit-out (ceilings, raised floors, partitions, joinery), evidenced in Appendix G.

Linkage

Performance against this section is scored in the Design Submission Scorecard (3.8), contributes to Green Tenant Recognition (11.9) via Appendix V, and is tracked as a portfolio KPI (Part 14).

NOTE: Intensity limits are reviewed annually against SGBC/BCA benchmarking and Building Addenda; projects with exceptional structural or heritage constraints may apply for a documented variance through the DRP.

PART 5 – GREEN LEASE SUSTAINABILITY REQUIREMENTS

Establishes the Green Lease framework governing sustainability commitments, performance monitoring, data governance, reporting, and collaboration between and tenants.

5.1 A Partnership for Sustainability

's Green Lease framework establishes a collaborative approach to sustainability performance between the Landlord and Tenant. supports sustainability outcomes through building infrastructure, certification, operational systems, and data platforms, while tenants contribute through responsible fit-out design, operational practices, and data sharing.

This framework recognises that building sustainability performance depends on active participation from both the Landlord and its occupiers.

: has developed this Green Lease framework to exceed the standard unilateral "Tenant shall" approach. commits explicitly — and asks you to commit in return. Together, we create a building that is better for our tenants, our investors, our community and our planet.

5.2 Commitments

Certification and Building Performance

- Maintain BCA Green Mark Platinum Super Low Energy (SLE) certification, or equivalent successor certification, during the applicable certification period.
- Maintain WiredScore Platinum and SmartScore Platinum certifications during the applicable certification period.

Design and Operational Support

- Provide guidance on water-efficient design and water consumption calculations.
- Support tenants in assessing power consumption and energy-efficient fit-out design.
- Provide operational support to improve energy and water performance.
- Provide annual assessments of tenant electricity consumption based on submitted data.

Waste and Resource Management

- Provide recycling infrastructure and dedicated waste segregation facilities.
- Implement portfolio-wide 3R (Reduce, Reuse, Recycle) programmes where operationally feasible.
- Conduct annual waste audits.

Tenant Engagement

- Conduct annual sustainability education programmes.
- Conduct Post-Occupancy Evaluation (POE) surveys at least once every three years.

Active Mobility Facilities

- Provide bicycle parking, showers, lockers and changing facilities where available within the Building or Building Addendum.

Sustainability Data and Digital Platforms

- Provide monthly electricity and water consumption data where available.

- Maintain the Tenant Portal as the primary sustainability reporting and submission platform.
- Support tenants pursuing GMI certification.

5.3 Tenants Commitment

Governance and Compliance

- Comply with the Net Zero Fit-Out Standard and the sustainability requirements in Parts 4, 5 and 11.
- Designate a Sustainability Liaison Officer (SLO) and maintain an active appointment throughout the tenancy.
- Submit Forms G1 and G2 where required.

Energy and Building Performance

- Comply with lighting power, lighting control, ACMV, sub-metering, and energy-performance requirements in Part 4.
- Monitor and report energy performance in accordance with applicable targets and Building Addendum requirements.

Water Efficiency

- Install compliant WELS-rated fittings and water meters where applicable.
- Monitor water consumption and implement water-efficiency measures.

Materials and Waste Management

- Use sustainable, low-VOC, certified materials and equipment as required under Part 4.
- Implement recycling and resource management measures.
- Participate in waste reduction and sustainability initiatives.

Indoor Environmental Quality

- Conduct IAQ flushing, testing, monitoring, and maintenance as required.
- Maintain indoor environmental performance in accordance with Part 4.

Reporting and Data Sharing

- Provide sustainability and ESG data as required under Parts 4, 5 and 11.
- Submit refrigerant, waste, IAQ, and embodied carbon information where applicable.

5.4 Sustainability Data Exchange Protocol

Data Category	Direction	Frequency	Channel
Electricity consumption (kWh, by meter)	→ Tenant	Monthly, 10 WD	Tenant Portal
Water consumption (m³)	→ Tenant	Monthly	Tenant Portal
EMA Scope 2 grid emission factor	→ Tenant	Annual (January)	Email + Tenant Portal
REC allocation (where applicable)	→ Tenant	Annual	Sustainability report
Building-level EUI benchmark	→ Tenant	Annual	Annual Review meeting
Refrigerant inventory + leak records	Tenant →	Annual (31 Jan)	Email / Tenant Portal

Data Category	Direction	Frequency	Channel
Diesel / gas fuel consumption (Scope 1)	Tenant →	Annual (31 Jan)	Email / Tenant Portal
Construction waste manifests	Tenant →	At completion	Green Completion Pack
IAQ test results	Tenant →	At completion / remediation	Green Completion Pack
Embodied carbon assessment output	Tenant →	At design + completion	SBCC/BECC PDF

Data ownership, privacy, retention, portability, access rights and validation under this protocol are governed by Section 5.6 and Appendix AA. The data schema and quality flags in Appendix AA.1 apply to all machine-readable exchanges above.

5.5 Annual Green Lease Performance Review

and the Tenant's Sustainability Liaison Officer (SLO) shall conduct an Annual Green Lease Performance Review to assess sustainability performance, data quality, and improvement opportunities. The review is intended to support continuous improvement and shared sustainability objectives.

- Prior year electricity and water consumption vs. baseline
- Prior year energy intensity (kWh/m² per year) vs. building benchmark
- Carbon footprint: Scope 1 (refrigerant) + Scope 2 (electricity) + Scope 3 (waste, selected materials)
- Waste recycling rate and any operational waste reduction initiatives
- IAQ status and any maintenance or IEQ concerns
- Progress against any energy or carbon reduction commitments
- Review of Improvement Roadmap for the coming year
- update on building-level sustainability initiatives and upcoming capital works
- Annual data-quality statement (Appendix AA.6) — completeness, estimated-data share and open data queries

The review is intended to support continuous improvement and shared sustainability objectives. Its purpose is shared accountability, not penalty. Where performance falls short of targets, and the Tenant will agree a jointly owned Improvement Roadmap.

5.6 DATA GOVERNANCE & TENANT DATA RIGHTS

Purpose

This Manual generates operational data throughout the tenancy — metered energy and water (Appendix I), indoor environmental quality and **occupancy analytics** (Part 7.10), asset and maintenance data (Part 10.6), waste records (Part 11.4), scorecard outcomes (Part 3.8) and survey responses (Appendix Z). This section establishes who owns that data, how it may be used, how long it is kept, and the rights each party has to it. It forms part of the Green Lease bilateral data sharing protocol (Part 5.4) and is implemented technically through Appendix AA.

Ownership and Licence

- Data generated within or about the Tenant's demised premises (tenancy consumption, tenancy IEQ, tenancy occupancy, tenancy waste, survey responses) is owned by the Tenant.
- The Tenant grants a non-exclusive licence to collect, store, process and use tenancy data for: (a) building operations and safety; (b) Green Lease performance review (5.5); (c) benchmarking in aggregated or anonymised form; (d) statutory, ESG and investor disclosure per Appendix V; and (e) the Recognition Programme (11.9), with the Tenant's participation.
- Data about base-building systems, common areas and the Building as a whole — including the Building **digital twin** — is owned by . Benchmark and dashboard views (11.10) are licensed to the Tenant for internal use and may not be republished without consent.

- **Digital twin** and portfolio analytics: tenancy data incorporated into **digital twins** or portfolio analytics is used only for the licensed purposes above; tenant-identifiable outputs are not disclosed externally without consent. Neither party shall commercialise the other party's data without prior written consent; disclosure to service providers requires confidentiality terms consistent with this section.

Personal Data and Privacy

- Both parties comply with the Personal Data Protection Act 2012 (PDPA) and successor legislation.
- Occupancy and utilisation analytics shall avoid personal data: counting and utilisation sensing is anonymised and aggregated at zone or floor level before any transmission to . Camera-based analytics require prior written approval and must process images at the edge with no image retention.
- Survey responses are reported to in aggregate; individually attributable responses are visible only to the survey administrator unless the respondent opts in.

Retention, Portability and Handback

- Retention periods follow Appendix AA.2; on expiry, data is deleted or irreversibly anonymised.
- At lease end the Tenant may request one machine-readable export (CSV or JSON via the Tenant Portal) of its tenancy consumption, IEQ and waste data for the lease term; provides it within thirty (30) days at no charge. may retain anonymised tenancy data for **portfolio benchmarking**.
- Handback: tenant-installed data-bearing devices are wiped or credential-rotated at reinstatement (Part 12); the as-left points list and credentials for any retained systems are handed to .

Access, Accuracy and Audit

- Access rights follow the matrix in Appendix AA.3; access is role-based, individually credentialed and revoked on personnel change.
- Data-accuracy queries are resolved through the dashboard validation process in Appendix AA.6; an annual data-quality statement is tabled at the Annual Green Lease Performance Review (5.5).
- Either party may audit the other's compliance with this section on reasonable notice, not more than once per year, at its own cost.

NOTE: This section does not reduce any obligation in Parts 7.9 or 7.10 or Appendix T. Where this section and the Lease Agreement conflict, the Lease Agreement prevails.

5.7 GREEN LEASE SUSTAINABILITY REQUIREMENTS

Purpose and operative status

This section converts 's Green Lease obligations into the Manual's operative sustainability governance framework. The requirements in Parts 4, 5 and 11 constitute 's Green Lease sustainability requirements and shall apply to all tenants unless superseded by a Building Addendum containing stricter requirements.

Compliance with Parts 4, 5 and 11 shall constitute compliance with 's Green Lease sustainability obligations.

No sustainability obligation shall depend on a tenant separately referring to a building-specific reference schedule. Building-specific copies reproduced in Part 14A.4 are retained for legal traceability only and do not displace the operative requirements in Parts 4, 5 and 11.

Where a Building Addendum, asset-specific schedule or Lease Agreement contains a stricter sustainability requirement, the stricter requirement applies. Where there is a conflict with the Lease Agreement, the Lease Agreement prevails.

5.7.1 Green Lease governance hierarchy

- Parts 4, 5 and 11 are the master sustainability compliance documents for tenant fit-out, alteration, operation, monitoring, reporting and reinstatement across -managed assets.
- The Landlord may issue a Building Addendum containing asset-specific capacities, targets, certifications, hours, operational constraints or stricter requirements; such stricter requirements supplement and do not relax this Manual.
- The Tenant shall comply with this Manual, the Lease Agreement, all applicable laws, Authority requirements and all Landlord approvals, design guidelines and written instructions.

5.7.2 SHARED SUSTAINABILITY COMMITMENT

The landlord and tenant(s) are committed to manage, operate and occupy the building and premises to promote environmental sustainability, through energy efficiency improvements, positive behavioural changes and healthy practices. This document forms a part of the lease agreement with penalties for non-conformity.

5.7.3 CERTIFICATION & SMART-BUILDING COMMITMENTS

The Tenant agrees that the Landlord shall be entitled to operate, manage and maintain the building so as to achieve at least the BCA Green Mark Platinum-SLE under Green Mark 2021 or the future applicable BCA Green Mark certification standard. The landlord commits to maintain this level of certification during the certification period.

The Tenant agrees that the Landlord shall be entitled to operate, manage and maintain the building so as to achieve at least the WiredScore's WiredScore Platinum and SmartScore Platinum certification standards. The landlord commits to maintain this level of certification during the certification period.

5.7.4 BUILDING MANAGEMENT AND TENANT DESIGN SUPPORT

Tools to support tenant to calculate design water consumption and to provide up-to-date information and advice on water fittings, equipment.

Assistance in assessment of the overall power consumption, including lighting design review, and providing design advice for the Tenants as a part of their fit out / renovation.

Provide support to the tenant during operations to reduce the tenant operational consumption of energy and water.

5.7.5 WASTE MANAGEMENT, RECYCLING AND 3R PROGRAMME

Engage a waste contractor to provide sufficient recycling receptacles that are easily accessible by tenants, and dedicated space for separate collection and segregation of waste and recyclables (e.g. paper/cardboard, plastics, glass, metals, e-waste).

Implement a 3R (reduce, reuse, recycle) programme that involves tenant participation, when the desirable tenant occupancy rate is achieved.

Waste audit conducted annually to identify and quantify the sources, amount and types of waste generated in the premises. A waste audit entails the following: (i) create an audit checklist for all waste types generated from each tenant premises, (ii) collect waste samples from all tenant premises, (iii) sort the waste into different types according to the checklist and (iv) weigh the waste types, record the data and analyse results to identify opportunities for waste reduction and recycling.

5.7.6 WATER EFFICIENCY AND METERING

- Installation of 3-ticks Water Efficiency Labelling Scheme (WELS) fittings for premises.
- Installation of 3-ticks Water Efficiency Labelling Scheme (WELS) fittings within the Tenants' premises, where applicable.
- Tenant to display water conservation posters at water usage areas within its own premises.
- Provision of private water meters to monitor all major water usage such as pantries, kitchens, toilets and washing areas, where applicable and at least monthly monitoring of premises' water usage.

5.7.7 MONITORING, REPORTING AND DATA SHARING

- Provide annual assessments of tenant electricity consumption based upon tenant submissions.
- Monitoring and reporting of tenant consumption with annual average consumption of electricity within its Premises to 75 Kilowatt hours per square meter per year (kWh/m²/yr) based on 55-hour week.
- Equipment Plug Load – Average 16 W/m²

The Tenant shall provide, where applicable, monthly or periodic electricity, chilled water, water, waste recycling, construction waste, fuel, refrigerant, occupancy intensity and other ESG data reasonably required by the Landlord for Green Mark, Green Lease, asset performance, decarbonisation and corporate reporting purposes.

5.7.8 TENANT ENGAGEMENT, EDUCATION AND POE

The Tenants shall participate in a Post Occupancy Evaluation (POE) survey conducted once every 3 years by Building Management and take corrective action accordingly where applicable.

The Tenants shall participate in any waste management/3R training/education organised by the Building Management.

5.7.9 REDUCING CAR DEPENDENCY

- Adequate provision of secure and sheltered bicycle storage.
- Showers, changing rooms and lockers for cyclists.

5.7.10 TENANT CERTIFICATION AND COMPLIANCE OBLIGATION

The Tenant agrees that it shall use its best endeavours to comply with all the provisions of this Lease, the guidelines and prescriptions in the Fitting Out Manual and any other document issued by the Landlord or the Management Corporation from time to time on environmental sustainability in carrying out fitting-out works, addition and alteration works in the Premises and in connection with its occupation of the Premises pursuant to this Lease (including, but not limited to, co-operating with the Landlord and the relevant authorities if and when requested to review its energy consumption in connection with its operations at the Premises).

5.7.11 LIGHTING POWER, ILLUMINANCE AND CONTROLS

The Tenant shall comply with the lighting power, illuminance, lighting control and equipment requirements set out in Part 4.2.

5.7.12 ACMV AND CONTROL SYSTEMS

The Tenant shall comply with the ACMV performance, zoning, equipment efficiency, controls and maintenance requirements set out in Part 4.2.

5.7.13 MATERIALS, FIT-OUT AND EQUIPMENT

The Tenant shall comply with the sustainable materials, circular economy and equipment requirements set out in Parts 4.5 and 4.6.

5.7.14 CLEANING, WASTE AND INDOOR CONTAMINANTS MANAGEMENT

Cleaning and Consumables

- Cleaning contractors shall use products certified to at least SGBP 2 ticks or equivalent.
- NEA-registered pesticides and vector-control products shall be used where required.

Purchasing and Resource Management

- Work with suppliers to minimise disposable packaging.
- Prioritise products with recycled content and reduced packaging.
- Use reusable alternatives in place of single-use items where practicable.

Facilities and Operations

- Provide reusable crockery, cutlery, cups and similar items where practicable.
- Promote digital workflows and electronic records to reduce paper consumption.
- Provide recycling facilities within the Premises for paper, cardboard, plastic, glass and metal.
- Participate in building waste-monitoring and reporting programmes where required.

PART 6 – DESIGN SUBMISSION REQUIREMENTS

Establishes the submission, review and approval framework for fit-out works, including drawing requirements, responsibilities, statutory compliance and protection of building systems and certifications.

6.1 SUBMISSION PROCESS OVERVIEW

All design submissions shall be submitted through the Tenant Portal or such other platform as may be directed by the Building Management Office.

The Landlord will acknowledge receipt of complete submissions within two (2) working days and will endeavour to issue review comments within the review periods set out below.

Incomplete, inaccurate or uncoordinated submissions may be returned without review.

IMPORTANT: Detailed design submissions shall be made not less than twenty-one (21) working days prior to the proposed commencement of fit-out work. Landlord review does not constitute Authority approval. The Tenant remains responsible for compliance with all statutory and regulatory requirements.

SUBMISSION TIMELINE

Stage	Submission	Review Period	Notes
Stage 3 — Concept	Layout, palette, sustainability intent	5 WD	Informal; no fee. Identify issues early.
Stage 4 — Detailed	Full drawings + calculations + ESG checklist	10 WD	Formal review. Must be complete.
Stage 5 — Resubmission	Comment responses + revised drawings	5 WD	All comments must be addressed.
Stage 7 — PTW	Full PTW checklist (Part 8) + endorsed drawings	3 WD	No works without PTW approval.

6.2 DRAWING SUBMISSION MATRIX

The following matrix defines required submissions by discipline across three stages. Submissions must be complete, coordinated and legible. Drawings must clearly distinguish existing, retained, removed, new and relocated works. Submit in PDF and AutoCAD/Revit format.

Discipline	Concept Submission	Detailed / PTW Submission	Completion / Handover Deliverables
Architectural / Interior Design	Layout, RCP, elevations, sections, frontage/signage concept, material palette.	Coordinated drawings at 1:100 or 1:50, door/partition/ceiling details, material samples/cut sheets, accessibility provisions.	As-built plans, final materials register, photos, defects closed, QP-architect endorsement.
Structural	Identify heavy loads, compactus, safes, openings, wet areas, KOPs or drilling requests.	PE/QP calculations, load assessment, spreader design, method statement, authority submission where applicable.	PE/QP certificates, as-built structural details, inspection records.

Discipline	Concept Submission	Detailed / PTW Submission	Completion / Handover Deliverables
Electrical / ELV	Preliminary load schedule, DB/isolator locations, lighting concept, special loads.	LEW-endorsed single-line diagram, load schedule, LPB, meter schedule, controls, emergency/exit lighting, harmonics strategy.	Statement of turn-on, meter commissioning, LEW certificate, LPB report, as-builts, DB/circuit labelling.
ACMV / Supplementary Cooling	Zoning concept, enclosed room strategy, server/data room loads, after-hours cooling needs.	QP-endorsed ACMV drawings, airflow calculations, thermostat/sensor layout, ducting, dampers/VAV, BTU meter, BMS interface, water treatment/flushing method.	Air balancing report, T&C reports, BTU/BMS commissioning, water quality tests, as-builts.
Plumbing / Sanitary / Wet Areas	Locations of pantry, kitchen, sinks, drainage, wet areas, water meters, leak detection.	Licensed Plumber/PE drawings, pipe schematics, waterproofing details, WELS fittings, pressure test method, leak detection and auto-isolation details.	Pressure test, ponding test, waterproofing warranty, meter account opened, as-builts.
Fire / Life Safety / PA	Fire strategy implications, sprinkler/detector changes, PA coverage, fire extinguisher locations.	QP/FSE endorsed drawings, SCDF/FSSD submissions, Nominated Base Contractor involvement, sprinkler drainage permit, PA interface, DECAM/SAP linkage.	SCDF/FSSD approvals/FSC, sprinkler/PA/fire alarm tests, maintenance certificates, as-builts.
BMS / Smart Building	Identify tenant systems requiring integration, sensors, energy dashboard and data needs.	BMS points list, protocol details, network segregation plan, sensor locations, metering compatibility, commissioning plan.	Integrated testing record, points list, trend log screenshots, data access confirmation, cybersecurity approval.
Sustainability / Green Lease	Preliminary Green Fit-Out Acknowledgement, GMI target, energy baseline approach, materials strategy.	Energy/carbon baseline, materials and embodied carbon register, waste plan, IAQ plan, REC/refrigerant details, SLO designation timeline.	Green Completion Pack, final registers, waste report, IAQ evidence, initial ESG data submission.
F&B / Kitchen Exhaust	Cooking type, exhaust/make-up air strategy, odour/grease control, fire suppression concept.	QP-endorsed exhaust, UV-C/carbon filtration, fan acoustic calculations, fire suppression, grease/odour removal specs.	T&C records, acoustic compliance test, maintenance manual, SFA licence where applicable, as-builts.
ICT / ELV / Security	Data outlet layout concept, CCTV/access control concept, Cat6e/fibre schematic.	Cabling layout, patch panel schedules, network segregation plan, access card compatibility details.	Cabling test records, as-builts, network approval confirmation.

6.3 RESPONSIBILITIES

6.3.1 RESPONSIBILITIES OF THE TENANT

- The Tenant shall be responsible for:
- Compliance with this Manual, the Lease Agreement, Building Rules and Regulations, all applicable laws and regulations, including the Workplace Safety and Health Act (Cap. 354A), and all Authority requirements.
- Obtaining all approvals, permits, licences, endorsements, consents and no-objections required for the fitting-out works.
- Protection of the Building's Certificate of Statutory Completion (CSC), base-building systems, warranties, certifications and sustainability performance.
- Appointment and direct payment of the Landlord's Qualified Persons and Nominated Base Contractors where required under this Manual.
- Proper supervision and coordination of all fitting-out works.
- Compliance with all sustainability, carbon reporting and Green Lease obligations in Parts 4, 5 and 11.
- Ensuring compliance by all employees, agents, consultants, contractors, occupiers and persons acting on the Tenant's behalf.
- Monitoring occupancy load and any change of use impacting fire, sanitary, traffic or statutory provisions.

6.3.2 RESPONSIBILITIES OF THE TENANT'S DESIGNER

- Preparing and submitting fitting-out plans for Landlord review.
- Coordinating all Authority submissions and approvals.
- Providing copies of all Authority correspondence, comments, approvals and amended submissions to the Landlord for record.
- Demonstrating compliance with all applicable technical, sustainability and Green Lease requirements.
- Addressing and incorporating comments issued by the Landlord and the Landlord's Qualified Persons.
- Designing works to protect base-building systems, warranties, certifications and operational performance.

6.3.3 RESPONSIBILITIES OF THE LANDLORD

The Landlord's role under this Manual is limited to review, coordination and protection of the Building.

Accordingly:

- Landlord review, comment, endorsement, approval or no-objection does not constitute Authority approval.
- No statutory responsibility is transferred to the Landlord by reason of any review or endorsement.
- The Landlord assumes no design liability for the Tenant's works.
- The Landlord shall not be responsible for any act, omission, default, misconduct or negligence of the Tenant, its consultants or contractors, including the Landlord's Qualified Persons and Nominated Base Contractors.
- The Landlord acts primarily to protect the integrity, warranties, systems, certifications and operational performance of the Building.

6.4 GENERAL REQUIREMENTS

The following requirements shall apply to all submissions and fitting-out works:

- The Landlord reserves the right to reject, amend or require modification of any proposal that does not comply with applicable laws, Authority requirements, Building standards, Green Mark requirements, sustainability objectives or certification obligations.
- Landlord review, endorsement, comment or no-objection shall not constitute approval by any Authority.
- The Tenant remains solely responsible for obtaining all statutory approvals, licences, permits and clearances required for the proposed works.
- Any material change to endorsed drawings, calculations, specifications or methodologies shall be resubmitted for review and approval before implementation.
- Drawings prepared using Landlord base drawings shall comply with the Landlord's prescribed numbering and document-control conventions.
- All submissions shall clearly identify:
 - Existing works;
 - Demolition works;
 - New works;
 - Relocated works;
 - Dimensions and levels; and
 - Material specifications.
 - Drawings shall be complete, coordinated and legible, and shall accurately reflect the extent of the proposed works.

6.5 SPECIALIST WARRANTIES

The Tenant shall not undertake any work that may invalidate, reduce, prejudice or otherwise affect any warranty applicable to the Building or its systems.

Where specialist involvement is required to preserve an existing warranty, the Tenant shall engage the Landlord's nominated specialist contractor or such alternative contractor approved by the Landlord.

All associated costs shall be borne by the Tenant.

6.6 CSC AND STATUTORY CLEARANCES

Fitting-out works must not hinder or affect the Certificate of Statutory Completion (CSC) clearance for the building's base building or AEI works. The Tenant's QP shall track and keep to any timeline stipulated by the Landlord for submissions to the Landlord's Qualified Persons. Late submissions may jeopardise pre-building CSC submission.

Tenant Responsibilities

- The Tenant's QP shall track and coordinate the occupancy load for any change of use, having regard to the base building's toilet, vehicular and fire escape stair provisions.

Refusal of CSC & its impact

- If the issue of CSC is refused, withheld or delayed owing to any works by the Tenant, the Landlord may by notice in writing require the Tenant, at the Tenant's cost and in consultation with the Landlord's consultants, to take corrective measures within 7 days of that notice.
- The Tenant shall indemnify the Landlord against all losses, damages, costs and expenses arising from any delay to the building CSC caused by the Tenant's works.

NOTE: Any Tenant fit-out must comply with ISO 14001 environmental management requirements where applicable. The Tenant and their Appointed Contractors shall submit to the Landlord their Environmental Aspect and Impact Assessment upon request.

6.6A CSC GOVERNANCE AND LANDLORD'S QUALIFIED PERSONS

This section governs the appointment of Qualified Persons for fitting-out works, differentiating the position before and after the Building's base-building Certificate of Statutory Completion (CSC).

A. Pre CSC-Projects

Where the Premises are fitted out before the Building's base-building CSC has been issued, the Tenant shall appoint the Landlord's Qualified Persons for all the following reviews:

- Design vetting
- Authority submissions
- Structural review
- Electrical review
- ACMV review
- Lighting power budget review
- Chilled water review
- Air distribution review
- Green Mark compliance review
- Smart-building integration review

The Tenant acknowledges and agrees that:

- Late submissions which may jeopardise the Building's CSC may be rejected by the Landlord;
- The Tenant shall comply with all comments issued by the Landlord's Qualified Persons; and
- Review, comment or endorsement by the Landlord's Qualified Persons does not constitute approval by the relevant Authorities.

B. Post CSC-Projects

Where the Premises are fitted out after the Building's base-building CSC has been issued, the Tenant may appoint its own Qualified Persons, subject to the Landlord's prior written approval. The Tenant shall obtain the Landlord's mandatory review and written no-objection for any works affecting:

- Structural systems
- Fire protection systems
- Electrical systems
- ACMV systems
- Chilled water systems
- Plumbing systems
- Waterproofing systems
- Telecommunications backbone
- Smart building systems
- the Building Management System (BMS)
- Green Mark certification
- Sustainability performance
- Digital Twin infrastructure

6.6B LANDLORD REVIEW AND NO-OBJECTION PROCESS

All works requiring review under this Part shall follow the formal review process below. The Tenant shall:

- Submit the proposal through the Tenant Portal;
- Allow technical review by Asset Management;
- Allow review by the Building Management Office;
- Allow review by the Landlord's technical consultants where applicable; and
- Obtain the Landlord's written no-objection before commencement of the works.

Commencement of works without the Landlord's written no-objection may result in any one or more of the following:

- Rejection of the Permit to Work (PTW);
- Stoppage of the works;
- Forfeiture of the fitting-out deposit, in whole or in part; and
- Suspension of the Appointed Contractor from the Building.

6.6C NOMINATED BASE CONTRACTOR POLICY

To protect base-building integrity and existing warranties, the Tenant shall use the Landlord's Nominated Base Contractors for works to or interfacing with the following systems:

- Fire protection
- BMS integration
- Electrical tie-ins
- Chilled water systems
- ACMV interface works
- Security systems
- Lift systems
- Life-safety systems
- Any system under active warranty

In respect of the above:

- The Tenant may propose alternative contractors;
- The Landlord may approve alternatives at its sole discretion;
- The Tenant bears all costs of the nominated or approved contractors; and
- Existing base-building system warranties must not be affected, voided or diminished by the Tenant's works.

6.6D PROTECTION OF GREEN MARK, DIGITAL AND ESG PERFORMANCE

The Landlord may require review by the Landlord's Qualified Persons of any works that may affect:

- Green Mark certification
- Green Mark for Interiors certification
- Energy performance
- Carbon reporting
- Sub-metering
- Indoor Environmental Quality
- Smart building infrastructure
- Digital Twin data quality
- ESG reporting capability
- Net Zero Fit-Out performance

The Landlord reserves the right to reject any proposal that, in the Landlord's reasonable opinion, would compromise any of these objectives or the Building's certifications.

6.6E CONSULTANT VETTING FEES

Fees charged by the Landlord's Qualified Persons for the review, vetting and endorsement of Tenant works shall be borne by the Tenant.

Applicable fee schedules are set out in the Building Addendum (Appendix O) and may be revised from time to time.

NOTE: The names of the Landlord's Qualified Persons and Nominated Base Contractors, their vetting fees and the local contractor lists are asset-specific and are set out in each Building Addendum (Appendix O), so that Parts 6.6A–6.6E apply unchanged across all -managed assets.

PART 7 – TECHNICAL STANDARDS

Sets out the minimum technical standards for building services, life-safety systems, digital infrastructure, sustainability performance and smart-building integration.

7.1 INTRODUCTION

This Part establishes the minimum technical requirements applicable to all fit-out works.

Unless otherwise stated, each discipline is structured as follows:

- Purpose;
- Design Criteria;
- Mandatory Requirements;
- Submission Requirements;
- Commissioning and Verification; and
- Completion Requirements.

Cross-references are used where requirements are addressed elsewhere in this Manual.

NOTE: The requirements in this Part are minimum standards only. The Landlord may impose additional requirements necessary to protect Building operations, structural integrity, Green Mark certification, life-safety systems, warranties, digital infrastructure, or the amenity of other occupiers.

7.2 ELECTRICAL

Purpose

To ensure safe, efficient and metered electrical installations consistent with the Building's Green Mark performance requirements and applicable Singapore standards.

Design Criteria

Criterion	Standard
Normal Power Provision	70 W/m ² (inclusive of lighting, ACMV, plug loads)
Standby Power	18 kW per floor (shared); additional capacity subject to availability at S\$1,000/kVA
Lighting Power Budget	5.0 W/m ² maximum (building standard); SS 530:2024 space-type allowances prevail where more stringent
Sub-metering	AMR-compatible for tenancies >500 m ² ; separate meters for lighting, ACMV, plug, server

Mandatory Requirements

Cabling & Containment

- All cables shall be installed in metal conduits or metal cable trunking.
- PVC conduit may only be used within concealed ceiling spaces with QP approval.
- Wiring shall be clearly identified and colour-coded to distinguish Tenant wiring from base-building wiring.
- Wiring shall be installed on cable trays, catenary supports, or slab-fixed supports and shall not:
 - Rest on ceiling tiles
 - Be clipped to sprinkler pipework
 - Be run within data cabling trays
- All trunking and cable trays beneath raised floors shall be raised a minimum of 20 mm above the floor slab.
- Hacking or embedding conduits into structural slabs, walls or columns is prohibited.

Distribution Boards and Protection

- Distribution Boards (DBs) shall be permanently labelled.
- All circuits and GPOs shall indicate DB and circuit number.
- Loads shall be balanced across all phases.
- RCCB protection shall be provided for socket circuits.
- MCB protection should be provided for final circuits.

LEW Requirements

- The Building LEW identified in the Building Addendum shall be engaged for all electrical works.
- Engagement shall be made not less than ten (10) working days prior to energisation.

Harmonics

- The Tenant shall provide all necessary filtering and mitigation measures to comply with IEEE 219 and prevent adverse impacts on Building electrical infrastructure.

Emergency Power and Lighting

- Emergency and exit lighting shall comply with statutory requirements.
- All emergency lighting shall be LED type and maintained by the Tenant.

Lighting Requirements

- Lighting performance, Lighting Power Budget (LPB), lighting controls and energy-efficiency requirements shall comply with Part 4.2.

Electrical Metering Requirements

- For tenancies greater than 500 m²: AMR-compatible meters shall be installed.
- Meter schedules shall identify:
 - Meter ID;
 - Meter location;
 - CT ratio;
 - Meter type; and
 - AMR compatibility.
- Meter records shall be included within the Green Completion Pack.

UPS and Generator Systems - UPS Systems

- The Landlord does not provide UPS systems.
- Any UPS installation proposed by the Tenant shall be submitted for prior review and approval.

- Where connection to the Building's emergency power system is requested, the proposal shall be reviewed by the Building LEW and Landlord's Qualified Persons.
- All associated costs shall be borne by the Tenant.

Generator Sets

- Storage of diesel fuel shall require:
- Authority approval;
- Landlord approval; and
- Diesel leak detection connected to the Building's IBMS.

Commissioning Requirements

The Tenant shall provide:

- Statement of energisation;
- LEW certification;
- Meter commissioning records;
- As-built electrical drawings; and
- Final DB schedules.

Key Standards

- CP5
- SS 530
- SS 531
- EMA Requirements
- IEEE 219

7.3 ACMV (AIR-CONDITIONING & MECHANICAL VENTILATION)

PURPOSE

To ensure ACMV systems operate safely, efficiently and compatibly with base-building infrastructure.

Design Criteria

ACMV systems shall comply with the performance requirements in Part 4.2.4.

Mandatory Requirements

- 1. Air Distribution**
 - All supply air diffusers must include air volume control dampers.
 - Distribution shall not cause cold drafts exceeding 1.5 m/s at occupied zones.
- 2. Temperature Control**
 - Thermostats for fan coil units must be installed at room level (not above ceiling).
- 3. Dust & Pollution Control**
 - During fit out, block off all air diffusers.
 - Tenant to provide blanket filters at each AHU/FCU; filters cleaned weekly.
- 4. Ducting**
 - No flexible ducts on exposed ceilings.
 - Flexible ducting in false ceiling voids are limited to 2,000 mm.
- 5. Air Balancing**
 - New branch ducts require dampers/VAV boxes.
 - Return air grilles must remain unobstructed.
- 6. Chilled Water Quality (See Appendix B for full specifications)**
 - Parameters:
 - i. pH: 9.0–11.0
 - ii. Turbidity: <20 NTU
 - iii. Total iron: <1.0 ppm
 - iv. Total copper: <1.0 ppm
 - v. Conductivity: <2,500 µS/cm
- 7. BMS Integration**
 - All ACMV systems must integrate with the Building's BMS.
 - M&E QP to confirm compatibility before plan endorsement.
- 8. Refrigerant**
 - GWP ≤750.
 - No CFCs or HCFCs.
 - Annual refrigerant inventory required (Part 4.3.1).

Auxiliary Air-Conditioning (After-Hours Chilled Water)

- Provision available for essential areas only (server rooms, trading rooms, meeting rooms).
- Allocation is first-come-first-served; charges based on monthly meter readings.

Tenant Responsibilities

1. Install approved electromagnetic flow sensor and BTU meter linked to BMS.
2. Charges:
 - S\$1 per RT consumed (monthly).
 - S\$500 per drainage/charge-up occasion (subject to GST).
3. Flush installation at ≥1 m/s before connection.
 - Collect two water samples in presence of Landlord's representative.
 - Accredited lab analysis against Appendix B parameters.
4. Engage accredited water treatment specialist for passivation treatment.
5. Conduct final water sampling test with Landlord's representative before connection.
6. Enclose condensate drainpipes in metal trunking; terminate at AHU room floor trap.
7. Maintain chilled water return temperature ≥19°C.

Commissioning

- Air balancing to $\pm 10\%$ of design CFM for all registers.
- Certified air balancing report by QP required in Green Completion Pack.

7.4 FIRE PROTECTION

Purpose

Ensure tenant fire protection works comply with SCDF regulations and integrate safely with base building systems.

Design Criteria

- Systems must meet prevailing fire codes.
- Maintain minimum clearances and compatibility with base building alarm panels.

Mandatory Requirements

Approvals

- Obtain SCDF compliance documentation before commencement.
- Secure Landlord approval prior to works.

Contractor

Engage Nominated Base Contractor (Appendix A).

Sprinkler System

- Drainage fee: S\$500 per zone.
- Book via Tenant Portal ≥ 5 working days in advance.
- Recharge system same day; never leave uncharged overnight.

• Clearances

- Maintain ≥ 600 mm clear headroom below sprinkler deflectors.
- If partitions/furniture reduce clearance, Tenant must add sprinklers/detectors via Landlord's QP. – Full-height partitions must not extend to soffit of slab.

Alarm & Detection

- Additional devices must be compatible with building alarm panel.
- Connect to Fire Sub Alarm Panel, Mimic Panel, and Tenant repeater panel.
- Costs of integration borne by Tenant.
- Bells must be audible throughout Premises.
- Call points must be within effective range; Tenant to add devices if required.

Obstructions

- Fire hosereels, call points, alarm bells, extinguishers, risers, and escape stairways must remain unobstructed.

Maintenance

- Service fire extinguishers annually at Tenant's cost.
- Submit current maintenance certificates to Landlord.

Doors

Escape doors must not open outwards unless recessed and pre-approved.

Fire Cavity Barrier

- Barrier system under raised floor must not be tampered with.
- Penetrations require Landlord's QP certification.

Suppression Systems

- Clean agent systems require SCDF approval and Landlord consent.
- Commissioning must be in presence of Landlord's QP.
- Systems must be linked to DECAM monitoring.

Submission Requirements

Submit design drawings, SCDF compliance docs, and integration details to Landlord.

Commissioning & Verification

- Suppression systems commissioned in presence of Landlord's QP.
- Fire alarm and sprinkler systems tested jointly with Landlord.

Completion Requirements

Provide as-built drawings and annual maintenance certificates. • Systems must be fully recharged and operational before handover.

7.4A PUBLIC ADDRESS LIFE SAFETY SYSTEM

Purpose

Ensure emergency messages can be broadcast throughout tenant premises.

Design Criteria

- System must comply with Fire Safety Act and CP25.
- Tenant piped-in music must allow override by Landlord's system.

Mandatory Requirements

Coverage

Extend PA system to provide full coverage at Tenant's cost.

Integration

Install interface to connect piped-in music with Landlord's One-Way Voice Communication System.

Alterations

Installation/relocation/modification requires Landlord's QP engagement.

Testing

Arrange joint PA test with Landlord; ≥1 week advance notice.

Costs

Tenant bears all costs for verification, rectification, and submission of as-built drawings.

Submission Requirements

Submit design drawings and compliance documentation to Landlord.

Commissioning & Verification

Conduct joint PA test with Landlord.

Completion Requirements

Provide as-built drawings and verification records.

7.4B ENGINEERED SMOKE CONTROL SYSTEM (ESCS) — BASEMENT 1 KIOSK AND RETAIL

Purpose

Ensure smoke control systems remain effective and compliant in kiosk/retail tenancies.

Design Criteria

- Works must comply with Fire Safety Act, SCDF Regulations, and fire code.
- Shopfronts must remain open without bulkhead.

Mandatory Requirements

Ceiling Installations

Wiring, pipes, conduits, trunking must be non-combustible.

Smoke Detection

Existing ESCS detection must not be removed. – Relocation requires QP/FSE review.

Ceiling & Partitioning

- Solid island false ceilings require compliance review.
- Kiosk tenants must construct 350 mm solid false ceiling internally at +2.4 m height.
- Full-height sub-partitions require additional detectors.

Changes of Use

Amalgamation/division/change of tenancy requires SCDF submission.

Shutters

Security shutters must be ≥25% perforated.

Integration

- Additional smoke detection must be linked to ESCS panels at Fire Command Centre.
- Costs borne by Tenant.

Submission Requirements

Submit design drawings and SCDF compliance docs for review.

Commissioning & Verification

Test smoke detection and ESCS linkage in presence of Landlord's QP.

Completion Requirements

Provide as-built drawings and compliance certificates.

7.5 PLUMBING, SANITARY & WATERPROOFING

Purpose

- Ensure plumbing and sanitary works comply with NEA/PUB standards and prevent leakage.

Design Criteria

- Licensed Plumber design required.
- Water fittings minimum WELS 3-tick.

Mandatory Requirements

- Waterproofing
 - Wet areas: full waterproofing with 600 mm upturns.
 - 24-hour ponding test witnessed by Landlord.
 - Entrances: threshold at least 50 mm high.
 - Minimum 5-year warranty; certificate submitted.
- Leak Detection
 - System connected to automatic isolating valve and alarm.
 - Tenant must respond immediately to activations.
- Sanitary Pipes
 - Stainless steel drip trays required.
 - Fully enclosed, sloped, with leakage detector.
- Pipework
 - PUB-approved materials.
 - Properly supported by metal hangers.
 - Pressure-tested; results submitted to Building Management.
- Connections
 - Core area connections require Nominated Base Contractors.
 - No core-holes through structural elements permitted.

Submission Requirements

- Submit design drawings, warranty certificates, and test results to Landlord.

Commissioning and Verification

- Ponding test witnessed by Landlord.
- Pressure test results submitted.

Completion Requirements

- Provide as-built drawings and warranty certificates.

7.5A GAS SUPPLY

Purpose

- Ensure safe and compliant gas installations.

Design Criteria

- Designed by PE (Gas).
- Installed by licensed gas worker.

Mandatory Requirements

- Accessibility
 - Gas isolating valves must remain accessible to City Gas.
- Location
 - Valves located under finished floor level.
 - If ceiling lowered, relocate at least 100 mm below suspended ceiling at Tenant's cost.
- Safety
 - Automatic gas shut-off interlocked with kitchen exhaust hood mandatory.
- Submission Requirements
 - Submit design drawings and compliance certificates.
- Commissioning and Verification

- Gas installations tested and verified in presence of Landlord's representative.
- Completion Requirements
 - Provide as-built drawings and compliance certificates.

7.6 STRUCTURAL

Purpose

- Ensure tenant works do not compromise structural integrity.

Floor Loadings and Restrictions

Zone / Use	Allowable Loading
General office	4.5 kN/m ² (live load)
Compactus / high-density storage	8.5 kN/m ² — QP PE (Structural) certification required
Server rooms / UPS	Specific load assessment by PE (Structural) required
Kitchen / food preparation areas	Specific assessment required for heavy equipment

Mandatory Requirements

Works Restrictions

- No coring, drilling, or cutting without PE endorsement and Landlord consent.
- No attachment to curtain wall, glazing, or framing.
- All modifications require BCA submission and approval.

Expansion Joints

- Must remain uncovered.
- Wet areas prohibited over expansion joints.

Passageways

- Maintain 1.5 m clear passageway on both sides of core wall (Levels 2–9).

Composite Floor System

- PE review required for drilling/securing supports.
- Non-compliant works subject to Landlord inspection; costs borne by Tenant.

Knock-Out Panels (KOPs)

- Openings must be submitted for Landlord QP vetting.
- Approval subject to SCDF/BCA review.
- Multiple consecutive openings may not be approved.

Doors

- Escape doors recessed and pre-approved.
- Glass doors tempered and SCDF-compliant.
- Non-standard entrance doors require Landlord approval; reinstatement at lease expiry.

Thermal Films and Blinds

- Tinted thermal films prohibited.
- Blinds require Landlord approval (white/off-white only).

Signage and Display

- Illumination schedule: Mon–Fri 7am–11pm; Sat 7am–7pm; Sun/Public Holiday OFF.

Submission Requirements

- Submit structural drawings, load assessments, and BCA submissions.

Commissioning and Verification

- Landlord's QP to inspect non-compliant works.

Completion Requirements

- Provide as-built drawings.
- Reinstate entrance doors at lease expiry.

7.7 ELV, SECURITY & ICT

Purpose

- Ensure tenant ELV, security, and ICT systems integrate safely with building infrastructure.

Design Criteria

- Systems must comply with EMC requirements.
- ICT cabling minimum Cat6e.

Mandatory Requirements

- Access Control
 - Tenant systems must not affect building-wide access.
 - Integration requires Building Management approval.
- Card Compatibility
 - Legic Prime, Mifare Classic, Mifare DESFire only.
- CCTV
 - Tenant discretion within premises.
 - Common area/exits require Landlord consent.
- ICT Infrastructure
 - Fibre-ready risers available.
 - Patch panels/data closets must be dedicated, ventilated, lockable.
- Compliance
 - EMC compliance required for displays, LEDs, UPS.
 - Tenant systems must not connect to BMS, fire alarm, or access control without consent.
- Security Alarms
 - Concealed; not visible externally unless approved.

Submission Requirements

- Submit design drawings and integration requests.

Commissioning and Verification

- Systems tested jointly with Landlord.

Completion Requirements

- Provide as-built drawings and compliance certificates.

7.7A CABLE TELEVISION SYSTEM (CATV)

Purpose

- Provide tenants access to free-to-air channels via CATV.

Design Criteria

- One CATV point per floor provided.
- Additional points require splitters/boosters at Tenant's cost.

Mandatory Requirements

- Installation
 - Tenant may tap one CATV point per floor.
 - Additional points require Tenant installation.
- Design and Approval
 - Landlord's QP must review installation design.
 - Nominated Base Contractor may be appointed.
- Maintenance
 - Tenant responsible for integrity and maintenance.
 - Tenant subscribes to service providers at own cost.

Submission Requirements

- Submit design drawings for review.

Commissioning and Verification

- Installation tested jointly with Landlord.

Completion Requirements

- Provide as-built drawings.

7.8 KITCHEN & FOOD & BEVERAGE — EXHAUST SYSTEMS

Purpose

- Ensure kitchen exhaust systems meet safety and environmental standards.

Design Criteria

- Stainless steel hoods with grease filters.

- UV-C grease/odour removal with activated carbon post-filter.

Mandatory Requirements

- Fans
 - Maximum 65 dBA at 1.5 m.
 - Airfoil centrifugal or axial type.
 - Isolated with 50 mm spring-neoprene vibration isolators.
- Gas Equipment
 - PUB-approved installation.
 - PE (Gas) design.
 - Automatic shut-off interlocked with hood.
 - NEA compliance certificate required.
- Grease Trap
 - Must comply with NEA requirements.
 - Maintenance schedule submitted to Landlord.

Submission Requirements

- Submit design drawings and compliance certificates.

Commissioning and Verification

- Exhaust systems tested for noise and performance.

Completion Requirements

- Provide as-built drawings and maintenance schedule.

7.9 TENANT SYSTEMS — NETWORK INTERFACE & CYBER-SECURITY

Purpose

To protect the integrity, availability and security of the Building's networks and operational-technology systems (BMS, fire, access control, AMR metering) when tenant systems connect to, or exchange data with, them.

Mandatory Requirements

- No tenant system shall connect to the Building's BMS, fire alarm, access-control or metering network without the Landlord's prior written approval and a documented interface specification.
- Network segregation is mandatory: tenant corporate, tenant security/OT, and building OT networks must be logically separated. Public/guest networks must never share a segment with building OT.
- Any approved connection shall use the agreed protocol and points list only (e.g. BACnet/IP, Modbus, or the Building's published API), through a defined gateway — no direct device-level access to building controllers.
- Connected devices (sensors, controllers, displays, UPS, EV, IoT) shall be hardened: default credentials changed, unused ports/services disabled, firmware supportable and patchable, and vendor security-support status declared.
- The Tenant shall provide an asset inventory of any device connecting to building systems (make, model, firmware, function, network segment) at commissioning and keep it current.

- The Tenant shall notify the Building Management Office of any security incident affecting a connected system **within 24 hours** and cooperate on containment.
- EMC compliance applies to all display, LED, UPS and IoT installations to avoid interference with building systems (see 7.7).

Submission & Commissioning

- Detailed submission: network-segregation plan, points list, protocol, gateway design and device inventory (add to the BMS / Smart Building row of the 6.2 Drawing Submission Matrix).
- Completion: integration test record, confirmation of segregation, and Landlord cyber-security sign-off before any live connection to building OT.
- Data ownership, retention, access rights, cloud rules and the cybersecurity approval workflow are governed by Section 5.6 and Appendix AA; the completion sign-off above is issued under the AA.6 workflow.

KEY REFERENCES: IMDA / CSA guidance on OT and IoT security; the Building's published BMS interface specification (see Building Addendum); EMC requirements per 7.7. The Landlord may impose additional controls to protect Green Mark Intelligence-pillar systems and building operations.

7.10 SMART TENANT REQUIREMENTS — SMART BUILDING STANDARD

Purpose

This section sets the Smart Building Standard for tenant fit-outs. It ensures every tenant system that touches building infrastructure is interoperable, secure and analytics-ready, future-proofing the asset's digital operations. It is read together with Part 4.8 (Smart Building & BMS Integration) and Part 7.9 (Network Interface & Cyber-Security).

Mandatory Integration Standards

- Open protocols: tenant-installed plant and controls that interface with the base building shall communicate over BACnet/IP (preferred) or Modbus TCP/RTU. Proprietary or closed protocols require an approved gateway at the Tenant's cost.
- Open API policy: tenant systems exposing data to the Landlord (and vice versa under the Green Lease bilateral data protocol, Part 5.4) shall do so via documented, secure RESTful APIs; API documentation is a handover deliverable (Part 10.6).
- Cyber-security: all networked tenant devices comply with Part 7.9, including network segregation, hardening, patching and no direct internet exposure of OT devices.
- Automatic meter reading (AMR): all tenant electricity and water sub-meters shall be AMR-capable (M-Bus, Modbus or pulse with approved gateway) and integrated to the building metering platform per Appendix I.

Analytics and Sensing Provisions

- Occupancy analytics: fit-outs of 1,000 sqm or more shall provide anonymised occupancy sensing (people counting or utilisation sensors) at floor or zone level.
- Workplace sensors: temperature, RH and CO2 sensing per Part 4.7; PM2.5 and TVOC encouraged for wellness-certified projects.
- Indoor environmental dashboards: tenancies with sensing shall make live IEQ data viewable to occupants (tenant app, on-floor display or the Building dashboard, Part 11.10).

Full protocol schedules, point naming conventions, gateway requirements and data-sharing specifications are set out in Appendix T — Smart Building Integration Guide. Data ownership, retention, cybersecurity approval and validation are governed by Section 5.6 and Appendix AA; energy flexibility and AI-readiness provisions are in Section 7.12.

7.11 MISSION CRITICAL SPACES

Scope

This section applies to tenant server rooms and data suites, AI and high-performance computing infrastructure, trading floors, dealing rooms, network operations centres, disaster recovery suites, call centres, broadcast and media rooms, and laboratory-like high-load premises. These uses are subject to Stage 0 Feasibility Review (Part 2.3) before design commences.

Mandatory Requirements

- Cooling redundancy: dedicated cooling for mission critical loads sized to N+1 as a minimum; connection to base-building condenser water is subject to Stage 0 confirmation of capacity and to 24/7 availability terms in the Building Addendum.
- Heat rejection: supplementary heat rejection (including any roof or facade-mounted plant) requires Landlord approval, acoustic compliance with Appendix B.3 and structural verification by a PE.
- UPS and standby power: UPS installations require battery type declaration, FSSD-compliant battery room provisions, ventilation and hydrogen monitoring where applicable; generator connections are subject to Landlord approval and fuel-storage licensing.
- Harmonics: total harmonic distortion of current (THDi) at the point of common coupling shall not exceed the limits of IEEE 519 / SS 555; active filtering shall be provided where non-linear loads (UPS, drives, IT loads) would otherwise exceed them.
- Floor loading: rack and battery loads verified against structural capacity at Stage 0; spreader plates or strengthening designed by the Tenant's PE and approved by the Landlord's QP.
- Fire protection: clean-agent or pre-action systems in critical rooms interfaced to the building fire alarm per Part 7.4.
- Monitoring: critical plant alarms (cooling, UPS, leak detection, temperature) repeated to the BMS per Part 7.10 and Appendix T.

Detailed design criteria, redundancy classes and commissioning/IST requirements are set out in Appendix X — Mission Critical Facilities Standards.

7.12 ENERGY FLEXIBILITY, EV & AI-READY OPERATIONS

Purpose

Grid decarbonisation rewards buildings that can flex load, and AI-enabled operations reward buildings whose data and controls are ready. This section extends Part 7.10 so tenant installations are grid-interactive and analytics-ready from day one.

EV Charging Readiness

- Tenancies with allocated parking shall provide EV-ready provisions where works touch the car park: containment and spare DB capacity per the Building Addendum, OCPP-compliant chargers only, and dedicated AMR sub-metering per Appendix I.
- Load management: chargers join the Building's load-management scheme; uncontrolled charging on rising mains is not permitted.

Demand Response and Time-of-Use

- Tenants with flexible loads (thermal storage, EV charging, non-critical plant) may enrol them in demand-response events via the Green Lease; participation terms and benefit-sharing are recorded under 5.4.
- Sheddable and shiftable loads are identified at Stage 0 or commissioning and tagged in the BMS points list (Appendix T.4).
- Time-of-use energy analytics are provided on the tenancy dashboard (11.10) so consumption can be shifted to lower-carbon periods.

AI-Ready Metering, FDD and Predictive Maintenance

- Metering and controls expose data per the AA.1 schema at 15-minute (energy) and 5-minute (IEQ) resolution — the minimum for machine-learning baselining.
- Fault Detection & Diagnostics (FDD) readiness: tenant AHUs, FCUs and major plant expose the point set in Appendix T.4 sufficient for rule-based FDD (valve/damper positions, setpoints, statuses, alarms).
- Predictive maintenance: runtime hours and condition data for maintainable plant populate the COBie register fields in Appendix U, enabling condition-based maintenance during operation.

All connections remain subject to the cybersecurity approval workflow and OT/IT rules in Appendix AA.

PART 8

Construction Management

Site Setup · PTW · ESG Contractors · House Rules · Penalties

AT A GLANCE · PART 8 **Construction Management**

In this Part	Permit to work, ESG-qualified contractors, site establishment, protection and site rules.
Who acts	Main contractor, Building Management
Key forms & refs	Form RP/F1; Appendices A, C
Building-specific	Building site rules, hours, access and hoisting — see Part 14A and Appendix O.

8.1 Fitting-Out Works Procedure

The following procedure applies to all fitting-out, addition & alteration and reinstatement works at properties. Each step must be completed in sequence. No works may commence before a Permit to Work (PTW) has been approved.

STEP Day 0	1	Unit Handover / Notice of Possession (NOP)	NOP issued by Landlord. Tenant registers on the Tenant Portal. Fitting-out deposit and insurance are arranged. Tenant appoints fit-out contractor and QPs.
STEP Day +5	2	Kick-Off Meeting	Joint meeting: Building Management + Tenant + Fit-out Contractor. Design & fit-out briefing conducted. Drawings, forms and Sustainability Briefing Pack issued. Forms G1 and G2 introduced.
STEP Day +21	3	Concept Submission	Tenant submits fit-out concept drawings, documents, hoarding design, signage and shopfront design to Landlord. Tenant to obtain quotes from and engage Landlord's QPs directly at this stage.
STEP Following review	4	Landlord Review & Resubmission	Landlord review team issues comments. Tenant incorporates ALL comments and resubmits drawings with material sample board. All vetting comments from Landlord's QP must be addressed.
STEP Before works	5	Detailed Submission & PTW Application	Full drawings package submitted (Architectural, M&E, Fire, Structural, Sustainability). PTW application lodged via Tenant Portal with all required documents (see 8.2 below). Fitting-out deposit paid and confirmed.
STEP Before works	6	Pre-Commencement Condition Survey	Site Tenant conducts a site condition survey of all affected areas and submits the report to the Landlord within 5 working days of unit handover. Any unrecorded defects found after commencement will be deemed caused by the Tenant's works.
STEP Before works	7	Hoarding & Temporary Utilities	Erect floor-to-ceiling hoarding with approved vinyl graphics before any works commence. Tap temporary power supply from unit DB/Isolator and install temporary portable DB with RCCB/MCB protection. Lay temporary water pipe from unit water point if required. Book service lifts via Portal (7 WD notice).

STEP Day 0	1	Unit Handover / Notice of Possession (NOP)	NOP issued by Landlord. Tenant registers on the Tenant Portal. Fitting-out deposit and insurance are arranged. Tenant appoints fit-out contractor and QPs.
STEP During works	8	Fitting-Out Works — Construction Phase	All works conducted within approved PTW. House rules in 8.6 apply throughout. -EHS Rules for Vendors (Appendix C) mandatory. Air diffusers sealed; blanket filters on AHU/FCUs; daily housekeeping. Contractors to comply with all working hours restrictions.
STEP On completion	9	Testing, Commissioning & Green Completion Pack	All systems tested and commissioned per Part 9 schedule. Green Completion Pack submitted (final LPB, energy baseline, sub-meter records, materials register, waste report, IAQ evidence, as-builts). Joint PA test arranged with 1 week notice.
STEP On completion	10	Joint Inspection & Notification of Completion	Tenant notifies Landlord. Joint inspection arranged. Punchlist agreed. All rectification works completed within agreed timeframe. Inspection form (Form RP/F13) signed by both parties. Joint inspection held Monday–Friday, excluding public holidays, during Landlord's business hours.
STEP Post-inspection	11	As-Built Submissions & Deposit Refund	As-built drawings (PDF + AutoCAD), QP-endorsed approved plans, Authority approvals/FSC, air balancing report, LPB report and all handover documents submitted to Landlord within 2 weeks of commencing business. Deposit refunded after all clearances confirmed — see 8.2 for deposit refund conditions.
STEP Ongoing	12	Occupation & Green Lease Obligations	Tenant designates SLO (Form G2) within 30 days . Ongoing sustainability data sharing and annual Green Lease review per Part 11. Tenant Portal energy dashboard activated from Day 1 of occupation.

IMPORTANT: Fitting-out drawings must be submitted at least 21 working days before commencement of works. NO works may commence without an approved PTW. Any works carried out prior to Authority approval are at the Tenant's sole risk.

8.2 Permit to Work (PTW) — Mandatory Prerequisites

No fit-out or construction work of any kind may commence without a valid Permit to Work approved by the Building Management Office. PTW applications are submitted via the Tenant Portal or as directed by Building Management.

IMPORTANT: NO WORK WITHOUT AN APPROVED PTW. Breach will result in an immediate Stop Work Order, loss of the fitting-out deposit and debarment of the contractor from the Building.

PTW Submission Checklist

ALL of the following must be lodged and confirmed before PTW is approved:

- Form RP/F1 — Permit to Work (via **ALL of the following must be lodged and confirmed before PTW is approved:**
- Tenant Portal
-)
- Form RP/F2 — Risk Assessment Form
- Form RP/F3 — Contractor's Registration Form
- Workers' namelist (last 4 digits NRIC/WP; WP expiry dates)
- -EHS Rules for Vendors — signed acknowledgement (Appendix C)
- Form RP/F5 — Undertaking — Tenancy Fitting Out Works
- Form RP/F6 — Letter of Authorisation and Indemnity
- Fitting-out deposit (confirmed paid — see Building Addendum for payment details)
- Insurance cover note (per Schedule 8.3)
- Pre-condition site survey report
- Project schedule
- All endorsed project drawings (Architectural, Structural, ACMV, Fire, Electrical, Plumbing, ELV)
- Single Line Diagram endorsed by Building LEW ([Building LEW — see Building Addendum])
- Form G1 — Green Fit-Out Acknowledgement Form (Appendix D) — ALL tenants
- Form G2 — **Sustainability Liaison Officer** Designation Form (Appendix D) — ALL tenants
- Refrigerant declaration (if supplementary cooling is installed)
- Construction Waste Management Plan (if triggered by Obligation Matrix)
- Embodied Carbon Assessment and EPD register (if triggered)

8.3 Deposit Schedule

Tenancy Type	Tenancy Area	Deposit	Payable to
Retail / Kiosk	< 1,000 sq ft	S\$2,000	[Landlord legal entity — see Lease Agreement]
Retail / Kiosk	1,000– 2,000 sq ft	S\$3,000	[Landlord legal entity — see Lease Agreement]
Retail / Kiosk	> 2,000 sq ft	S\$5,000	[Landlord legal entity — see Lease Agreement]
Office	< 1,000 sq ft	S\$2,000	[Landlord legal entity — see Lease Agreement]
Office	1,000– 3,000 sq ft	S\$3,000	[Landlord legal entity — see Lease Agreement]
Office	> 3,000 sq ft	S\$1.00 per sq ft	[Landlord legal entity — see Lease Agreement]

Tenancy Type			Tenancy Area	Deposit	Payable to
Moving deposit (bulky items)			> 100 sq ft	S\$2,000	[Landlord legal entity — see Lease Agreement]

Payment details — bank account number, PayNow UEN and beneficiary name — are provided in the Building Addendum for your specific property. Submit proof of payment to the Building Management Office. Do not use payment details from any prior edition of this Manual without confirming they are current.

8.4 Temporary Utilities During Fit-Out

Temporary electricity and water supply may be tapped from the Landlord's supply during fitting-out works with prior written approval (Form RP/F4). The Tenant shall open a temporary utilities account with the Landlord's appointed agent and pay at the Landlord's pass-through rate.

- Temporary electricity: minimum charge S\$10 per day for tenants without a private meter. Tenant's contractor to install MCBs and RCCBs as protective devices when tapping from the Landlord's supply.
- Temporary water supply: S\$10 per day. Landlord reserves the right to revise rates in line with the service provider's prevailing rates.
- All costs for temporary utilities during the full fit-out period will be deducted from the fitting-out deposit if not paid directly.

8.5 Insurance Requirements

Tenancy	Min. Coverage	Scope
Retail / Kiosk	S\$2,000,000 per occurrence	All risks including Workmen's Compensation. [Landlord legal entity — see Lease Agreement] as joint insured.
Office — up to 5,000 sq ft	S\$2,000,000 per occurrence	All risks including Workmen's Compensation. [Landlord legal entity — see Lease Agreement] as joint insured.
Office — 5,001 to 10,000 sq ft	S\$3,000,000 per occurrence	All risks including Workmen's Compensation. [Landlord legal entity — see Lease Agreement] as joint insured.
Office — 10,001 sq ft and above	S\$5,000,000 per occurrence	All risks including Workmen's Compensation. [Landlord legal entity — see Lease Agreement] as joint insured.

8.6 ESG-Qualified Contractors

's commitment to sustainable and green procurement extends to all fit-out contractors across its portfolio. Contractors with the following qualifications will have preferential consideration for Landlord nominations:

- bizSAFE Level 3 and above (mandatory for major A&A fit-out works)
- ISO 14001 Environmental Management certification
- ISO 45001 Occupational Health and Safety certification
- BCA Green and Gracious Builder Award (any star rating)
- Use of eco-friendly, recycled or low-carbon materials, equipment and products

Contractors are scored and tiered (Platinum / Gold / Silver) under the Contractor Sustainability Scorecard in Appendix AC; scores inform nominated lists (Appendix A), carry weight in -run evaluations, and feed Scope 3 reporting (4.3.3).

8.7 Site Rules

8.7.1 Site Establishment

- Pre-condition site survey **within 5 working days** of unit handover. Submit to Landlord. Unrecorded defects found after commencement deemed caused by Tenant's works.
- Floor-to-ceiling hoarding before commencement. Material: white laminated plywood or seamless gypsum board. Outward-facing surface: vinyl graphics approved by Landlord.
- Lift lobby, corridor and building finishes protection: polyurethane sheet + minimum 3 mm plywood. Mandatory before any materials movement.
- Curtain wall: cover and protect from dust, weld splatter, paint and corrosives. No cutting, drilling, coring or attachment.

8.7.2 Working Hours

General fitting-out works: Monday–Friday 10:00 PM–6:00 AM; Saturday 10:00 PM–9:00 AM. Sunday and Public Holidays: only by written agreement with Building Management Office.

Heavy drilling, knocking, spray painting, use of adhesives or varnishing (where approved): 12:00 AM–5:00 AM only, or during such hours as permitted in writing by the Landlord.

Minor works without nuisance may be conducted during office hours by written agreement with the Building Management Office. Hot-tapping works to ACMV system: Monday–Sunday after 8:00 PM; 5 clear working days' advance notice required (Form RP/F9).

8.7.3 Access, Security and Lifts

- Register at security guard post before commencing. Display Contractor Access Pass at all times. Damaged/lost pass: S\$20 per pass; failure to return pass: S\$30 per pass.
- Service lifts only for all materials, debris and furniture. Passenger lifts: strictly prohibited for construction use.
- Book service lifts at least 7 working days in advance via Tenant Portal. Fee: S\$20 per 30-minute slot (maximum 2 consecutive slots = 60 minutes per booking; minimum 4 hours between bookings). Missed or late timeslots are forfeited without refund.
- Deliveries outside peak hours: avoid 8:00–9:30 AM; 11:30 AM–2:30 PM; 4:30–6:30 PM.
- All vehicles accessing the loading/unloading bay: maximum vehicle height 3 m. Wheel clamp enforced on vehicles parked indiscriminately.
- All materials kept within the Premises. No obstruction of common areas, escape routes or emergency equipment.
- No eating, sleeping or resting in common areas of the building.

8.7.4 Waste and Housekeeping

- All waste and debris removed daily or as directed by Building Management.
- Overnight bin parking: Form RP/F10. Fee: S\$54 (incl. GST) per bin per night. Parking permitted only from 10:00 PM to 4:00 AM. Bin must be removed by 4:00 AM. The Tenant's Appointed Contractor must deploy traffic marshals for the bin vehicle's access and exit from the loading bay; the Landlord's security team may deny entry or exit if no marshals are present.
- Segregated waste streams on-site: timber; metal; concrete; gypsum; plastics; cardboard; e-waste; hazardous waste; general refuse.
- All furniture other than fixtures must be pre-fabricated and painted off-site. All paints, glue and sealants used on-site must be odourless or low-odour. Any solvent that may cause annoyance to other occupants requires Landlord approval before use.
- All circular saws and similar particle-generating equipment must be equipped with vacuum-type dust collectors.
- Construction waste manifest: per Construction Waste Management Plan (Obligation Matrix).

8.7.5 Hot Works

- Hot Works Permit (Form RP/F9) required for all welding, cutting, grinding and flame works.
- Fire extinguisher (minimum 4.5 kg CO₂) within 3 m of all hot works at all times.
- No hot works in confined spaces without approved confined space safety assessor.
- Minimum 30-minute fire watch after all hot works are completed.

8.8 Penalties Schedule

Type of Breach	First Occasion	Subsequent
Fire alarm activation — contractor negligence	S\$500	S\$1,000
Electrical tripping/shutdown without approval; BAS system taken offline	S\$500	S\$1,000
Lift breakdown — contractor mishandling	S\$500	S\$1,000
Failure to register for Security Pass	S\$100 per worker	—
Failure to display Security Pass	S\$100 per occasion	—
Failure to return Security Pass	S\$30 per pass	—
Failure to use designated toilet	S\$200 per occasion	—
Failure to use designated service lifts	S\$200	S\$300
Working during restricted hours; noise; smell nuisance	S\$200	—
Failure to remove bulky debris from Premises	S\$900 per trip	—
Failure to dispose of rubbish at designated area	S\$200	S\$300
Chokage or damage to refuse / drainage system	Min. S\$500 + repair costs	—
Causing flood or water ponding to adjacent tenants	S\$500 + damage liability	—
Failure to comply with Landlord instructions	S\$500	—
Safety non-compliance (WSH Act)	S\$500 + Stop Work Order	—
Failure to provide floor/wall/lift lobby protection	S\$500 + repair costs	—
Eating or sleeping inside unit or common areas	S\$200 per worker per occasion	—
Failure to carry out housekeeping; common areas not kept clear	S\$200 per occasion	—
Vehicle exceeding 3 m height accessing loading bay	S\$200 + repair costs	—

Type of Breach	First Occasion	Subsequent
Nuisance (dirtied lobby/washroom/cigarette butts/persistent non-compliance)	S\$350 per incident	—
Smoking in non-designated areas	S\$100 per worker	—
Employment of illegal worker or worker without valid work permit	Police report filed	—

PART 9

Testing & Commissioning

T&C Matrix · Witnessed Tests · Green Completion Pack · Commissioning Schedule

AT A GLANCE · PART 9 **Testing & Commissioning**

In this Part	T&C principles, master schedule, witnessing and system tie-ins.
Who acts	QP, PE, contractors, Building Management
Key forms & refs	Form Cx/F-series; Appendix B
Building-specific	Building base-system tie-in points and witnessing — see Part 14A and Appendix O.

9.1 T&C Principles

All systems shall be tested and commissioned before the joint inspection. Testing shall follow the manufacturer's instructions and applicable Singapore standards. Landlord-witnessed tests shall be arranged with a minimum of 5 working days notice via the **9.1 T&C Principles**

Tenant Portal**9.1 T&C Principles**

T&C Master Schedule

System	Test Type	Standard	Landlord Witnessed	Documentation
Electrical installation	Insulation resistance; polarity; earth continuity; RCD trip time	CP5; SS 551	No (QP certified)	Test certificates
Sub-metering (AMR)	Initial reading confirmation; AMR connectivity test; accuracy check	Supplier spec	Yes	Commissioning record
Lighting	Illuminance survey (lux); LPB calculation verification	EN 12464-1; SS 530:2024	No	Certified LPB report
ACMV air balancing	Air volume measurement ($\pm 10\%$ of design CFM)	ASHRAE / SMACNA	Yes	Certified air balancing report
Chilled water quality	Water chemistry analysis against Appendix B parameters	specification	No (lab report)	Water quality report
Fire sprinklers	Alarm check valve; flow test; head distribution check	SCDF; SS CP52	Yes	SCDF acceptance
Fire alarm	Full point-to-point test; cause and effect; strobe / sounder levels	SCDF; SS 550	Yes	SCDF acceptance
Waterproofing (wet areas)	24-hour ponding test; visual inspection of upturns	specification	Yes	Ponding test record
Drainage	Flood test; gradient check; trap seal verification	SS CP48	No	QP sign-off
BMS integration	Point-by-point verification; sensor reading accuracy; alarm routing	BMS spec	Yes	BMS commissioning report

System	Test Type	Standard	Landlord Witnessed	Documentation
IAQ baseline	CO ₂ ; TVOC; formaldehyde; PM2.5; PM10; CO; CO ₂	NEA/BCA standards	No (accredited lab)	Lab report
Suppression systems	Functional test; cylinder weight; discharge path check	SCDF	Yes	SCDF acceptance

9.2 Green Completion Pack

The Green Completion Pack shall be submitted to the Building Management Office at or before the joint inspection. It is a condition of deposit release.

- Final LPB calculation certified by QP — demonstrating compliance with SS 530:2024 and building LPB of 5.0 W/m²
- Energy baseline: estimated annual electricity by use (lighting, ACMV, plug load, server room) in kWh per year
- Sub-metering schedule: meter IDs, locations, CT ratios, AMR compatibility, commissioning records, initial readings
- Materials register: principal materials with certification details (SGBP, FSC, EPD, SGLS, recycled content percentage)
- Embodied carbon assessment (where applicable): **SBCC/BECC** tool output summary PDF
- Construction waste report: weight by stream (kg), diversion rate (%), licensed disposal facility records
- Refrigerant commissioning declaration: type, charge (kg), GWP, equipment model, leak test result
- IAQ testing: planned test date (or completed results), laboratory name; results submitted **within 30 days** of testing
- BIM as-built models in IFC format at LOD 300 (where triggered — see Obligation Matrix)
- As-built drawings (PDF + AutoCAD): all disciplines; QP-endorsed
- Air balancing report (certified by QP)
- Waterproofing ponding test records
- O&M Manuals: all installed equipment; electronic format on Tenant Portal
- Warranty certificates: all installed systems and equipment

IMPORTANT: Green Completion Pack is a MANDATORY condition of deposit release. Incomplete packs will delay deposit return. All items must be submitted; any items not yet available (e.g. IAQ results) must be noted with a confirmed submission date.

PART 10

Handover & Occupation

Practical Completion · Defects · Punchlist · Digital Handover · Deposit Release

AT A GLANCE · PART 10 **Handover & Occupation**

In this Part	Completion, Green Completion Pack, digital twin & handover, deposit refund and operational readiness.
Who acts	Tenant, QP, Building Management
Key forms & refs	Forms HO/F-series; Appendix U
Building-specific	Building handover requirements and O&M formats — see Part 14A and Appendix O.

10.1 Joint Inspection

Upon notification of completion, the Building Management Office will arrange a joint inspection **10.1 Joint Inspection**

within 5 working days **10.1 Joint Inspection**

. The joint inspection covers:

- Physical walkthrough of all areas against approved drawings
- Verification of Green Completion Pack completeness
- BMS system walkthrough and AMR meter confirmation
- Punchlist preparation — all defects and outstanding items recorded
- Confirmation that all as-built drawings, manuals and warranties are submitted
- Testing of the public address system
- Testing and commissioning of any auxiliary air-conditioning system
- Testing of BTU meters for tapping of chilled/condensed water (where installed)
- Testing of plumbing and sanitary system
- Confirmation that all waste and debris is removed

NOTE: Tenants with automatic sliding doors must provide the latest servicing reports for floor traps and the sliding door before the handover date, and must engage the building's nominated sliding door vendor for a servicing agreement. Contact Building Management Office for the current vendor details.

10.2 Defects and Punchlist

Outstanding items from the joint inspection shall be agreed in a Punchlist. The Tenant shall clear all Punchlist items within 14 calendar days unless an extended period is agreed in writing. Major defects (structural, waterproofing, fire) must be cleared before occupation.

10.3 Occupation Permit

The Tenant is responsible for obtaining all Authority approvals for occupation including the Occupation Permit (OP) or Temporary Occupation Permit (TOP) from BCA. The Landlord's joint inspection clearance does not constitute Authority approval for occupation.

10.4 Digital Handover Package

operates a digital-first asset information approach. The following shall be submitted to the Tenant Portal at handover:

- BIM as-built models in IFC format at LOD 300 (where triggered)
- O&M Manuals for all installed plant and equipment: PDF format, uploaded to Tenant Portal
- Sub-metering register: meter IDs, locations, channels, AMR node IDs, initial reading dates
- Equipment Asset Register: manufacturer, model, serial number, installation date, warranty expiry
- Warranty certificates for all installed systems
- Authority approval documents (OP, TOP, BCA, SCDF, PUB certificates)

10.5 Deposit Release

The fitting-out deposit will be returned after all of the following are confirmed:

- Joint inspection completed and Punchlist cleared
- Green Completion Pack submitted and accepted
- As-built drawings and BIM submitted
- O&M Manuals and equipment register submitted
- No outstanding penalties or deductions

- Authority clearances (OP/TOP) obtained and copies submitted to Landlord
- Sub-metering commissioning confirmed by Building Management

10.6 DIGITAL TWIN & DIGITAL HANDOVER

Purpose

is progressively building digital twins of its managed assets. Beyond the BIM IFC (LOD 300) model already required under Part 10.4, major fit-outs shall deliver a structured digital asset dataset so that tenant works are captured in the Building's digital twin and future facilities management systems.

Required Deliverables (Major Fit-Outs)

- BIM IFC model — as-built, LOD 300 minimum, georeferenced to the building grid.
- Asset tagging — all maintainable assets tagged per the asset naming convention (Appendix U).
- QR-coded equipment — durable QR labels on all maintainable plant, linked to the asset register entry.
- COBie asset register — COBie 2.4 spreadsheet or IFC-embedded COBie covering type, serial, warranty, supplier, spare and maintenance data.
- Digital O&M handover — O&M manuals, warranties, T&C records and statutory certificates uploaded to the Tenant Portal in the folder structure of Appendix U; paper-only handover is not accepted.

Format specifications, field mappings and quality-check rules are set out in Appendix U — Digital Handover Standards (BIM/COBie). Deposit release under Part 10.5 is conditional on acceptance of the digital handover package.

10.7 OPERATIONAL READINESS PLAN

Purpose

Completion of construction is not the same as readiness to occupy. For fit-outs of 1,000 sqm or more (and encouraged for all others), the Tenant shall submit an Operational Readiness Plan and complete the activities below before occupation, reducing post-occupancy defects, complaints and energy drift.

Pre-Occupation Activities

- FM training — the Tenant's FM team and the Building Management team briefed on all tenant systems, including BMS points, isolation points and abnormal-operation procedures.
- Emergency drills — evacuation routes, warden appointments and first-response procedures rehearsed with Building Management before staff move in.
- Asset register verification — joint verification that the COBie register and QR tags (Part 10.6) match installed assets.
- Maintenance schedule upload — the planned preventive maintenance schedule for tenant plant uploaded to the Tenant Portal.
- Energy baseline confirmation — sub-meter readings witnessed and recorded as the tenancy's energy and water baseline for Green Lease reporting (Parts 5 and 11.6).
- Defects strategy — an agreed defects-liability process: single point of contact, response times, access arrangements and the punchlist close-out programme (Part 10.2).
- Cleaning and waste arrangements — cleaning regime, bin-centre access and recycling streams agreed with Building Management (Part 11.4).
- IAQ readiness — post-fit-out IAQ results (4.7.3) reviewed and any remediation closed before occupation.
- BMS trend-log verification — tenant points trending correctly per the T.4 points list; alarms tested end-to-end (Appendix AA.6).
- Maintenance contractor appointment — term maintenance contractors for tenant plant appointed and registered per Appendix C.

- Emergency contacts — tenant 24/7 emergency contacts and warden appointments lodged and verified in the Tenant Portal.

NOTE: The Occupation Permit (Part 10.3) will not be issued for qualifying projects until the Operational Readiness Plan is accepted by Building Management.

Operational Requirements

Energy · Water · Waste · Reporting · Tenant Alterations · Audits

AT A GLANCE · PART 11 **Operational Requirements**

In this Part	In-use obligations, awards programme, performance dashboards and climate resilience & business continuity.
Who acts	Tenant, Building Management
Key forms & refs	Appendices V, Y, Z
Building-specific	Building dashboard access, resilience thresholds and BCP — see Part 14A and Appendix O.

11.1 Introduction

Sustainability does not end at handover. This Part sets out the Tenant's ongoing environmental obligations during the lease term. The objectives are to maintain the Building's Green Mark performance, support 's portfolio ESG reporting and enable tenants to meet their own SGX/ISSB obligations.

: and the Tenant are sustainability partners for the full term of the lease. Where both parties fulfil their commitments, the Building achieves lower carbon intensity, lower operating costs and a stronger ESG profile — supporting asset value and lease competitiveness for all occupiers.

11.2 Energy Conservation

- Optimise the use of natural daylight and use efficient light fittings which use less energy and last longer.
- Any re-lamping done in future must be consistent with the approved lighting design and the green design guidelines.
- Switch off lights, air-conditioning and computer equipment when not in use.
- Set and maintain room temperature at 24°C and above. Each degree lower increases energy use by 3–4%.
- Keep doors closed when air-conditioning is in operation. Use only fan when doors are open.
- Do not place heating appliances that will hinder the performance of the air-conditioning thermostat.
- Carry out regular maintenance of air-conditioning (if any), equipment and appliances to maintain optimal efficiency.
- Procure Energy Star or NEA Energy Label appliances and equipment — at least 10% to 50% more efficient than conventional models.
- Monitor electricity consumption via the Tenant Portal. Investigate any spike in usage and rectify wastage.
- Set energy improvement targets and policy for continual improvement.
- Set, monitor and report an annual energy intensity target of 75 Kilowatt hours per square meter per year (kWh/m²/yr) based on a 55-hour week and maintain an average equipment plug load of 16 W/m² unless a stricter Building Addendum target applies.
- Maintain occupancy-based lighting and ACMV controls, demand control sequences and dedicated thermostats; investigate and rectify avoidable after-hours or non-use energy consumption.

11.3 Water Conservation

- Track and monitor water usage via the Tenant Portal or private water meters at least monthly. Investigate any spike in usage and rectify wastage.
- Carry out regular mopping of floors instead of flushing or washing with a water hose.
- Stop dripping taps immediately — a fast-dripping tap can waste up to 200 litres of water a day.
- Report immediately any water leakage or abnormalities such as wet cabinets, floors or wall coverings to Building Management.
- All replacement fittings shall comply with WELS minimum 3-tick.
- Display water conservation posters at water usage areas within the Premises and maintain private water meters for major water uses such as pantries, kitchens, toilets and washing areas where applicable.
- Set a water improvement plan and policy for continual improvement.

11.4 Waste and Resource Management

Purchasing and Management of Goods

- Work with suppliers to deliver goods without or with less disposable packaging.
- Purchase products with recycled content and less packaging material.
- Purchase reusables instead of single-use items wherever possible.

Facilities and Operations

- Provide reusable items for staff use (e.g. reusable crockery, cutlery at pantries, reusable bags, water dispensers/jugs and reusable cups in meeting rooms).
- Go digital (e.g. online portals, sharing platforms, online repository) to reduce paper consumption.
- Provide recycling bins within the Premises for staff to recycle paper/cardboard, plastic, glass and metal.
- Recycle all printer consumables, toner cartridges and obsolete IT equipment through licensed e-waste collectors.
- Set a Waste Management Policy and Recycling Plan for continual improvement.
- Participate in the Building Management 3R (reduce, reuse, recycle) programme and any waste management/3R training or education organised by Building Management.
- Cooperate with annual waste audits. The waste audit methodology includes: (i) creating an audit checklist for all waste types generated from each tenant premises, (ii) collecting waste samples from tenant premises, (iii) sorting waste into different types according to the checklist, and (iv) weighing waste types, recording data and analysing results to identify waste reduction and recycling opportunities.
- Comply with NEA requirements for food waste segregation and licensed collection.

Other Ways to Conserve the Environment

- Carpool where possible — it cuts the cost of commuting and reduces vehicle emissions.
- Use alternative public transportation.
- Set a sustainable and environmentally friendly procurement and purchasing policy for office stationery, janitorial paper products and cleaning products.
- Cleaning contractors engaged by the Tenant should use cleaning products certified to at least SGBP 2 ticks or equivalent where available.
- Use NEA-registered pesticides and vector control products suitable for indoor use.

11.5 Workplace Health and Wellbeing

- Appoint a Green & Health Ambassador within the office to lead energy improvement plans and health promotional activities.
- Participate in the Building Management Post Occupancy Evaluation (POE) survey once every 3 years and take corrective actions accordingly where applicable. Tenants are encouraged to conduct a yearly internal POE to assess employees' satisfaction with the indoor environment and follow up corrective actions promptly.
- Provide training and education of employees on basic ergonomics and safety knowledge.
- Put up greenery and biophilic features (such as planters, images and colours of nature, naturalistic shapes and forms) to improve the physical and mental well-being of occupants.

11.6 Mandatory Annual Sustainability Reporting

By measuring and reporting performance, the Landlord and Tenant can improve operational outcomes and maintain the Green Mark and ESG performance of the Building. The Tenant shall share with the Landlord the relevant data in the format and frequency required:

- Electricity consumption (monthly via AMR or Portal; annually **by 31 January**)
- Water consumption (monthly via Portal; annually **by 31 January**)
- Waste recycling volumes (quarterly)
- Refrigerant inventory: type, charge (kg), GWP; any top-ups in the prior year (annually **by 31 January**)
- Diesel or gas fuel consumption — Scope 1 (annually **by 31 January**)
- Maintenance and inventory list of equipment used in the Premises
- Estimated headcount / occupancy intensity (FTE) for energy intensity benchmarking (annually)
- Estimated recycling volumes by stream (quarterly data aggregated annually)

The Tenant shall cooperate with Green Mark audits, energy audits, meter verification, IAQ audits, Green Lease reviews and reasonable sustainability verification exercises upon reasonable notice. The Landlord may

request access to relevant meters, records and equipment rooms subject to security and operational requirements. The Tenant shall participate in any waste management, recycling, Green Lease, energy performance, carbon reporting or sustainability training and engagement organised by Building Management.

11.7 Tenant Alterations During Lease

Any addition, alteration or installation to the Premises during the lease term (including replacement of M&E equipment, partitions, ceilings or flooring) requires prior written consent from the Landlord. Apply via the Tenant Portal. Minor works (cosmetic, furniture, no M&E changes) may be notified rather than approved where below S\$5,000 cost.

- All alterations subject to the same design, submission and technical standards as the original fit-out.
- Updated as-built drawings to be submitted **within 4 weeks** of completion of any alterations.
- Sub-metering changes must be notified to Building Management within 5 working days.
- Any change to refrigerant type, charge or equipment must be updated in the annual refrigerant inventory.

11.8 Post-Occupancy Evaluation (POE)

All tenants shall participate in a Building Management Post Occupancy Evaluation (POE) survey once every 3 years and take corrective actions accordingly where applicable. also recommends tenants conduct an internal POE within 6–12 months of occupation and at least every 3 years thereafter. A POE typically covers energy performance vs. baseline; IEQ (thermal comfort, acoustics, IAQ, lighting); occupant satisfaction and wellbeing; water and waste performance.

Share POE results with . will use aggregated building-level data to improve the Building's systems and identify opportunities for joint energy and carbon reduction.

11.9 DESIGN & SUSTAINABILITY AWARDS PROGRAMME

Purpose

The Green Lease (Part 5) sets bilateral commitments; the Green Tenant Recognition Programme celebrates tenants who exceed them. The Programme comprises (a) Green Tenant Recognition tiers — Platinum, Gold and Silver, plus a Most Improved Tenant award — issued annually on measured in-use performance, and (b) seven annual Award Categories spanning design, sustainability, circularity, retail, experience, wellness and innovation, governed by Appendix AD.

Assessment Metrics

Metric	Measure	Source
Energy intensity	kWh/sqm/year vs building benchmark and prior year	AMR sub-meters (Appendix I)
Waste diversion	% of tenancy waste diverted from incineration/landfill	Waste reporting (Part 11.4)
Indoor air quality	Compliance with IAQ parameters in occupied hours	IEQ sensors / annual IAQ test (Part 4.7)
Green Mark Interiors	GMI certification achieved and maintained	BCA certificate (Part 4.4)
Wellness initiatives	Programmes, certifications and engagement activities	Annual sustainability report (Part 11.6)
Embodied carbon	Fit-out intensity vs the 4.10 limit and best-practice target	Appendix G register (Part 4.10)

Recognition

- Recognition tiers are confirmed at the Annual Green Lease Performance Review (Part 5.5); Award Category winners and high commendations are announced at the annual tenant event per Appendix AD.
- Platinum and Gold tenants are featured in sustainability communications and are eligible for priority consideration in lease-renewal sustainability incentives, where offered.

Scoring bands, evidence requirements and the reporting calendar are set out in Appendix V — Tenant ESG Reporting Guide.

11.10 BUILDING PERFORMANCE DASHBOARDS

Purpose

To make the Green Lease live rather than contractual, provides each tenancy with a performance dashboard within the Tenant Portal. The dashboard turns metering and sensing data into feedback tenants can act on monthly, not annually.

Dashboard Content

- Energy usage — monthly and cumulative kWh from AMR sub-meters, normalised by area.
- Water usage — monthly consumption from private sub-meters (Part 4.6.2).
- Waste — tonnage and diversion rate from building waste records (Part 11.4).
- Indoor air quality — live and trended IEQ readings where sensing is installed (Part 7.10).
- Carbon footprint — Scope 2 emissions computed from metered electricity using prevailing grid emission factors, plus reported Scope 1 and 3 items (Part 4.3).
- Benchmarking — each metric shown against the building average and, where available, the portfolio average for the same use class.
- Time-of-use analytics — consumption by tariff period and grid-carbon intensity, supporting load shifting (7.12).
- Utilisation insights — where **occupancy analytics** are installed (7.10): zone utilisation against the 3.9 reference ranges, plus anonymised portfolio insights published annually.

Dashboard data flows both ways under the bilateral data sharing protocol (Part 5.4). Data specifications and governance are in Appendices T and AA; annual reporting obligations remain per Part 11.6 and Appendix V.

11.11 CLIMATE RESILIENCE & BUSINESS CONTINUITY

Purpose

Long-term asset value depends on how tenancies perform in a hotter, more volatile climate. This section sets resilience expectations for tenants and records what discloses and provides in return.

Requirements and Disclosures

- Heat resilience — cooling designs for major fit-outs are checked at Stage 0 against current (not historical) Singapore weather files; solar-exposed frontages incorporate shading or glazing performance per Part 3; after-hours setpoint strategies are agreed at Operational Readiness (10.7).
- Flood-risk disclosure — the Stage 0 Feasibility Statement (2.3) discloses known building flood exposure; tenants locate critical equipment, servers and archives above disclosed risk levels, and basement tenancies follow the Building Addendum on flood barriers and leak detection.
- Refrigerant transition — beyond the **GWP ≤ 750** cap (4.3.1), new tenant plant should have an identified pathway to GWP ≤ 150 alternatives at end of life; refrigerant leak detection is required in plant rooms and mission critical spaces (7.11).

- Business continuity — tenants operating mission critical spaces (7.11) lodge a business continuity summary (recovery priorities, 24/7 contacts) with Building Management; all tenants keep emergency contacts current (10.7).
- Building-wide events — during utility interruptions, extreme weather or building emergencies, communicates via the Tenant Portal and warden network, restores services on a published priority basis (life safety, vertical transport, cooling to critical loads, general services), and holds a joint after-action review for events exceeding four hours.
- Portfolio framework — resilience scoring, investment prioritisation and adaptation roadmaps sit in Part 26 of the companion Asset Performance Platform Standard; this section remains the tenant-facing standard.

Reinstatement Guide

Circular Design Plan · Waste Diversion · Material Reuse · Final Inspection · Deposit Release

AT A GLANCE · PART 12 **Reinstatement Guide**

In this Part	End-of-lease reinstatement obligations, process and standards.
Who acts	Tenant, contractor, Building Management
Key forms & refs	Form RE/F-series
Building-specific	Building reinstatement scope and make-good baseline — see Part 14A and Appendix O.

12.1 End-of-Lease Reinstatement Philosophy

views lease-end reinstatement as an opportunity for circular economy leadership — not merely a contractual obligation. A well-planned reinstatement can divert >


Philosophy

12.1 End-of-Lease Reinstatement Philosophy

of materials from landfill, reduce Scope 3 emissions for both Tenant and , and create value for charitable organisations and secondary material markets.

Tenants are encouraged to notify of upcoming lease expiry at least 12 months in advance to allow a collaborative reinstatement planning process.

12.2 7-Stage Reinstatement Process

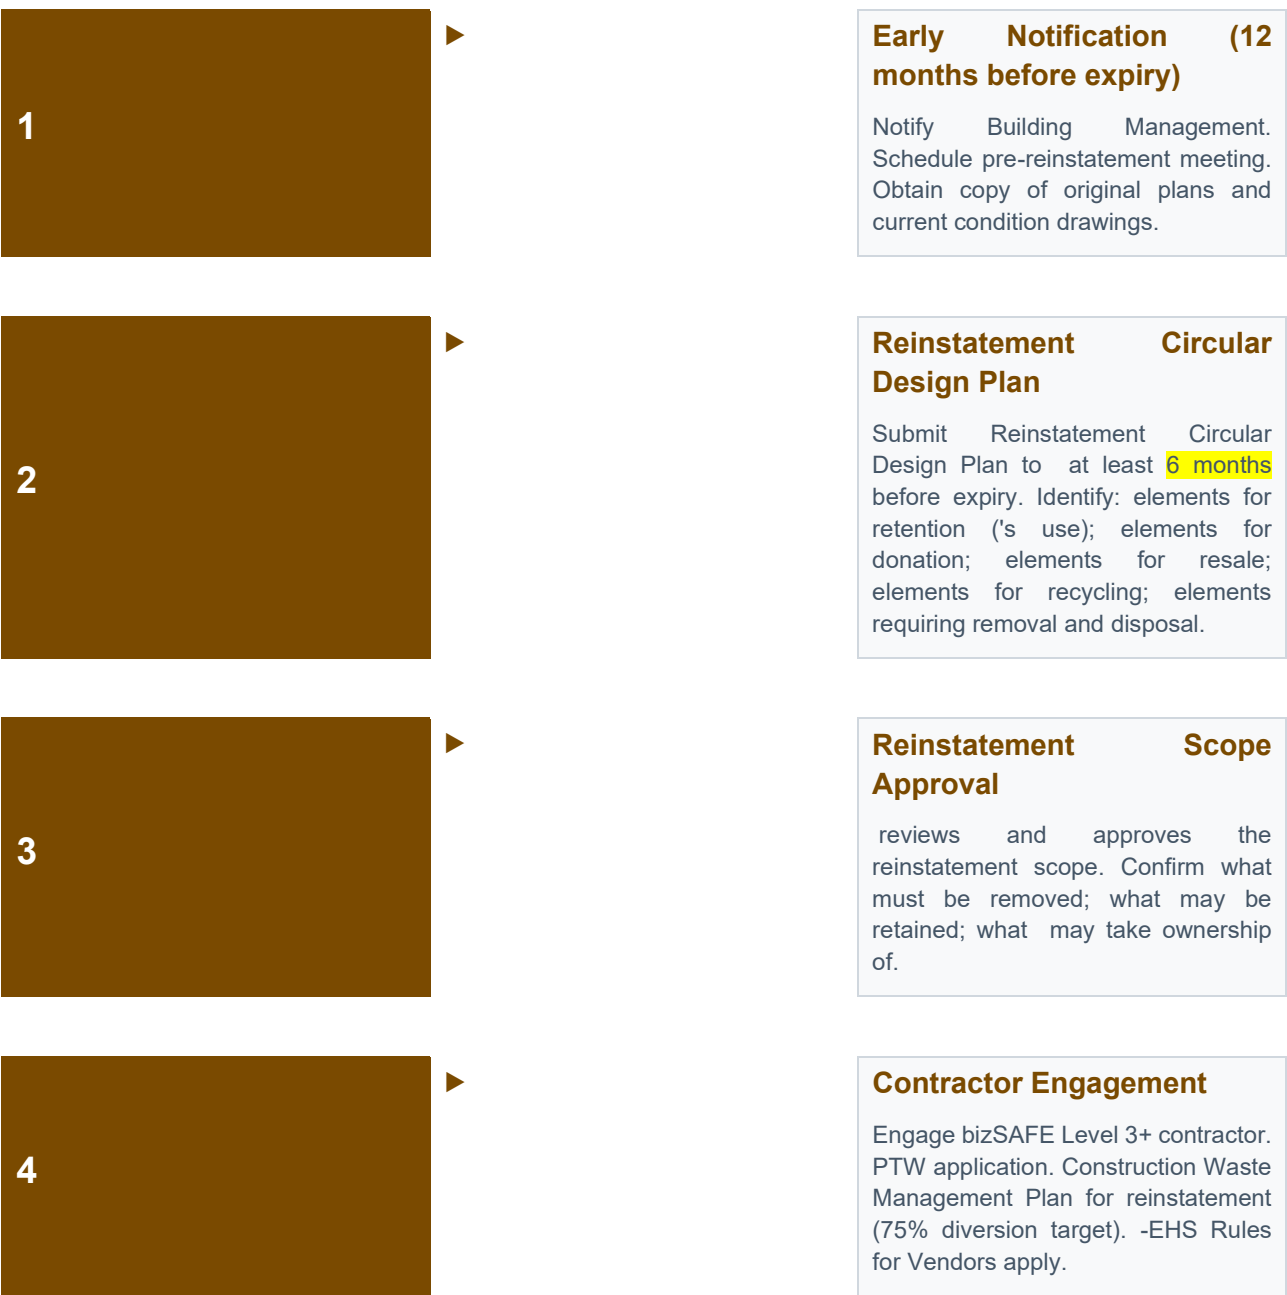

5

Reinstatement Works

All reinstatement works during permitted hours. Segregated waste streams. Waste manifests maintained. Donated items: record of recipient organisations.

6

Final Inspection

Joint inspection with Building Management. Punchlist for any deficiencies. Unit to be returned in condition specified in Lease Agreement.

7

Documentation and Deposit Release

Submit: reinstatement waste manifests; recycling/donation records; final as-built drawings (if any changes); reinstatement QP certificates. Deposit released after all clearances.

12.3 Environmental Obligations at Reinstatement

- Target minimum **60%** construction and demolition waste diversion from landfill.
- Submit waste manifests (weight by stream, licensed disposal facility) to **within 30 days** of completion of reinstatement works.
- Refrigerant: decommission and recover refrigerant in accordance with NEA requirements. Provide recovery certificate.
- Hazardous materials: asbestos, lead paint or other hazardous materials found during strip-out to be managed per NEA Regulations. Notify immediately upon discovery.
- Clean demolition: all floor finishes, ceiling tiles, partitions, raised floor panels and fittings removed to original base building condition unless agreed otherwise.

12.4 Circular Economy Opportunities

actively supports circular economy reinstatement. The following channels are available to tenants:

- Furniture and equipment donation: maintains a list of approved charity partners and community organisations that accept office furniture donations.
- Secondary market: good-quality workstations, chairs, storage and meeting furniture can be listed on 's internal secondary market platform (Tenant Portal).
- Building reuse: may elect to retain selected elements (raised floor panels, ceiling tiles, certain partitions) at no cost to the Tenant in lieu of disposal. Agreement at the Reinstatement Scope Approval stage.
- Material salvage: certified contractors can salvage copper cabling, aluminium framing and steel for recycling. Ensure licensed facility records are maintained.

12.5 Legal Framework

- The Tenant's reinstatement obligations are governed by the Lease Agreement. This Guide is supplementary and does not alter any legal obligations under the Lease.
- The Tenant shall complete reinstatement before the lease expiry date. Extension of the lease term for reinstatement purposes requires written agreement from .
- Any damage caused during reinstatement is the Tenant's liability. reserves the right to rectify at the Tenant's cost and deduct from the tenancy deposit.
- The deposit shall only be released after: (a) joint final inspection completed and defects cleared; (b) waste manifests submitted; (c) all keys, access cards and equipment belonging to returned.

PART 13

Retail, F&B & Shopfront Fit-Out

Shopfront & Signage · Hoarding & Graphics · Food & Beverage · Trading Operations · Hot Work

AT A GLANCE · PART 13 Retail, F&B & Shopfront Fit-Out

In this Part	Shopfront design, signage, hoarding, F&B kitchen/exhaust, entertainment uses, trading hours and retail fire safety.
Who acts	Retail tenant, QP, contractor
Key forms & refs	Appendix B; Form RP/F1
Building-specific	Frontage lines, signage zones, exhaust routing and trading hours — see Part 14A and Appendix O.

This Part applies to retail, food & beverage (F&B), cineplex and other non-office tenancies, and to the retail or F&B components of mixed-use assets. It is read together with — not instead of — the design, sustainability, technical, construction, commissioning and reinstatement requirements in Parts 3 to 12; where a requirement here and a general Part differ, the stricter applies. Building-specific criteria, nominated contractors, rates and contacts are given in the Building Addendum (Appendix O, including the Retail / F&B addendum at O.6). For integrated and mixed-use developments, the Building Addendum additionally carries an operating overlay covering public-realm interfaces, shared utilities, digital signage, events and waste logistics.

13.1 SHOPFRONT & STOREFRONT DESIGN

Purpose

The shopfront is part of the mall's shared environment. Its transparency, quality and finish affect the whole asset, so reviews shopfront design as a brand-and-quality gate, not only for code compliance.

Mandatory Requirements

- Design to the building's Tenancy Design Guidelines (issued with the Building Addendum). Submit shopfront elevations and sections, a materials and finishes schedule, and a method statement for approval before any fabrication.
- Open, transparent frontage: provide the minimum clear glazed or open frontage set in the Tenancy Design Guidelines (typically a substantial majority of the lease-line width). Solid, mirrored or blanked-out frontages are not permitted unless the approved concept expressly allows.
- Threshold: the finished floor level must be flush with the mall floor at the lease line — no steps, ramps or lips across the shopfront line.
- Shopfront line: all fixtures, doors, grilles and displays sit within the demised boundary. Nothing may encroach the common corridor, and no fixings are permitted to common walls, columns, fascia or ceilings.
- Materials and durability: commercial-grade, non-combustible or FSSD-approved finishes; safety/tempered glass to shopfronts; concealed fixings; a high standard of finish maintained throughout the tenancy.
- Security shutters/grilles, where permitted, are open-grille or perforated to keep the frontage visually permeable; motor and housing concealed.
- Shopfront and display lighting is designed to the building standard using efficient sources per Part 4 (GMI), with no light spill or glare into the common mall.

DESIGN CONTROL: may require changes to protect the quality, coherence and brand of the asset. Fabrication that proceeds before shopfront approval is at the tenant's risk and may have to be removed and redone at the tenant's cost.

13.2 SIGNAGE & DISPLAY

Mandatory Requirements

- Any signage visible from the common mall — including signage inside the unit but seen from outside — requires approval. Submit design, dimensions, location, materials, illumination and fixing method.
- Primary signage sits within the designated signage zone only, to the dimensions and setbacks in the Tenancy Design Guidelines. No signage is allowed on common corridor walls, columns, ceilings or fascia outside that zone.
- Illuminated signage uses concealed LED sources and is lit during mall trading hours (and reasonable pre- and post-trading periods) unless directs otherwise.
- Digital or LED display screens require separate approval; content, brightness and electromagnetic compatibility must be controlled (see 7.7 EMC, and 7.9 where the screen is networked).
- Promotional stands, A-frames, banners and temporary signage in the common mall are not permitted without 's written consent.

13.3 HOARDING & GRAPHICS DURING FIT-OUT

Mandatory Requirements

- A full-height hoarding must be erected along the lease line before any demolition, reinstatement or fit-out work begins, and kept in place until the shopfront is complete.
- The hoarding runs floor to soffit, is stable and safe, prevents unauthorised access, and contains dust and noise. Landlord finishes behind the hoarding must be protected.
- Hoarding graphics follow the building's hoarding-graphic standard and carry the store name / opening tagline and any public-safety notices. Graphics are kept clean and undamaged for the whole fit-out period.
- The hoarding design — and any hoarding above about 3 m high — is submitted with Qualified Person endorsement for structural adequacy, including layout, fixing and access-door details.
- Continuity between tenancies: an outgoing tenant must allow the incoming tenant to apply hoarding graphics on hand-back. Failing that, the outgoing tenant installs -approved interim graphics at its own cost.
- The hoarding is removed only after shopfront completion and with 's approval; make good any common-area finishes affected.

NO HOARDING, NO START: Reinstatement and fit-out works may not begin until the approved hoarding is erected and, where required, QP-certified.

13.4 FOOD & BEVERAGE — KITCHEN, EXHAUST, ODOUR & GAS

Purpose

F&B fit-outs carry higher fire, grease, odour and hygiene risks that affect neighbouring tenants and shoppers. This section consolidates the F&B requirements and is read with 7.8 (Kitchen & F&B Exhaust) and Appendix B.

Mandatory Requirements

- Kitchen exhaust and make-up air are sized for the cooking type, with stainless-steel canopy hoods, connecting only to the designated exhaust riser or point. The kitchen is kept under slight negative pressure to the dining area to contain odour.
- Odour and grease control uses multi-stage treatment appropriate to the cuisine — ultraviolet or electrostatic (ESP) treatment plus activated-carbon filtration — sized to control odour, grease and smell to neighbours and the common mall. A maintenance regime and cleaning log are provided.
- Kitchen exhaust ductwork is fire-rated to SCDF requirements, grease-tight, fire-stopped at penetrations, and provided with cleaning access.
- A grease interceptor/trap sized to NEA/PUB requirements is installed with clear access for cleaning. Grease must not discharge to the sanitary or stormwater system.
- Gas installation is authority-approved and designed and installed by a Licensed Gas Worker/Plumber. A gas solenoid valve with bypass switch is provided; 's representative attends the gas turn-on; the bypass-switch key is held by and released to the tenant's Licensed Gas Worker when required.
- Wet areas are fully waterproofed with turn-ups; floor traps/gullies, sink and dishwasher connections run to approved points; food-waste is handled hygienically and connected to the building's food-waste system where one is provided.
- Ventilation, make-up air and exhaust are balanced and certified on completion; certified records are submitted to .

LICENSING & HYGIENE: F&B tenants must also obtain all SFA food-shop and NEA approvals/licences and any SCDF clearances before trading, and design to those standards from the outset.

13.5 CINEPLEX, ENTERTAINMENT & SPECIAL USES

Mandatory Requirements

- Acoustic separation (airborne and impact) is designed to protect neighbouring tenants and shoppers; sound and vibration from equipment, plant and low-frequency audio must not transfer to adjoining premises or structure.
- Structural loading for heavy fit-outs — raked seating, equipment, water features, heavy displays — is verified and endorsed by a Qualified Person against the building-specific loadings in the Building Addendum.
- High-occupancy spaces meet Fire Code egress and crowd-management requirements, with enhanced ventilation and fresh-air provision for occupant load.
- Audio-visual and specialist plant are isolated for vibration and served by dedicated, metered supplies where required.

13.6 RETAIL OPERATIONS & TRADING HOURS

Mandatory Requirements

- Fit-out work and deliveries take place within the permitted hours in Part 8 and the Building Addendum. Noisy, dusty or odorous work is restricted to non-trading hours where the unit adjoins trading areas.
- Air-conditioning is provided to common and demised areas during mall operating hours. Cooling or chilled water beyond operating hours — for extended fit-out, testing or trading — requires prior application and is charged per the Building Addendum and the Schedule of Fees (Appendix P).
- Deliveries, loading and removal use the designated loading bay and service lift only, by booking; the route's common areas are protected and no staging is allowed in the common mall.

- During trading, the shopfront and signage are kept lit, goods and displays do not encroach the common mall, and noise, odour and refuse are managed to the agreed standards.
- The tenant provides and maintains the Point-of-Sale turnover-data interface required under the lease (see the Tenant Point-of-Sale (POS) System Interface section).

13.7 RETAIL FIRE SAFETY & HOT WORK

Second-layer sprinklers & life safety

- Where a suspended ceiling is installed, the tenant designs, supplies, installs, tests and maintains the second (lower) sprinkler layer through 's appointed fire contractor (see 7.4); sprinkler coverage and clearances are maintained at all times.
- Emergency lighting and exit signage are provided within the unit to the Fire Code, and egress paths and exits are kept unobstructed.
- Ceiling and concealed-space materials are non-combustible or FSSD-approved, observing Fire Code limits on combustibles within the ceiling void.

Hot-work permit

- Hot work (welding, cutting, grinding, brazing) requires a Hot Work Permit approved before work starts; the application is submitted at least three working days ahead.
- Only competent, qualified personnel carry out hot work; a minimum of two persons is present throughout, with a trained fire watch and a charged extinguisher or hose reel at the work area for high-risk work.
- Oxygen, acetylene and other gas cylinders are placed and stored away from the work area; adequate ventilation is provided; generators are stopped before refuelling; and combustibles are cleared or protected.
- The Fire Command Centre / Building Management is notified within 30 minutes of completing hot work for inspection. Work stops immediately if unsafe conditions are found, and all hot work complies with the Fire Safety Act.

KEY REFERENCES: Part 7 (7.4 Fire Protection; 7.8 Kitchen & F&B Exhaust), Part 8 (Permit to Work and permitted hours), Appendix B (technical schedules), and the Building Addendum (Appendix O.6) and Schedule of Fees (Appendix P).

PART 14A

Building-Specific Requirements

Where the Manual Defers to the Building · Consolidated Asset Parameters · Building Addendum Index

This Manual is a single Group standard. Requirements that vary by building — capacities, targets, contacts, hours, thresholds and asset-specific rules — are not repeated in every Part; they are consolidated here and issued in full through the Building Addendum (Appendix O) for each asset. This Part is the single index of everything the Manual defers to the building level, so a tenant can see at a glance what to confirm for their specific building.

NOTE: The values for your building are in its Building Addendum (Appendix O), issued by Building Management. This Part lists WHAT is building-specific; the Addendum provides the ACTUAL values. Where a building schedule, addendum or overlay sets a stricter requirement than this Manual, the stricter applies.

14A.1 HOW BUILDING-SPECIFIC REQUIREMENTS WORK

- The Manual (Parts 1–15) sets the corporate standard that applies at every building.
- The Building Addendum (Appendix O) sets the building-specific values and rules for one asset, and is issued to each tenant with their fit-out pack.
- Where relevant, an asset-class overlay (retail, office, mixed-use, business park, hospitality) further tailors requirements; overlays are administered under the companion Asset Performance Platform Standard and surfaced through the Addendum.
- This Part 14A cross-indexes, Part by Part, exactly which items are building-specific — use it with your Building Addendum.

14A.2 CONSOLIDATED BUILDING-SPECIFIC INDEX

The table below lists, for each Part of the Manual, the requirements that are set at building level. Confirm each against your Building Addendum (Appendix O) before designing or submitting.

Manual Part	Building-specific requirements (values in the Building Addendum)	Manual ref
Part 1 — Welcome	Building name, address and development facts; Green Mark rating; key contacts	1.4; Key Contacts
Part 2 — Tenant Journey	Fit-Out Concierge contacts; building programme and milestone dates; portal access	2.4
Part 3 — Design Excellence	Facade and shopfront parameters; DRP thresholds; workplace benchmark ranges	3.2, 3.7–3.9
Part 4 — Sustainability	Building GMI target tier; energy budget (EUI); embodied-carbon limits; renewable provisions	4.2, 4.4, 4.10
Part 5 — Green Lease	Green Lease Sustainability Requirements in Parts 4, 5 and 11; asset-specific stricter sustainability targets	5.7
Part 6 — Submissions	Authority routing and QP/PE/LEW nomination lists; submission portal	6 (all)

Manual Part	Building-specific requirements (values in the Building Addendum)	Manual ref
Part 7 — Technical	Electrical capacity and tap-off points; ACMV chilled-water/condenser provisions; riser and load limits; gas availability	7.2–7.11
Part 8 — Construction	Site hours; access, hoisting and loading routes; hoarding lines; noise windows	8.2, 8.7
Part 9 — T&C	Base-building system tie-in points and witnessing requirements	9.1
Part 10 — Handover	O&M and digital-handover formats; deposit-refund checklist specifics	10.5–10.7
Part 11 — Operations	Dashboard access; after-hours cooling terms; resilience thresholds and BCP	11.10, 11.11
Part 12 — Reinstatement	Make-good baseline and reinstatement scope for the tenancy	12 (all)
Part 13 — Retail/F&B	Frontage lines; signage zones; F&B exhaust routing; trading hours; grease and gas provisions	13.1–13.6
Part 15 — Flexible Workspace	Available flex products and suite inventory; short-form track limits	15.1, 15.4

14A.3 BUILDING ADDENDUM INDEX (APPENDIX O)

Each Building Addendum follows a standard index so tenants find the same information in the same place at every building:

Addendum section	Contents
O.1 Building facts	Name, address, development, Green Mark / WiredScore / SmartScore ratings, gross areas
O.2 Contacts	Building Management Office, Fit-Out Manager, emergency and authority contacts
O.3 Design parameters	Facade/shopfront lines, floor loadings, ceiling heights, workplace benchmark ranges
O.4 Technical capacities	Electrical, ACMV, water, gas, ELV/ICT provisions and tap-off points
O.5 Sustainability targets	GMI tier, EUI budget, embodied-carbon limits, renewable and resilience thresholds
O.6 Site & operations	Working hours, access and hoisting, hoarding, trading hours, dashboard access
O.7 Green Lease reference schedule	Building-specific Green Lease reference schedule and any stricter asset-specific clauses
O.8 Schedule of fees	Building-specific charges (Appendix P)

NOTE: If your Building Addendum has not been issued, request it from the Building Management Office before starting design. Do not assume values from another building — they vary by asset.

14A.4 GREEN LEASE REQUIREMENTS

This schedule is reproduced for building-specific reference only. The operative sustainability requirements are contained within Parts 4, 5 and 11 of this Manual.

Part 14A.4 remains a building-specific legal traceability schedule. It does not become the primary source of sustainability compliance and does not relax the Green Lease Sustainability Requirements in Parts 4, 5 and 11.

Where the Lease Agreement or a Building Addendum containing stricter requirements conflicts with this Manual, the Lease Agreement or stricter Building Addendum requirement prevails.

14A.4.1 Retail Green Lease Requirements

Project: Union Square – Retail · 22 July 2024 · Prepared by DP Sustainable Design Pte Ltd · Reviewed by Libra Pte Ltd

Union Square — Retail is a Green Mark Platinum-SLE rated building, assessed under Building & Construction Authority (BCA) Green Mark 2021. This Green Lease is applicable to the 1st storey and 2nd storey commercial space. Under the Green Mark 2021 Platinum-SLE criteria, the building is required to be designed and operated to be sustainable, healthy and energy efficient with minimum 40% energy savings compare to the current code for the non-residential areas.

General

The landlord and tenant(s) are committed to manage, operate and occupy the building and premises to promote environmental sustainability, through energy efficiency improvements, positive behavioural changes and healthy practices. This document forms a part of the lease agreement with penalties for non-conformity.

Section A: Minimum Standards (Landlord)

A1 Certification

- I. The Tenant agrees that the Landlord shall be entitled to operate, manage and maintain the building so as to achieve at least the BCA Green Mark Platinum-SLE under Green Mark 2021 or the future applicable BCA Green Mark certification standard. The landlord commits to maintain this level of certification during the certification period.

A2 Building Management

- I. Tools to support tenant to calculate design water consumption and to provide up-to-date information and advice on water fittings, equipment.

A3 Waste Management

- I. Engage a waste contractor to provide sufficient recycling receptacles that are easily accessible by tenants, and dedicated space for separate collection and segregation of waste and recyclables (e.g. paper/cardboard, plastics, glass, metals, e-waste).

Section B: Additional Standards (Landlord)

Resource Management

B1 Efficient Water Management

- I. Installation of 3-ticks Water Efficiency Labelling Scheme (WELS) fittings for premises.

B2 Efficient Waste Management

- I. Implement a 3R (reduce, reuse, recycle) programme that involves tenant participation, when the desirable tenant occupancy rate is achieved.
- II. Waste audit conducted annually to identify and quantify the sources, amount and types of waste generated in the premises. A waste audit entails the following: (i) create an audit checklist for all waste types generated from each tenant premises, (ii) collect waste samples from all tenant premises, (iii) sort the waste into different types according to the checklist and (iv) weigh the waste types, record the data and analyse results to identify opportunities for waste reduction and recycling.

Landlord's Support to the Tenant

B3 Assistance in tenant calculations and compliance checks

- I. Assistance in assessment of the overall power consumption, including lighting design review, and providing design advice for the Tenants as a part of their fit out / renovation.
- II. Provide support to the tenant during operations to reduce the tenant operational consumption of energy and water.

B4 Monitoring and reporting of energy, water and waste

- I. Provide annual assessments of tenant electricity consumption based upon tenant submissions.

B5 Tenant engagement and education programmes

- I. Conduct annual sustainability education programme to the building occupants.
- II. Conduct Post Occupancy Evaluation survey once every 3 years.

Good Practices

B6 Reducing Car Dependency

- I. Adequate provision of secure and sheltered bicycle storage.
- II. Showers, changing rooms and lockers for cyclists.

Section C: Minimum Standards (Tenants)

This section provides a list of clauses that are required to be implemented.

C1 Management of Energy Use

- I. Lighting Power Budget for tenants' spaces should achieve minimum 60% improvement over SS 530:2014 Reference (maximum building interior lighting power density for compliance). Required lighting power budget for different spaces are listed below.

Description	Required Lighting Power Budget (W/m ²)
Retail — Jewellery (including all general, accent, display lights, etc.)	14
Retail — Furniture, clothing and accessories, cosmetics, artwork	10
Retail — Supermarket, vehicle, sporting goods, stationary, hardware	8
Retail — Others	6
Restaurants, Lounges, and Bars (including dining area and food preparation, accent, display, decorative)	5

- II. All light fittings shall be energy saving and should be LED or better. Dimmable feature should be considered for greater energy efficiency where lighting levels can be controlled per user requirements.
- III. The measured indoor lighting levels should comply with the recommended illuminance (average lux level) stated in SS 531: 2013 or prevailing standards.
- IV. Air Conditioning Temperature Control Zone shall be $\leq 100\text{m}^2$. Dedicated thermostat controls to allow occupant to adjust air speeds and temperatures in discrete zones in open areas or by room. Controls shall provide the logic to modify the operation of the FCU, Ceiling fan speed or other system employed, which will adjust thermal comfort in that zone.

C2 Sustainability Management

- I. The Tenants shall participate in a Post Occupancy Evaluation (POE) survey once every 3 years conducted by Building Management and take corrective actions accordingly where applicable.

- II. The Tenants shall participate in any waste management/3R training/education organised by the Building Management.

Section D: Additional Standards (Tenants)

This section provides a list of clauses that are encouraged to be implemented where possible.

Resource Management

D1 Water Usage

- I. Installation of 3-ticks Water Efficiency Labelling Scheme (WELS) fittings within the Tenants' premises, where applicable.
- II. Tenant to display water conservation posters at water usage areas within its own premises.

D2 Metering

- I. Provision of private water meters to monitor all major water usage such as pantries, kitchens, toilets and washing areas, where applicable and at least monthly monitoring of premises' water usage.

D3 Air-Conditioning and Control systems

- I. Lighting control to include occupancy sensors and interlocked with perimeter lighting with local overrides. Enclosed spaces to have dedicated light switches and auto switch off when not in use.
- II. All control systems to be regularly checked and maintained.

Materials & Fit Out

D4 Fit out and renovations

- I. Interior paints, varnishes, sealants and adhesives to be low VOC using natural and water based products where possible. These products to be certified with at least SGBP 2 ticks or equivalent by local certification bodies.
- II. Furnishings, furniture and carpets to be certified with at least SGBP 2 ticks or equivalent by local certification bodies containing recycled materials and be low VOC.

D5 Equipment

- I. Energy Star or NEA Energy Efficiency Labelling rating as a minimum requirement for all applicable equipment.
- II. Installation of water dispensers to reduce use of bottled water/disposable cups and encourage use of reusable cups.
- III. Use of Mandatory Energy Labelling Scheme (MELS) regulated appliances with highest tickrating (i.e. 5 ticks for television, 4 ticks for refrigerator, 3 ticks for lamp).

Good Practices

D6 Cleaning

- I. Tenant shall require that in any cleaning contracts granted directly by it, the cleaning contractor shall use cleaning products certified in accordance with at least SGBP 2 ticks or equivalent by local certification bodies.
- II. Use of NEA-registered pesticides and vector control products which are suitable for indoor use.

D7 Waste and Resource Management

- I. Purchasing and Management of Goods
 - Work with suppliers to deliver goods without or with less disposable packaging
 - Purchase products with recycled content/less packaging material
 - Purchase reusables instead of single-use items wherever possible
- II. Facilities and Operations
 - Provide reusables instead of single-use items for staff use (e.g. reusable crockery and cutlery at pantries, reusable bags, water dispensers/water jugs and reusable cups in meeting rooms)

- Go digital (e.g. online portal, sharing platforms, online repository)
- Provide recycling bins within the premises for staff to recycle paper/cardboard, plastic, glass, and metal

D8 Indoor Contaminants Management

- I. Conduct pre-occupancy flush out after the completion of construction and all fitting-out of interior finishes (including fixed furniture and furnishings) for all occupied spaces to remove the contaminants.
- II. Local isolation and exhaust systems to remove pollutants at source e.g. utility areas (for printing and photocopying), toilets, cleaning and chemical storage.
- III. Monitoring systems to ensure optimal thermal and indoor air quality standards as set out in SS 554: 2016 or prevailing standards.
- IV. Ventilation and air conditioning systems to be regularly inspected, cleaned and maintained to ensure the required ventilation provision into occupiable spaces in a building according to SS553:2016 or prevailing standards.

14A.4.2 Office Green Lease Requirements

Project: Union Square Central · 25 June 2025 · Prepared by DP Sustainable Design Pte Ltd · Reviewed by Centro Property Holding Pte Ltd / Central Mall Pte Ltd

Union Square Central is a Green Mark Platinum – Super Low Energy (SLE) rated building, assessed under BCA Green Mark 2021 (the project rating will be in accordance with the Green Mark 2021 (2nd edition) released in June 2024). This Green Lease is applicable to the entirety of Union Square Office Tower. Under the Green Mark 2021 Platinum-SLE criteria, the building is required to be designed and operated to be sustainable, healthy and energy efficient with minimum 40% energy savings compare to the current code for the non-residential areas.

General

The landlord and tenant(s) are committed to manage, operate and occupy the building and premises to promote environmental sustainability, through energy efficiency improvements, positive behavioural changes and healthy practices. This document forms a part of the lease agreement with penalties for non-conformity.

Section A: Minimum Standards (Landlord)

This section provides a list of clauses that are required to be implemented.

A1 Certification

- I. The Tenant agrees that the Landlord shall be entitled to operate, manage and maintain the building so as to achieve at least the BCA Green Mark Platinum-SLE under Green Mark 2021 or the future applicable BCA Green Mark certification standard. The landlord commits to maintain this level of certification during the certification period.
- II. The Tenant agrees that the Landlord shall be entitled to operate, manage and maintain the building so as to achieve at least the WiredScore's WiredScore Platinum and SmartScore Platinum certification standards. The landlord commits to maintain this level of certification during the certification period.

A2 Building Management

- I. Tools to support tenant to calculate design water consumption and to provide up-to-date information and advice on water fittings, equipment.

A3 Waste Management

- I. Engage a waste contractor to provide sufficient recycling receptacles that are easily accessible by tenants, and dedicated space for separate collection and segregation of waste and recyclables (e.g. paper/cardboard, plastics, glass, metals, e-waste).

Section B: Additional Standards (Landlord)

Resource Management

B1 Efficient Water Management

- I. Installation of 3-ticks Water Efficiency Labelling Scheme (WELS) fittings for premises.

B2 Efficient Waste Management

- I. Implement a 3R (reduce, reuse, recycle) programme that involves tenant participation, when the desirable tenant occupancy rate is achieved.
- II. Waste audit conducted annually to identify and quantify the sources, amount and types of waste generated in the premises. A waste audit entails the following: (i) create an audit checklist for all waste types generated from each tenant premises, (ii) collect waste samples from all tenant premises, (iii) sort the waste into different types according to the checklist and (iv) weigh the waste types, record the data and analyse results to identify opportunities for waste reduction and recycling.

Landlord's Support to the Tenant

B3 Assistance in tenant calculations and compliance checks

- I. Assistance in assessment of the overall power consumption, including lighting design review, and providing design advice for the Tenants as a part of their fit out / renovation.
- II. Provide support to the tenant during operations to reduce the tenant operational consumption of energy and water.

B4 Monitoring and reporting of energy, water and waste

- I. Provide annual assessments of tenant electricity consumption based upon tenant submissions.

B5 Tenant engagement and education programmes

- I. Conduct annual sustainability education programme to the building occupants.
- II. Conduct Post Occupancy Evaluation survey once every 3 years.

Good Practices

B6 Reducing Car Dependency

- I. Adequate provision of secure and sheltered bicycle storage.
- II. Showers, changing rooms and lockers for cyclists.

Section C: Minimum Standards (Tenants)

This section provides a list of clauses that are required to be implemented.

C1 Certification

- I. The Tenant agrees that it shall use its best endeavours to comply with all the provisions of this Lease, the guidelines and prescriptions in the Fitting Out Manual and any other document issued by the Landlord or the Management Corporation from time to time on environmental sustainability in carrying out fitting-out works, addition and alteration works in the Premises and in connection with its occupation of the Premises pursuant to this Lease (including, but not limited to, co-operating with the Landlord and the relevant authorities if and when requested to review its energy consumption in connection with its operations at the Premises).

C1 Management of Energy Use

- I. Lighting Power Budget for office spaces not more than 5 watts per square meter (W/m²) or should achieve minimum 60% improvement over SS 530:2014 Reference (maximum building interior lighting power density for compliance). Other space typologies should refer to the table below for the associated lighting power budget.

Description	Required Lighting Power Budget (W/m ²)
Offices, Meeting Rooms, and Copy/Print Rooms	5
Restaurants, Lounges, and Bars (including dining area and food preparation, accent, display, decorative)	5
Toilets and Changing Rooms	4

- II. The measured indoor lighting levels should comply with the recommended illuminance (average lux level) stated in SS 531: 2013 or prevailing standards.
- III. Supplementary Lighting: If task lighting or decorative lighting is installed, it should be included in the lighting power load (for task lighting) and the equipment power load (for decorative lighting). Agreement with the Landlord is required, pending Green Mark requirements.
- IV. All light fittings shall be energy saving and should be LED or better. Dimmable feature should be considered for greater energy efficiency where lighting levels can be controlled per user requirements. The LED lights shall comply to the following:
 - LM80 B30 L70@50,000 which requires less maintenance
 - DC output type complying to IEC 62384 and IEC 61347 Part 1 and Part 2-13
 - Tested to ANSI/IES LM-79-19 and LM-80-15
- V. Lighting Control: Occupancy or vacancy sensor shall be provided to adjust the dimming level of the light fixtures or automatically turns light off when motion is no longer detected.
- VI. Air Conditioning Temperature Control Zone shall not exceed 100m². Dedicated thermostat controls to allow occupant to adjust air speeds and temperatures in discrete zones in open areas or by room. Controls shall provide the logic to modify the operation of the VAV box, FCU, Ceiling fan speed or other system employed, which will adjust thermal comfort in that zone.
- VII. Air Distribution efficiency should not exceed 0.16 kW/RT.
- VIII. Demand Control: Automatic controls for the air-conditioning system to respond to periods of non-use or based on measured occupancy.
- IX. Newly installed equipment shall be easily accessible for maintenance.

C2 Sustainability Management

- I. The Tenants shall participate in a Post Occupancy Evaluation (POE) survey once every 3 years conducted by Building Management and take corrective actions accordingly where applicable.
- II. The Tenants shall participate in any waste management/3R training/education organised by the Building Management.

Section D: Additional Standards (Tenants)

This section provides a list of clauses that are encouraged to be implemented where possible.

Resource Management

D1 Energy Intensity and Usage

- I. Monitoring and reporting of tenant consumption with annual average consumption of electricity within its Premises to 75 Kilowatt hours per square meter per year (kWh/m²/yr) based on 55-hour week.
- II. Equipment Plug Load – Average 16 W/m²

D2 Water Usage

- I. Installation of 3-ticks Water Efficiency Labelling Scheme (WELS) fittings within the Tenants' premises, where applicable.

- II. Tenant to display water conservation posters at water usage areas within its own premises.

D3 Metering

- I. Provision of private water meters to monitor all major water usage such as pantries, kitchens, toilets and washing areas, where applicable and at least monthly monitoring of premises' water usage.

D4 Air-Conditioning and Control systems

- I. For areas that require cooling beyond the normal operating hours of the central plant, dedicated supplementary cooling installed (where applicable) are required to meet the minimum of 5 ticks for split unit aircon models up to 10 kW cooling capacity and 3-ticks for split unit aircon models above 10 kW cooling capacity. If using Variable Refrigerant Flow (VRF), 4-ticks with temperature sensors and occupancy sensors shall be installed to control energy usage. The system must be regularly serviced and maintained to ensure operational efficiency.
- II. Enclosed areas to be provided with dedicated thermostat controls (e.g. meeting rooms, closed offices, conference facilities) with auto shut off or ramp down when not in use.
- III. Lighting control to include occupancy sensors and interlocked with perimeter lighting with local overrides. Enclosed spaces to have dedicated light switches and auto switch off when not in use.
- IV. All control systems to be regularly checked and maintained.

Materials & Fit Out

D5 Fit out and renovations

- I. Interior paints, varnishes, sealants and adhesives to be low VOC using natural and water-based products where possible. These products to be certified with at least SGBP 2 ticks or equivalent by local certification bodies.
- II. Furnishings, furniture and carpets to be certified with at least SGBP 2 ticks or equivalent by local certification bodies containing recycled materials and be low VOC.

D6 Equipment

- I. Energy Star or NEA Energy Efficiency Labelling rating as a minimum requirement for all applicable equipment.
- II. Installation of water dispensers to reduce use of bottled water/disposable cups and encourage use of reusable cups.
- III. Use of Mandatory Energy Labelling Scheme (MELS) regulated appliances with highest tickrating (i.e. 5 ticks for television, 4 ticks for refrigerator, 3 ticks for lamp).

Good Practices

D7 Cleaning

- I. Tenant shall require that in any cleaning contracts granted directly by it, the cleaning contractor shall use cleaning products certified in accordance with at least SGBP 2 ticks or equivalent by local certification bodies.
- II. Use of NEA-registered pesticides and vector control products which are suitable for indoor use.

D8 Waste and Resource Management

- I. Purchasing and Management of Goods
 - Work with suppliers to deliver goods without or with less disposable packaging
 - Purchase products with recycled content/less packaging material
 - Purchase reusables instead of single-use items wherever possible
- II. Facilities and Operations

- Provide reusables instead of single-use items for staff use (e.g. reusable crockery and cutlery at pantries, reusable bags, water dispensers/water jugs and reusable cups in meeting rooms)
- Go digital (e.g. online portal, sharing platforms, online repository)
- Provide recycling bins within the premises for staff to recycle paper/cardboard, plastic, glass, and metal

III. Waste Management

- Waste reporting of the entire building inclusive of segregation of recyclable waste streams available to the Tenant.

D9 Indoor Contaminants Management

- I. Conduct pre-occupancy flush out after the completion of construction and all fitting-out of interior finishes (including fixed furniture and furnishings) for all occupied spaces to remove the contaminants.
- II. Local isolation and exhaust systems to remove pollutants at source e.g. utility areas (for printing and photocopying), toilets, cleaning and chemical storage.
- III. Monitoring systems to ensure optimal thermal and indoor air quality standards as set out in SS 554: 2016 or prevailing standards.
- IV. Indoor CO₂ levels compared to outdoor CO₂ levels of not greater than 700 Parts Per Million ("PPM") measured in accordance with SS 554: 2016 or prevailing standard as it may be amended or replaced from time to time.
- V. Ventilation and air conditioning systems to be regularly inspected, cleaned and maintained to ensure the required ventilation provision into occupiable spaces in a building according to SS553:2016 or prevailing standards.

NOTE: These schedules are reproduced for building-specific reference and legal traceability only. The operative sustainability requirements are contained within Parts 4, 5 and 11 of this Manual. For any other managed asset, the applicable building-specific Green Lease reference schedule is issued with the Building Addendum (Appendix O), and only stricter asset-specific requirements supplement the Manual.

PART 15

Flexible Workspace & Fitted Suites

Plug-and-Play Suites · Agile Formats · Reversible Fit-Outs · Design for Disassembly · Space-as-a-Service

AT A GLANCE · PART 15 Flexible Workspace & Fitted Suites

In this Part	Plug-and-play suites, agile formats, reversible fit-out, the short-form track and flex performance metrics.
Who acts	Tenant, Building Management
Key forms & refs	Form RP/F1; 15.4 short-form
Building-specific	Building flex products, suite inventory and short-form limits — see Part 14A and Appendix O.

Occupier demand is shifting toward shorter commitments, fitted space and hybrid working. This Part governs -delivered fitted suites, tenant flex formats and space-as-a-service operations so flexibility is achieved without eroding asset quality, sustainability or data standards. All other Parts apply unless expressly varied here.

15.1 PLUG-AND-PLAY FITTED SUITES

- fitted suites are delivered to a published specification: workpoints per 3.9 reference ranges, meeting and focus rooms, pantry, LED lighting to SS 530, IEQ sensing per 7.10, AMR sub-metering per Appendix I, and GMI-ready material selections per Part 4.
- Incoming tenants adopt the suite as-is or submit a variation-only design package (changed items only) — the full Part 6 drawing matrix does not apply to unchanged elements.
- Suite assets are pre-loaded in the **COBie** register (Appendix U); the tenant verifies rather than recreates the asset data at handover.

15.2 AGILE FORMATS & SPACE-AS-A-SERVICE

- Space-as-a-service and serviced-office operators are tenants under this Manual and additionally: name a resident community/FM manager; take responsibility for end-user behaviour under the house rules; and report utilisation and energy at suite level per Appendix AA so occupancy churn does not break the data chain.
- Sub-occupier fit-out changes remain the operator's responsibility and follow the short-form track (15.4) as a minimum.

15.3 REVERSIBLE FIT-OUT & DESIGN FOR DISASSEMBLY

- Fitted suites and flex floors: design for disassembly is required — demountable partitions, accessible services, mechanically fixed (not adhered) finishes, and modular joinery with declared reuse pathways.
- Conventional tenancies: design for disassembly remains strongly encouraged per 4.5.5 and is scored in the 3.8 scorecard; retained/reusable elements count toward the 4.10 targets.
- At churn, suites are refreshed through the reuse-first hierarchy (4.10) and the circularity stream (12.4) before any new procurement.

15.4 SHORT-FORM TRACK — SUITES ≤ 300 SQM

- Eligible works: layout within existing services zones, finishes, joinery, furniture, graphics; no changes to fire compartmentation, structure, base ACMV or wet services.
- Submission: single consolidated package (layout, finishes schedule, electrical SLD if amended, contractor registration, RA/SWP) with approval targeted within five (5) working days; PTW and site rules (Part 8) apply in full.
- Any work outside the eligible list reverts to the standard Part 6 process. Green Form G1 and waste reporting obligations are unchanged.

15.5 FLEXIBLE WORKSPACE PERFORMANCE METRICS

Purpose

Flexible workspace only creates value if it performs. This section defines how fitted suites, flex floors and space-as-a-service tenancies are measured, so flexibility decisions are made on evidence and align with leasing outcomes.

Performance Metrics

Metric	Target / Basis	Source
Fitted-suite occupancy	≥ 85% of available suite-days per year	Leasing records + Part 16 dashboard
Desk-sharing ratio (flex floors)	0.6–0.8 workpoints per person, per 3.9	Occupancy analytics (7.10)
Collaboration-space effectiveness	≥ 60% booked-hours utilisation of meeting/collab settings	Booking system + sensors
Space-sharing efficiency	Utilised m ² per attending occupant vs 3.9 ranges	Occupancy analytics (7.10)
Revenue per workstation / per m ²	Tracked vs building and portfolio averages (internal)	Leasing system + Part 16
Vacancy-to-income (suites)	≤ 30 days from suite availability to licence commencement	Leasing records
Short-form track service	≤ 5 working days approval (15.4)	Part 14 reporting

Fitted-Suite Refresh Cycle Strategy

- Light refresh at each churn (paint, graphics, joinery adaptation) using the reuse-first hierarchy (4.10) and disassembly design (15.3); target embodied carbon per refresh reported via Appendix G.

- Deep refresh every 7–10 years or when suite occupancy or NPS underperforms building average for two consecutive years; refresh business cases draw on 14.4 and Part 16 analytics.
- Portfolio utilisation benchmarking of flex products is performed in Part 16, informing suite mix, sizing and pricing per asset.

NOTE: Revenue metrics are internal Asset Management data and are not disclosed at tenancy level; utilisation metrics shared with occupiers follow the anonymisation rules in 5.6 and Appendix AA.

APPENDIX A — Landlord's QPs & Nominated Base Contractors + LEW Charges

A.1 Nominated Base Contractors

The following contractors are nominated for specific categories of work. Compulsory nominations must be engaged; optional nominations are recommended but the Tenant may engage alternatives with Landlord no-objection.

S/N	Trade	Company	Pre-TOP	Post-TOP (pre-CSC)	Before DLP expires	Status
1	Electrical & ELV	[See Building Addendum]	Optional	Optional	Optional	—
2	Building LEW	[See Building Addendum — Compulsory]	Compulsory	Compulsory	Compulsory	Compulsory
3	ACMV	[See Building Addendum]	Optional	Optional	Optional	—
4	BMS	[See Building Addendum]	Optional	Optional	Optional	—
5	Plumbing & Gas	[See Building Addendum]	Optional	Optional	Optional	—
6	Fire Protection	[See Building Addendum — Compulsory]	Compulsory	Compulsory	Compulsory	Compulsory

IMPORTANT: Building LEW and Fire Protection Nominated Base Contractors are COMPULSORY throughout the lease term and Defects Liability Period. Refer to the Building Addendum for the names and contacts of Compulsory contractors at your Building.

A.2 LEW Charges for Tenancy Works

Approved Load	PE CS/3 Endorsement	PE Turn-On Fee	Annual Licensing Fee
63A (230V & 400V)	S\$200	S\$200	N/A
80A (400V)	S\$200	S\$200	S\$200
100A	S\$200	S\$300	S\$200
150A	S\$200	S\$300	S\$200
200A	S\$200	S\$350	S\$200
250A	S\$200	S\$350	S\$400
300A	S\$200	S\$350	S\$400
350A	S\$200	S\$350	S\$400
400A	S\$200	S\$350	S\$400
500A	S\$200	S\$350	S\$400

Approved Load	PE CS/3 Endorsement	PE Turn-On Fee	Annual Licensing Fee
600A	S\$200	S\$350	S\$400
700A	S\$200	S\$350	S\$400
800A	S\$200	S\$350	S\$500
1000A and above	S\$200	S\$350	S\$500

Re-test fee: S\$300 per trip. Building LEW engagement: minimum 3 working days before planned turn-on. Tenant shall also engage their own LEW to assume responsibility for electrical works, carry out all submissions and take charge of the electrical installation for one (1) year after turn-on.

A.3 Contractor Contact Details

S/N	Trade	Company	Contact Person	Tel / Email
1	Electrical & ELV / Building LEW	[See Building Addendum]	[See Building Addendum]	[See Building Addendum]
2	ACMV / BMS	[See Building Addendum]	[See Building Addendum]	[See Building Addendum]
3	Sanitary, Plumbing & Gas	[See Building Addendum]	[See Building Addendum]	[See Building Addendum]
4	Fire Protection	[See Building Addendum]	[See Building Addendum]	[See Building Addendum]
5	Building LEW	[See Building Addendum]	[See Building Addendum]	[See Building Addendum]
6	Building Management	[Building Manager — see Building Addendum]	Building Management Office	[Email — see Building Addendum]

APPENDIX B — Technical Reference Specifications

B.1 Chilled Water Quality Parameters

S/N	Parameter	Acceptable Range	Units
1	pH	9.0 – 11.0	—
2	Turbidity	< 20	NTU
3	Total Iron	< 1.0	ppm
4	Total Copper	< 1.0	ppm
5	Conductivity	< 2,500	µS/cm
6	Nitrite	800 – 1,000	ppm
7	Mild steel corrosion coupon	< 1	mpy
8	Copper corrosion coupon	< 0.5	mpy
9	Silicate	< 14	ppm

B.2 Kitchen Exhaust UV-C Grease/Odour Removal System

All kitchen exhaust systems must employ grease extraction and odour control per the following specification:

- Stainless steel kitchen exhaust hoods with first-layer stainless steel grease filters
- UV-C filtration system positioned immediately behind grease filters
- UV-C units: factory-tested; stainless steel housing; system ON indicator; lamp fault indicator; hour run meter; interlock with exhaust fan; UV-C monitor
- Approximate specification: 4×40W (500 mm) + 4×75W (800 mm) tubes per 3,000–8,000 m³/h air volume; UL-listed
- Activated carbon post-filter stage for odour control
- NEA compliance certificate required before occupation

B.3 Acoustic Specifications — Kitchen Ventilation Fans

- Noise level: maximum 65 dBA in kitchen, measured at 1.5 m from nearest cooking hood exhaust fan and nearest fresh air grille
- Fan type: airfoil centrifugal or axial
- Vibration isolation: minimum 50 mm static deflection spring-neoprene in-series isolators
- Submit before installation: fan noise data; acoustic calculations; vibration isolation selection; shop drawings
- Compliance test under normal operating conditions; submit test report with Green Completion Pack

B.4 Glossary of Key Terms

Term	Definition
AMR	Automated Meter Reading — remote/automated collection of meter data via IoT or BMS
BCA	Building and Construction Authority of Singapore

Term	Definition
BMS	Building Management System — centralised building control and monitoring platform
BECC / SBCC	Building Embodied Carbon Calculator / Singapore Building Carbon Calculator — BCA-published tools for embodied carbon assessment
EPD	Environmental Product Declaration — third-party verified lifecycle carbon/environmental data (ISO 14025 / EN 15804)
GMI	BCA Green Mark for Interiors — unified interior fit-out sustainability certification (effective 1 Nov 2025)
GWP	Global Warming Potential — heat-trapping impact of a substance relative to CO ₂ over a 100-year period
IAQ	Indoor Air Quality
ISSB	International Sustainability Standards Board — sets global sustainability disclosure standards (IFRS S1/S2)
LPB	Lighting Power Budget (W/m ²) per SS 530:2024
POE	Post-Occupancy Evaluation
PTW	Permit to Work
QP	Qualified Person — Architect, Structural or Licensed Engineer registered with BCA
REC	Renewable Energy Certificate under SS 673:2021
SGBC	Singapore Green Building Council
SGBP	Singapore Green Building Product labelling scheme (SGBC)
SGLS	Singapore Green Labelling Scheme
SLO	Sustainability Liaison Officer — the Tenant's designated sustainability coordinator
SS 530:2024	Singapore Standard: Code of Practice for Energy Efficiency Standard for Building Services and Equipment (current edition, 2024)
SBTi	Science Based Targets initiative — framework for corporate net-zero target setting
TVOC	Total Volatile Organic Compounds
WELS	Water Efficiency Labelling Scheme (PUB) — minimum 3-tick for all fittings

APPENDIX C — Environmental, Health & Safety Rules for Vendors

C.1 Introduction

These rules set out 's EHS requirements for all Vendors working on -managed sites. "Vendors" includes contractors, sub-contractors, workmen and agents. These rules supplement all applicable Singapore laws and Workplace Safety and Health Act (Cap. 354A) requirements.

C.2 ESG-Qualified Vendors

Vendors with the following qualifications will have preferential consideration:

- bizSAFE Level 3 and above (mandatory for major A&A fit-out works)
- ISO 14001 Environmental Management certification
- ISO 45001 Occupational Health and Safety certification
- BCA Green and Gracious Builder Award
- Use of eco-friendly, recycled or low-carbon materials and equipment

C.3 Work-Specific EHS Rules

Hot Work

No hot work without written approval and Hot Works Permit. Flammable compounds cleared. Fire extinguisher (min. 4.5 kg CO₂) within 3 m at all times. 30-minute fire watch after completion.

Confined Space

No entry without certification by qualified safety assessor. Competent assessor for gas check and atmospheric monitoring throughout entry.

Electrical Work

Competent persons only. RCCB and MCB devices required on all temporary installations. All works comply with CP5 and Singapore EMA requirements.

Noise & Vibration

Hearing protection mandatory at ≥85 dBA. Noise survey before commencement of noisy works. Vibration white finger controls for hand-arm vibration tools.

Working at Height (>2 m)

Secured handhold and foothold required. Where not practicable: scaffolding with properly secured and certified safety harness. Full-time spotter required.

Manual Handling

Manual handling risk assessment for loads >20 kg. Mechanical aids provided. Training for team lifts.

Environment

No oil, chemical or fuel spillage to land or drainage. Drip trays under all internal combustion engines. All industrial waste properly handled, segregated, manifested and disposed through licensed facilities.

Hazardous Substances

Material Safety Data Sheets (MSDS) for all hazardous substances. Proper storage and labelling. PPE provided and used.

C.4 Corporate EHS Policy

is committed to a 'Safe and Green' corporate culture anchored in the 'Conserving as We Construct' ethos since 1995 and the Future Value 2030 sustainability blueprint since 2017. This policy was reviewed by the Board Sustainability Committee and approved by the Board (3 May 2023). All Vendors are expected to share and uphold these values.

APPENDIX D — Green Fit-Out Forms

Form G1 — Green Fit-Out Acknowledgement

Complete and submit with your PTW application. All tenants — regardless of fit-out size.

By signing this Form, the Tenant confirms that it has read, understood and agrees to comply with all sustainability obligations in this Manual, including obligations relating to Scope 1/2/3 carbon data, embodied carbon assessment, energy sub-metering, IAQ testing, construction waste management and the bilateral data sharing protocol in Part 5.

Field	Details — To be completed by Tenant
Company Name (Tenant)	
Unit Number / Premises	
Fit-Out Contract Value (S\$)	
Gross Floor Area (m ²)	
Name of Authorised Representative	
Designation / Title	
Supplementary Cooling Installed? (Y / N)	If Yes — Refrigerant type: _____ GWP: _____ Charge (kg): _____
Embodied Carbon Assessment Required? (Y / N)	Tool used: _____ Submitted with drawings: Y / N
IAQ Testing Required? (Y / N)	Planned test date: _____ Accredited laboratory: _____
Construction Waste Plan Required? (Y / N)	Target diversion rate: _____ Submitted: Y / N
GMI Certification Target	Not pursuing / GMI Gold / GMI GoldPLUS / GMI Platinum / GMI Platinum ZE / TBC
Has the Tenant read and agreed to Parts 4 and 5 of this Manual? (Y / N)	Y / N
Signature of Authorised Signatory & Company Stamp	
Date	

Form G2 — Sustainability Liaison Officer (SLO) Designation

Submit **within 30 days** of lease commencement. Update **within 14 days** of any change of SLO.

The SLO is the Tenant's primary sustainability contact with throughout the lease term. See Part 4.9.

Field	Details — To be completed by Tenant
Company Name (Tenant)	

Field	Details — To be completed by Tenant
Unit Number / Premises	
SLO Full Name	
SLOSLO Full Name	
Job Title / Designation	
SLO Direct Telephone	
SLO Email Address	
Date of Designation	
Tenant's own ESG Reporting Framework (if any)	GRI / CDP / TCFD / ISSB (IFRS S2) / SGX Mandatory / Other: _____ / None
Tenant's own Net Zero or Carbon Reduction Target (if any)	Target: _____ Base year: _____ Target year: _____
Previous SLO (if change of designation)	Name: _____ Date of change: _____
Signature of Authorised Signatory & Company Stamp	

Return completed forms to: Asset Management, via the Building Management Office for your property.

Email: assetmgt@propertiesltd.com.sg | Portal: [see Building Addendum] | Tel: [see Building Addendum]

APPENDIX E — Standard Forms Index

Standard Forms Reference

Form Ref	Form Name	When Required	Submitted Via
RP/F1	Permit to Work (PTW)	Before any fit-out works commence	Tenant Portal
RP/F2	Risk Assessment Form	Submitted with PTW application	Tenant Portal
RP/F3	Contractor's Registration Form	Before Contractor accesses site	Tenant Portal
RP/F4	Application for Temporary Water & Electricity	When temporary utilities are required	Building Management Office
RP/F5	Undertaking — Tenancy Fitting Out Works	Submitted with PTW application	Tenant Portal
RP/F6	Letter of Authorisation and Indemnity	Submitted with PTW application	Tenant Portal
RP/F8	Application for Drainage of Fire Sprinkler System	Before any sprinkler draining; min. 5 WD notice	Tenant Portal
RP/F9	Application for Hot Works Permit	At least 3 WD before hot works	Tenant Portal
RP/F10	Overnight Parking of Bin	At least 3 WD in advance	Building Management Office
RP/F11	Request for Electricity Supply (Forms 1-1, 1-2, 1-3)	For new electricity account opening	Building LEW via Tenant Portal
RP/F12	Tenant Application for New AMR Meter Installation	Before meter installation	Building Management Office
RP/F13	Checklist for Refund of Fitting-Out Deposit	At completion of works	Building Management Office
Appendix D / G1	Green Fit-Out Acknowledgement Form	Submitted with PTW — ALL tenants	Tenant Portal
Appendix D / G2	Sustainability Liaison Officer Designation Form	Within 30 days of lease commencement	Email or Tenant Portal
App. D / G2 update	SLO Change of Designation Notification	Within 14 days of change	Email or Tenant Portal

NOTE: All forms are available on the Tenant Portal for your Building (see Building Addendum for the URL) or from the Building Management Office. The Portal version is always current — do not use printed forms more than 30 days old.

APPENDIX F — Consolidated Submission Register

F.1 Submission Register

Use this register to track all required submissions from pre-design through to post-occupation. The Tenant Portal converts this register into a live digital workflow with owner, due date, status, comments and approval history.

No.	Submission	Stage	Owner	Status / Remarks
F1	Tenant project team contacts and appointment letters	Pre-design	Tenant PM	
F2	Design / fitting-out briefing attendance	Pre-design	Tenant PM	
F3	Architectural layout, RCP, elevations and sections	Concept / Detailed	Architect / ID	
F4	Material board, cut sheets and green product certificates	Detailed	Architect / Sustainability	
F5	M&E plans: electrical, ACMV, plumbing, fire, ELV/BMS	Detailed	M&E QP / LEW	
F6	Lighting power budget and lighting controls narrative	Detailed	LEW / Lighting designer	
F7	Energy and carbon baseline	Detailed	Sustainability consultant	
F8	Metering and BMS integration schedule	Detailed	M&E QP / BMS vendor	
F9	Embodied carbon assessment and materials register	Detailed	Sustainability consultant	
F10	Construction Waste Management Plan	Before PTW	Main contractor	
F11	IAQ plan and low-VOC evidence	Before PTW completion	Sustainability consultant	
F12	Statutory submissions and approvals	Before works completion	QP / FSE / LEW	
F13	PTW, risk assessment, safe work procedures and method statements	Before works	Main contractor	

No.	Submission	Stage	Owner	Status / Remarks
F14	Insurance certificates	Before works	Tenant / contractor	
F15	Deposit / fee payment confirmation	Before works	Tenant	
F16	Pre-condition survey report	Before works	Tenant / contractor	
F17	Testing and commissioning reports	Completion	QP / contractor	
F18	As-built drawings and O&M manuals	Completion	Tenant consultants	
F19	Green Completion Pack	Completion	Tenant / sustainability lead	
F20	SLO Designation Form (Appendix D / G2)	Within 30 days of lease commencement	Tenant	

APPENDIX G — Materials and Embodied Carbon Register

G.1 Materials Register

Complete for all major fit-outs (>1,000 m² or S\$500,000 CV). Submit as part of the Green Completion Pack. Prioritise materials with EPDs, SGBC/SGLS/FSC/PEFC certification, recycled content or take-back arrangements.

Category	Product / Supplier	Quantity	Certification / EPD	Embodied Carbon Data	Reuse / Recycled / Take-back
Raised flooring					
Ceiling system					
Partitions / glazing					
Carpet / flooring					
Timber / joinery					
Steel metalwork					
Furniture					
Lighting					
Major M&E equipment					

APPENDIX H — Construction Waste Reporting Template

H.1 Waste Diversion Report

Complete and submit in the Green Completion Pack. Target minimum 75% diversion by weight from landfill for major fit-outs and reinstatements. $\text{Diversion \%} = (\text{Reused} + \text{Recycled} / \text{Recovered}) \div \text{Generated} \times 100$.

Waste Stream	Generated (kg)	Reused (kg)	Recycled / Recovered (kg)	Disposed (kg)	Diversion %	Evidence / Destination
Metal						
Timber						
Gypsum / ceiling board						
Plastic						
Cardboard / paper						
Glass						
E-waste						
Furniture / workstations						
General waste						
TOTAL						

APPENDIX I — Metering and BMS Integration Schedule

I.1 Metering and Sensor Schedule

Complete and submit as part of the detailed submission and Green Completion Pack. Required for tenancies >500 m².

Meter / Sensor ID	System Served	Location	CT Ratio / Protocol	BMS / AMR Link	Initial Reading / Commission Date	Remarks
	Lighting					
	Small power / plug load					
	ACMV / supplementary cooling					
	Server room / data room					
	Water / pantry					
	CO ₂ sensor					
	Occupancy sensor					
	Temperature sensor					

APPENDIX J — IAQ Test Summary Template

J.1 IAQ Test Results

Complete and submit **within 30 days** of IAQ testing. Testing to be conducted by a BCA-approved or NEA-accredited laboratory not later than **3 months** after steady-state occupancy for major fit-outs. Remediate and retest **within 60 days** where any limit is exceeded.

Parameter	Result	Applicable Standard	Limit /	Complies? Y/N	Corrective Action if Required
Formaldehyde (HCHO)					
TVOC					
PM2.5					
PM10					
Carbon Monoxide (CO)					
Carbon Dioxide (CO ₂)					
Temperature / Relative Humidity					

APPENDIX K — Contractor EHS Acknowledgement

K.1 EHS Acknowledgement

To be completed by the Main Contractor before site mobilisation. By signing, the Contractor confirms it has received, read and understood EHS Rules for Vendors (Appendix C), this Manual, approved PTW conditions, risk assessments and method statements, and will ensure compliance by all workers, subcontractors and agents.

Field	Details — To be completed by Contractor
Contractor Company	
Tenant / Unit No.	
Project Manager / Site Supervisor	
Contact Number / Email	
bizSAFE / ISO 14001 / ISO 45001 / Other EHS Certifications	
Have all workers been briefed on EHS Rules for Vendors?	Yes / No
Have all workers been briefed on PTW conditions and method statements?	Yes / No
Acknowledgement of EHS Rules for Vendors	Yes / No
Acknowledgement that non-compliance may result in Stop Work, penalties or debarment	Yes / No
Signature, Name and Company Stamp	

APPENDIX L — Hot Work and Sprinkler Drainage Controls

L.1 Permit Controls

Permit Type			Key Controls Before Approval
Hot (Form RP/F9)	Work	Permit	Submit at least 3 working days in advance. Confirm safer method not available. Remove combustible materials from work area. Provide charged fire extinguisher within 3 m. Trained fire watch during and 30 minutes after works. Protect floors, walls and openings. Confirm no damage after completion.
Sprinkler (Form RP/F8)	Drainage	Permit	Submit affected zone/valve/panel details at least 5 working days in advance. Attach Hot Work Permit if applicable. Confirm date/time and Nominated Base Contractor for fire protection (see Building Addendum). Pay drainage/recharge/attendance fees. System must be recharged same working day and must not be left uncharged overnight.
Post-Work Close-Out			Remove all equipment and gas cylinders. Inspect for fire risk. Confirm services and property not damaged. Complete final check. Obtain Building Management sign-off before leaving.

APPENDIX M — Reference Standards and Schemes

M.1 Key References

Reference	Application in This Manual
BCA Green Mark / Green Mark Super Low Energy	Base building performance and tenant fit-out compatibility. The specific Green Mark rating for each Building is set out in the Building Addendum.
BCA / SGBC Green Mark for Interiors (GMI)	Tenant GMI Gold-ready minimum pathway and certification support. Effective 1 November 2025.
SS 530:2024	Energy efficiency standard for building services and equipment including Lighting Power Budget references.
SS 531 (prevailing edition)	Illuminance and colour rendering requirements for indoor lighting.
SS 553 (prevailing edition)	Acoustic performance and indoor sound level requirements. $R_w \geq 40$ dB for enclosed spaces.
SS 673:2021	Renewable Energy Certificates for market-based Scope 2 carbon accounting.
Fire Safety Act / SCDF / FSSD / Fire Code	Fire protection, detection, PA life safety, ESCS and egress compliance requirements.
EMA / SP Group requirements	Electrical supply, LEW licensing, metering and electrical turn-on requirements.
PUB WELS	Water efficient fittings — minimum 3 ticks unless a higher standard applies.
NEA MELS / NEA Energy Label	Energy-efficient regulated appliances and supplementary cooling tick requirements.
SGBC / SGBP and Singapore Green Labelling Scheme	Green product certification and low-emission material evidence.
FSC / PEFC	Responsible timber and wood-based products procurement.
EPD (ISO 14025 / EN 15804)	Embodied carbon and lifecycle environmental product information.
WELL / Fitwel	Health and wellness principles for major/headquarters fit-outs.
EHS Rules for Vendors	Vendor and contractor EHS obligations — see Appendix C.
Future Value 2030	's sustainability, decarbonisation and stakeholder engagement blueprint.

APPENDIX N — Acronyms and Abbreviations

N.1 Acronyms

Acronym	Meaning
ACMV	Air-Conditioning and Mechanical Ventilation
AMR	Automatic Meter Reading
BCA	Building and Construction Authority of Singapore
BMS / IBMS	Building Management System / Integrated Building Management System
BTU	British Thermal Unit — used in chilled water metering context
CSC	Certificate of Statutory Completion
DECAM	Decentralised Alarm Monitoring
DLP	Defects Liability Period
EMA	Energy Market Authority
EPD	Environmental Product Declaration
ESCS	Engineered Smoke Control System
F&B	Food and Beverage
FCC	Fire Command Centre
FSC	Fire Safety Certificate / Forest Stewardship Council (context-dependent)
FSE	Fire Safety Engineer
GMI	Green Mark for Interiors
GPO	General Power Outlet
GWP	Global Warming Potential
IAQ	Indoor Air Quality
LEW	Licensed Electrical Worker
LOD	Level of Detail / Development (BIM)
MELS	Mandatory Energy Labelling Scheme
NEA	National Environment Agency
PE	Professional Engineer
POE	Post-Occupancy Evaluation
PTW	Permit to Work
QP	Qualified Person

Acronym	Meaning
RA	Risk Assessment
REC	Renewable Energy Certificate
SGBP	Singapore Green Building Product labelling scheme
SGLS	Singapore Green Labelling Scheme
SLO	Sustainability Liaison Officer
SS	Singapore Standard
TVOC	Total Volatile Organic Compounds
WELS	Water Efficiency Labelling Scheme (PUB)

APPENDIX O — Building Addendum Template

The Manual is the Group standard; the Addendum localises it to one building. Every “[See Building Addendum]” reference in the Manual is answered here. Issue one populated Addendum per asset and keep the Manual unchanged.

O.1 Building Identity & Facts

Field	Guidance / to be completed per building
Building name / development	e.g. [Property], Singapore
Registered address	
Landlord legal entity (deposits, warranties, indemnities)	Used wherever the Manual says “[Landlord legal entity]”
Asset class / permitted use	Office / Retail / Mixed-use — governs which Parts apply
Green Mark rating & edition	e.g. GM:2021 Platinum (Super Low Energy); certificate date
Green Mark badges held	Health & Wellbeing / Resilience / Whole-Life Carbon / Intelligence / Maintainability
Total office GFA / NLA	
Typical floor plate (NLA)	
Floor-to-ceiling height	
Raised floor / ceiling void	
ACMV system type	e.g. central chilled-water FCU, BMS-integrated
Normal / standby power provision	W/m ² and standby kW per floor
Building-specific Lighting Power Budget	Confirm applicable LPB (Manual default 5.0 W/m ²)
Structural floor loadings	General / high-density / plant — confirm per building
End-of-trip & EV facilities	
Digital infrastructure / IoT backbone	

O.2 Key Contacts & Escalation

Complete all contacts. The escalation column sets who to approach if the first contact is unavailable or the matter is urgent.

Function	Team / Company	Contact (tel / email)	Escalation
Building Management Office (primary)			
Asset Management			
Sustainability / Green Lease			
Tenant Portal support			
Building LEW (compulsory)			
Fire Protection contractor (compulsory)			
ACMV / BMS			
Electrical / ELV			
Plumbing & Gas			
24-hour emergency			

O.3 Nominated Base Contractors & QPs (this building)

Populate from Manual Appendix A. Confirm which are compulsory at this asset (Building LEW and Fire Protection are compulsory group-wide).

Trade	Company & contact	Compulsory?	Notes
Electrical & ELV			
Building LEW			
ACMV			
BMS			
Plumbing & Gas			
Fire Protection			

O.4 Portal, Payments & Building-Specific Rates

Field	Notes
Tenant Portal URL & registration	
Deposit payment details (bank / PayNow UEN / beneficiary)	Replaces "[see Building Addendum]" in 8.3
Temporary utility rates (if different from Manual default)	Manual default: electricity/water S\$10/day
Service-lift booking rate & rules	Manual default: S\$20 / 30-min slot

Field	Notes
Sprinkler drainage / chilled-water / bin-parking rates	Confirm current rates; Manual figures are indicative
Working-hours variations for this building	Confirm any building-specific restrictions

O.5 Building-Specific Technical Notes

Record any deviation from, or addition to, the Manual's group technical standards for this building — for example basement-retail ESCS requirements, curtain-wall constraints, KOP locations, chilled-water passivation specifics, or heritage / façade controls.

Field	Notes
Structural / RC system summary	
Curtain-wall / façade constraints	
Knock-Out Panel (KOP) locations	
ESCS / basement-retail requirements (if any)	
Other building-specific requirements	

O.6 Retail / F&B Addendum (mixed-use assets only)

Complete only where the building has retail or F&B; otherwise mark “Not applicable — office asset.” This scopes the lighter retail coverage in the Group Manual.

Field	Notes
Shopfront design & signage control	Max signage dimensions; illuminated-hours policy
Hoarding & graphics handover (outgoing → incoming tenant)	
Kitchen exhaust / grease / gas requirements	Cross-ref Manual 7.8 & Appendix B.2
POS interface requirements	Cross-ref Manual POS section

GOVERNANCE: The Addendum is a controlled document. Version it alongside the Manual, issue it via the Tenant Portal, and re-issue whenever contractors, rates or the Green Mark rating change. Where the Addendum and Manual conflict on a building-specific fact, the current Addendum prevails; the Manual prevails on group standards.

APPENDIX P — Consolidated Schedule of Fees & Charges

All sums are exclusive of prevailing GST and are indicative of the group standard. The current rate for your building is confirmed in the Building Addendum. This schedule consolidates charges that appear throughout the Manual; it does not create new ones.

Chargeable item	Indicative rate (excl. GST)	Manual ref
Fitting-out deposit — office > 3,000 sq ft	S\$1.00 per sq ft	8.3
Fitting-out deposit — office/retail ≤ 3,000 sq ft	S\$2,000–S\$5,000 by band	8.3

Chargeable item	Indicative rate (excl. GST)	Manual ref
Moving deposit (bulky items)	S\$2,000	8.3
Temporary electricity	From S\$10 / day	8.4
Temporary water	S\$10 / day	8.4
Service-lift booking	S\$20 / 30-min slot (max 2 slots)	8.7.3
Overnight bin parking	S\$54 incl. GST / bin / night	8.7.4
Sprinkler drainage	S\$300 / occasion (Form RP/F8)	7.4
Auxiliary chilled water — consumption	S\$1 / RT (monthly)	7.3
Auxiliary chilled water — drainage & charge-up	S\$500 / occasion	7.3
Standby power — additional capacity	S\$1,000 / kVA (subject to availability)	7.2
LEW — PE endorsement	S\$200	App. A.2
LEW — PE turn-on fee	S\$200–S\$350 by load	App. A.2
LEW — annual licensing fee	S\$200–S\$500 by load	App. A.2
LEW — re-test	S\$300 / trip	App. A.2
Security pass — lost / not returned	S\$20–S\$30 / pass	8.7.3
Lift-lobby / common-corridor protection (failure to protect)	S\$1,000 / floor	8.7.3

Penalties are listed separately in the Penalties Schedule (8.8) and are not reproduced here. Where a fee here differs from the Building Addendum, the Addendum's current rate applies.

APPENDIX Q — Tenancy Forms (Blank Templates)

The following are clean, building-agnostic templates of the standard tenancy forms, styled to this Manual. Entity names, addresses, rates and deposits appear as blanks or are deferred to the Building Addendum; complete them for the specific building before issue. Each form is designed to be printed and completed, or adapted electronically.

EMA Single-Line-Diagram Submission

Applies to contestable customers (typically where supply exceeds 45 kVA, or as advised for the building).

The Tenant shall engage their own Licensed Electrical Worker (LEW) to assume responsibility for the electrical works, submit the single-line diagram to the Energy Market Authority (EMA), register with a retailer, and take charge of the electrical installation for one (1) year after turn-on.

Appointments for inspection and turn-on shall be arranged at least three (3) working days in advance. Re-test or abortive-trip fees, where applicable, are set out in the Building Addendum.

Form RP/F1 — Permit to Work (PTW)

PTW No.	/ /		
Name of Applicant			
Contact No.			
Company Name & Address			
Company Fax No.		Email Address	

Briefing confirmation (please tick after briefing)

☐ Building EHS In-House Rules ☐ EHS Policy ☐ EHS Targets & Objectives

Type(s) of work involved (tick all relevant boxes)

☐ 1. Hot works (also complete RP/F7) ☐ 2. Lifting operations ☐ 3. Confined-space entry ☐ 4. Temporary generator ☐ 5. Isolation of energy source (LOTO lock no.: _____)		☐ 6. Work at height: ☐ a) Gondola ☐ b) Scaffold ☐ c) Boom lift / aerial platform ☐ 7. Others (specify): _____	
Brief description of the works to be carried out			
Exact location(s) / areas to be cordoned off; machinery, vehicles & equipment to be deployed			
Expected duration — From	(Date / Hrs)	To	(Date / Hrs)
Name of applicant's service provider(s) (must be trained and competent)			

Checklist for applicant

Item	Yes	No	N/A
Comprehensive risk assessment (RA) carried out and briefed to the workers?	☐	☐	☐
RA covers work-at-height / fall-from-height risk (false ceilings, unguarded openings, non-load-bearing walls or floors)?	☐	☐	☐
Proper barricades and safety signs available to close the work area(s)?	☐	☐	☐
Service provider(s) engaged for the work competent?	☐	☐	☐
Work supervised by a competent person?	☐	☐	☐
Locations / areas involved suitable for the works?	☐	☐	☐

Item	Yes	No	N/A
Machinery / equipment approved by the relevant authorities?	☐	☐	☐
Confined-space supervisor and safety assessor are two different persons?	☐	☐	☐

Applicant's certification

I/We are fully aware of the safety and health requirements under the applicable Singapore legislation and regulations and undertake to comply with these and any other requirements imposed by the relevant authorities and by Building Management. I/We accept responsibility for any lost or damaged access/contractor pass at the rate set out in the Building Addendum.

Signature of Applicant	Date

Approval (for Building Management use only)

Approval is given based on the fulfilment of the above stipulated conditions by the Applicant.

Department & Officer		Contact No.	
Signature		Date	

Form RP/F2 — Risk Assessment (RA)

Project / Unit		Date	
Contractor		Work activity	
Assessed by		Approved by	

Risk assessment

Risk Level = Likelihood (1–5) × Severity (1–5). Use additional sheets if necessary.

No.	Work activity	Hazard	Possible harm	Risk controls	Risk level
Assessed by (Signature / Date)			Approved by (Signature / Date)		

Form RP/F3 — Contractor's Registration

To be completed by the Contractor.

Name of Company			
Name of Tenant / Unit			
Date of commencement		Expected completion	

Person(s)-in-charge

Name	NRIC / Passport No.

Workmen / sub-contractors

Name	NRIC / Passport No.

Undertaking

We confirm that all foreign workers employed on site have legal and valid work permits issued by the relevant authorities, and undertake that we shall not at any time during the fitting-out works employ, permit or cause the employment of any illegal foreign workers at the premises. We agree to indemnify the Landlord in respect of any claims, actions, proceedings, damages or costs arising from any breach of this undertaking.

Signature of Person-in-Charge	Date
Name & Designation	

Form RP/F4 — Application for Temporary Water & Electricity Supply

Name of Tenant / Unit	
Contractor	
Contact person / No.	

Supply requested

☐ Temporary water ☐ Temporary electricity

Estimated load (A / kW)		Est. water demand	
Location of tapping point		Purpose	
Period — From		To	

Declaration

The applicant is responsible for the safe use of the temporary supply, for metering where required, and for all consumption charges and deposits (as set out in the Building Addendum). The applicant shall make good and reinstate the tapping point on removal.

Signature of Applicant	Date

Approval (for Building Management use only)

Officer		Meter / deposit ref.	
Signature		Date	

Form RP/F5 — Undertaking — Tenancy Fitting-Out Works

To be completed by the Tenant.

To: [Landlord / Managing Agent — see Building Addendum]

Dear Sirs,

[Building Name] — Fitting-Out Works to Unit(s) # _____

We undertake to carry out fitting-out works to the premises known as # _____, [Building Name], in accordance with the plans dated _____ submitted to your Main/Site Office on _____.

We understand that, as we occupy an area of _____ sq ft, a security deposit of \$ _____ (as set out in the Building Addendum) is payable to you by us or our appointed Contractor on our behalf, as security for the due performance of our obligation to carry out the fitting-out works in accordance with the terms and conditions set out in the Brief for Tenants and in the Agreement to Grant Tenancy / Tenancy Agreement.

This deposit shall be paid at least three (3) days in advance before commencement and is refundable, interest-free, upon completion, subject to the works having been performed in accordance with the aforesaid terms and conditions, there being no damage to any part of the building or your fixtures and fittings (or, in the case of damage, subject to our having rectified it to your satisfaction), and all building materials and debris having been removed.

Name of Tenant / Company	Authorised signatory & company stamp
Name: Designation: Date:	

Form RP/F6 — Letter of Authorisation & Indemnity by Tenant

To be completed by the Tenant and Contractor.

To: [Landlord / Managing Agent — see Building Addendum]

Dear Sirs,

[Building Name] — Fitting-Out Works to Unit(s) # _____

We hereby authorise the Contractor, M/s _____ (name of Contractor) of _____ (address and contact numbers) ("the Contractor") to undertake fitting-out works at the above premises commencing from _____ to _____.

We confirm and undertake to procure that the Contractor will abide by all the terms and conditions set out in the Brief for Tenants for carrying out the fitting-out works.

In consideration of your permitting the Contractor to access the above premises for the sole purpose of carrying out fitting-out works, we agree to keep you fully indemnified in respect of all claims, losses, liabilities or damages made against, suffered or incurred by you as a result of any breach by the Contractor, its sub-contractors, employees or agents, of any terms and conditions in the Brief for Tenants, or as a result of any of the works undertaken by the Contractor.

For the Tenant	For the Contractor
Name:	Name:
Signature & Stamp:	Signature & Stamp:
Date:	Date:

Form RP/F7 — Application for Hot Works

Location of hot works	
Contractor	
Supervisor	

Type of hot work

☐ Welding ☐ Cutting ☐ Grinding ☐ Soldering / brazing ☐ Others: _____

Date		Time — From / To	
------	--	------------------	--

Precautions (tick and confirm before commencement)

Item	Yes	No	N/A
Suitable fire extinguisher(s) available at the worksite?	☐	☐	☐
Combustible materials removed or protected within 10 m of the hot work?	☐	☐	☐
Sprinklers / detectors operational, or Building Management notified of any impairment?	☐	☐	☐
Fire watch assigned during the work and for at least 60 minutes after?	☐	☐	☐
Work area screened to contain sparks and slag?	☐	☐	☐
Gas cylinders secured, upright and fitted with flashback arrestors?	☐	☐	☐
Equipment inspected and in good working condition?	☐	☐	☐
Adjacent occupants / units informed?	☐	☐	☐
Fire watch — Name			
Contact No.			

Declaration

I/We have taken the precautions above and will comply with all fire-safety requirements of Building Management and the SCDF.

Signature of Applicant	Date

Approval (for Building Management use only)

Officer		Permit valid — From / To	
Signature		Date	

Form RP/F8 — Application for Drainage / Isolation of Fire Sprinkler System

Location / Zone			
Contractor			
Person-in-charge			
Reason for draining / isolation			
Date		Time — From / To	

Fire-safety controls (tick and confirm)

Item	Yes	No	N/A
Fire Command Centre (FCC) / Building Management notified before isolation?	☐	☐	☐
Fire watch provided for the affected area while the system is impaired?	☐	☐	☐
Alternative fire-protection measures arranged (e.g. extinguishers, hose reels)?	☐	☐	☐
Work planned to keep the impairment to the shortest possible duration?	☐	☐	☐
System to be reinstated, refilled and tested on the same day?	☐	☐	☐
QP / SCDF informed if the impairment will exceed the permitted period?	☐	☐	☐

Reinstatement confirmation

System reinstated & tested on	(Date / Time)	By
Signature of Applicant	Date	

Approval (for Building Management use only)

Officer / Signature	Date

Form RP/F9 — Joint-Inspection Checklist for Refund of Fitting-Out Deposit

Tenant		Unit No.	
Fitting-out works completed on	(Date)		
Joint inspection requested on	(Date)		

For official use

Details	Checked by	Defects / Remarks
1. Installation according to approved application		
2. ACMV		
2.1 Air-balancing report		
2.2 Synchronisation to BMS (additional VAV/aircon with BTU meter) — if applicable		
2.3 Chilled-water pipe flushing and pressure-test report — if applicable		
3. Fire protection		
3.1 Sprinkler points		
3.2 Additional call point / hose reel / fire extinguisher / FM200		
3.3 Tenant sub-alarm panel (SAP) linkage to FCC — if applicable		
4. Sanitary & plumbing		
4.1 Water meter / utility account opening		
5. Electrical works		
5.1 Account-opening forms (Forms 1-1 to 1-3)		
5.2 Meter installation — if applicable		
5.3 Certification of compliance by LEW		
5.4 Statement of turn-on of electricity		
5.5 EMA licence — if supply exceeds 45 kVA		
6. No common-corridor defects		
7. No dumping of debris / all rubbish cleared		
8. Labelling for ACMV / electrical / pipes completed		
9. External glass panels — no protruding or unsightly fixtures		
10. POS system-interface forms — for retail units		
11. SFA Food Shop Licence — for F&B units		

Details	Checked by	Defects / Remarks
12. Approved plans with PE/QP endorsement (A&A architectural, structural, plumbing, ACMV, fire; LEW endorsement; FSSD submission; structural plans; as-built drawings)		
13. Copy of insurance policies per the Lease Agreement		
14. Comments		

For the Landlord / Managing Agent	For the Tenant (Signature & Company Stamp)
Name:	Name:
Signature & Stamp:	Signature & Stamp:
Date:	Date:

Form RP/F10 — Application for Overnight Parking of Bin

Tenant / Unit		Contractor	
Contact person / No.		Vehicle no.	
Vehicle height (m)		Location of parking	
Date(s)			
Time — From		To	

Terms & conditions

1. Applications shall be submitted at least three (3) working days in advance. Building Management reserves the right to reject applications submitted with less notice.
2. Parking of the bin is permitted only during the approved window (typically 2200—0400 hrs, up to six (6) hours), or as otherwise approved.
3. The applicant shall ensure the vehicle's height does not exceed the posted limit for the loading bay.
4. The applicant shall deploy their own traffic marshals to manage the bin vehicle's access from the carpark entrance to the parking location and its exit to the carpark exit. Security may deny entry or exit if no marshals are present.
5. The bin shall not obstruct traffic flow in the loading bay.
6. The bin shall be removed by the end of the approved window and the area returned to its original condition.

Declaration & approval

Signature of Applicant	Date
Building Management — Officer / Signature	Date

Form RP/F11 — Request for Electricity by Tenant (Forms 1-1 / 1-2 / 1-3)

A three-part form: Form 1-1 (Tenant's LEW), Form 1-2 (Landlord's LEW & Landlord's consent) and Form 1-3 (statement of turn-on). Building name, MSSL No. and account details are completed per the Building Addendum.

Form 1-1 — Part I: Tenant (completed by the Tenant's LEW)

To (Landlord's LEW)		Fax / Hp	
---------------------	--	----------	--

Electrical single-line diagram attached: ☐ Yes ☐ No

Consolidate to existing contract account: ☐ Yes ☐ No Existing account no.: _____

Electricity supply to

Blk / House No.		Unit No.	
Building Name		Street	
Postal Code		Tenant's company name	
Company registration no.		Target date	
Tenant's billing address			
Contact person / Designation		Tel (O) / Mobile	
Fax / Email		Total requested load (at _____ V)	

Meter owner: ☐ SP PowerGrid ☐ Landlord ☐ Tenant ☐ TPS ☐ Others: _____

Form 1-2 — Part II: Landlord's LEW / Part III: Landlord's consent

Part II (Landlord's LEW): confirms the building loading can cater for the requested load without exceeding the total approved load; raises no objection to connection to the rising/horizontal mains; states the building's Electrical Installation Licence No. and MSSL No.; confirms compatibility; and will inspect, turn on and issue the Statement of Turn-On on the turn-on date.

Electrical Installation Licence No.		MSSL No.	
New meter required / existing serial		Endorsed by (LEW) / Date	
LEW Licence No. / Tel		Fax / Address	

Part III (Landlord's consent): the Landlord consents to the Tenant tapping supply of the indicated capacity from the rising/horizontal mains and, where applicable, to purchasing electricity en bloc on the Tenant's behalf per the Lease. A new revenue meter may be required (refer to Form 2A / RP/F12).

To Tenant (company name)	Authorised person — Signature / Stamp / Date

Form 1-3 — Statement of turn-on

Building / Unit		MSSL No.	
Meter serial no.		Initial meter reading	
Turn-on date		LEW endorsement / Date	

Form RP/F12 — Tenant's Application for New Meter Installation / AMR (Form 2A)

To be completed by the Tenant's LEW and submitted at least five (5) working days before commencement. Documents required: Form CS3; photo of installed external CT (if a 3-phase CT meter is required); and single-line drawing.

To (Landlord's LEW)		Fax / Hp	
Tenant's name			
Tenant's address (Blk/House No., Unit, Building, Street, Postal Code)			

Meter type recommended

- ☐ Single phase — _____ A
- ☐ 3-phase whole current — _____ A
- ☐ 3-phase CT — CT ratio _____ / A

MSSL No.		Contract account no.	
Requested turn-on date		Tenant's LEW / Licence No.	

Endorsement

Tenant's LEW — Signature / Date	Landlord's LEW — Confirmation / Date

Schedule of Deposits Payable for Electricity Supply

Actual deposit amounts are set out in the Building Addendum. The structure below indicates the basis on which deposits are computed.

If kVA is unknown

The deposit is computed on lettable area — for example, a fixed amount for every 500 sq ft (or part thereof) of lettable space, as specified in the Building Addendum.

If kVA is known

No.	Electrical loading (kVA)	Deposit (\$\$)
1	Up to 15	[per Building Addendum]
2	16 — 45	[per Building Addendum]
3	46 — 75	[per Building Addendum]
4	76 — 140	[per Building Addendum]
5	141 — 180	[per Building Addendum]
6	181 — 230	[per Building Addendum]
7	231 — 280	[per Building Addendum]
8	281 — 460	[per Building Addendum]
9	461 — 560	[per Building Addendum]
10	561 — 1000	[per Building Addendum]
11	1001 — 2000	[per Building Addendum]

The Tenant shall maintain the electricity deposit based on the capacity of the power supply to the unit; the deposit shall not be less than two (2) times the average monthly charges, or the scheduled sum, whichever is higher. It is payable to the Landlord / Managing Agent named in the Building Addendum.

Checklist — Required Documents for PTW Approval

The following documents are mandatory before Permit-to-Work approval. Missing items at submission may delay approval.

- ☐ Form RP/F1 — Permit to Work (PTW)
- ☐ Form RP/F2 — Risk Assessment
- ☐ Form RP/F3 — Contractor's Registration
- ☐ Workers' namelist (last 4 digits of ID and work-permit expiry)
- ☐ Building EHS Rules for Vendors (signed acknowledgement)
- ☐ Form RP/F5 — Undertaking (Tenancy Fitting-Out Works)
- ☐ Form RP/F6 — Letter of Authorisation & Indemnity
- ☐ Renovation / fitting-out deposit
- ☐ Pre-condition survey report
- ☐ Insurance cover note
- ☐ Project schedule
- ☐ Endorsed project drawings (for fitting-out):
 - o Layout plan, including reflected ceiling & lighting layout
 - o Pantry layout plan, if applicable
 - o Sanitary & plumbing drawings
 - o Air-conditioning & mechanical ventilation plan
 - o Fire-protection system plan
 - o Electrical / ELV systems plan
 - o Single-line diagram
 - o Shopfront design plan; perspective at main entrance & interiors (retail)
 - o Signage plan, if any
- ☐ Confirmation of hoarding erection & sticker-installation schedule (retail)
- ☐ Fitting-out / Reinstatement Inspection Form (retail)

Fitting-out / Reinstatement Inspection Form (Retail)

Tenant / Unit		Inspection date	
Inspector			

Type: ☐ Fitting-out ☐ Reinstatement

Item	Yes	No	N/A
Shopfront / storefront condition and finish	☐	☐	☐
Signage installed or removed per the approved design	☐	☐	☐
Floor, wall and ceiling finishes	☐	☐	☐
ACMV returned to base-building condition (on reinstatement)	☐	☐	☐
Fire protection — sprinklers / detectors reinstated and operational	☐	☐	☐
Electrical — isolations, distribution board and capped services	☐	☐	☐
Sanitary & plumbing — capped or removed and made good	☐	☐	☐
F&B kitchen — exhaust, grease and gas services removed (if applicable)	☐	☐	☐
Hoarding removed and make-good completed	☐	☐	☐
Common areas clean and undamaged	☐	☐	☐
Debris cleared from unit and common areas	☐	☐	☐
Penetrations and openings sealed / made good	☐	☐	☐

For the Landlord / Managing Agent	For the Tenant (Signature & Company Stamp)
Name:	Name:
Signature & Stamp:	Signature & Stamp:
Date:	Date:

Tenant Point-of-Sale (POS) System Interface — Retail and F&B

Retail and F&B tenants are required to sign the Point-of-Sales (POS) option form and ensure the necessary hardware is provided during fitting out of the Premises.

- The Tenant shall ensure that there is a dedicated network card in the POS terminal or server, and that network cabling is laid to the cashier counter.
- The Tenant shall ensure that a Cat5e LAN data cable is laid from the main POS point in the unit (adjacent to the Power DB or Isolator) to the Tenant's POS cashier counter or POS server.
- The LAN Cat5e cable shall be terminated correctly in 568-B wiring format.
- Any additional cost from the Tenant's POS vendor for integration or cabling work is the Tenant's sole responsibility.
- The Tenant shall employ their own renovation or cabling contractor to lay the cable from the main POS point to the POS cashier counter or POS server.
- Confirm POS system interface requirements with Building Management before fit-out commencement.

APPENDIX R — Reserved

Reserved for future use.

APPENDIX S — Reserved

Reserved for future use.

APPENDIX T — Smart Building Integration Guide

Companion to Parts 4.8, 7.9 and 7.10. This guide sets the technical rules for connecting tenant systems to building platforms.

T.1 Approved Protocols and Interfaces

System / Data	Standard	Notes
HVAC & plant controls	BACnet/IP (ASHRAE 135)	BTL-listed devices preferred; BBMD by approval only
Meters (electricity/water)	Modbus TCP/RTU, M-Bus or pulse	AMR integration per Appendix I
Lighting controls	BACnet/IP, DALI-2 via gateway	Zone status and energy points exposed to BMS
Data exchange (IT layer)	RESTful API over HTTPS (TLS 1.2+)	OpenAPI 3.0 documentation required
IEQ sensors	BACnet/IP or approved IoT gateway	Temp, RH, CO2 minimum; PM2.5/TVOC for wellness projects
Telemetry (IoT)	MQTT over TLS, client certificates	Per Appendix AA.5; unencrypted MQTT prohibited

T.2 Point Naming and Data Requirements

- Points follow the naming convention (BUILDING-LEVEL-TENANT-SYSTEM-POINT) and carry Brick Schema classes as the mandatory portfolio ontology, with Project Haystack tag mapping permitted — per Appendix AA.1. Building Addenda may extend the dictionary but not vary it, ensuring interoperability across BMS, BIM, COBie, AMR, IoT and the portfolio digital twin.
- Trend intervals: energy 15 minutes; IEQ 5 minutes; alarms event-driven with timestamp and priority.
- Occupancy analytics data is anonymised and aggregated; no personal data is transmitted to the Landlord.

T.3 Cyber-Security Baseline

- All OT devices on segregated VLANs behind the tenant firewall; no inbound internet exposure; remote access via Landlord-approved secure gateway only (Part 7.9).
- Default credentials changed; firmware support confirmed for the device lifetime; patching plan lodged at handover.
- A completed Smart Systems Integration Checklist (issued via the Tenant Portal) is a commissioning deliverable under Part 9.
- Data ownership, retention schedules, access rights, cloud rules and the cybersecurity approval workflow are governed by Section 5.6 and Appendix AA.

T.4 BMS Points List Template

- Every integrated system is submitted on the standard points list template (Tenant Portal): point name, Brick class, Haystack tags, units, range, trend interval, alarm limits, FDD relevance flag and shed/shift capability flag (7.12).
- The as-commissioned points list is verified at Part 9 witnessing and lodged in the digital handover (Appendix U); it is the reference for AA.6 validation.

APPENDIX U — Digital Handover Standards (BIM/COBie)

Companion to Parts 10.4 and 10.6. Defines the format and quality rules for the digital handover package. Deposit release (Part 10.5) is conditional on acceptance.

U.1 Deliverables and Formats

Deliverable	Format	Quality Rule
As-built BIM model	IFC 2x3 or IFC4, LOD 300	Georeferenced to building grid; clash-free vs base build
COBie asset register	COBie 2.4 (xlsx) or IFC-embedded	All maintainable assets; no empty mandatory fields
Asset tags & QR labels	naming convention	One label per maintainable asset, linked to register
O&M manuals & warranties	Searchable PDF	Folder structure per U.2; no scanned-image-only files
T&C and statutory records	Searchable PDF	Cross-referenced to the Green Completion Pack (Part 9.2)
Asset hierarchy & warranty matrix	COBie 2.4 fields	System > equipment > component; warranty start/expiry per asset
Maintenance schedules & spare parts	COBie Job/Resource or xlsx	PPM frequencies and critical spares per maintainable asset
Sensor calibration certificates	Searchable PDF	IEQ and metering sensors; feeds AA.6 validation

U.2 Portal Folder Structure

- 01 Approvals & Statutory · 02 As-Built Drawings & BIM · 03 COBie & Asset Register · 04 O&M and Warranties · 05 T&C Records · 06 Photographs · 07 Smart Systems Documentation (Appendix T).

U.3 Acceptance

- Building Management performs a completeness and quality check within ten (10) working days of upload and issues an acceptance or rejection note with reasons.
- Sampling: at least 10% of QR-tagged assets are physically verified against the COBie register during the Operational Readiness review (Part 10.7).

APPENDIX V — Tenant ESG Reporting Guide

Companion to Parts 4, 5, 11.6 and 11.9. Consolidates what tenants report, when, and how it is used — including scoring for the Green Tenant Recognition Programme.

V.1 Reporting Calendar

Item	Frequency	Channel
Energy & water data	Automatic (AMR) — monthly review	Tenant Portal dashboard (Part 11.10)
Waste & diversion data	Quarterly	Tenant Portal — waste module
Annual sustainability report (Form G2 holder)	Annually, within 60 days of FY end	Tenant Portal (Part 11.6)
GMI certificate / renewals	On issue and renewal	Upload to Tenant Portal
Wellness initiatives summary	Annually	With the annual sustainability report

V.2 Recognition Scoring

- Each metric in Part 11.9 is scored on a common scale, normalised to 100. Platinum ≥ 90, Gold ≥ 80, Silver ≥ 65. Most Improved recognises the largest verified year-on-year gain. The annual Award Categories are judged separately under the methodology and scorecard in Appendix AD.
- Evidence is drawn from metered data first; self-reported items require supporting documents.
- Results are confirmed at the Annual Green Lease Performance Review (Part 5.5) and awards issued within 30 days.

V.3 Data Use and Privacy

- Tenant data is used per the bilateral data sharing protocol (Part 5.4): portfolio ESG reporting, benchmarking and regulatory disclosure, in aggregated or anonymised form unless otherwise agreed.

V.4 Investor Disclosure Crosswalk

Tenant data collected under this Manual maps directly to investor-grade disclosure, converting operational sustainability data into reporting outputs:

Manual data source	ISSB / IFRS S2	GRESB	SBTi Buildings	SGX / CDP
Metered energy (App. I, 11.10)	Scope 2 metrics & targets	Energy (EN1)	In-use energy intensity	SGX core metric; CDP C6
Scope 1 refrigerants (4.3.1)	Scope 1 metrics	GHG (GH1)	Included in target boundary	SGX core; CDP C7
Embodied carbon (4.10, App. G)	Scope 3 cat. 2 capital goods	Embodied carbon module	Upfront carbon reporting	CDP C6.5
Water (4.6, 11.10)	Water metrics where material	Water (WT1)	—	SGX core; CDP W-series
Waste diversion (11.4)	Waste where material	Waste (WS1)	—	SGX core
IEQ & wellness (4.7, 11.10)	Occupant health disclosures	Health & wellbeing	—	Narrative support

Manual data source	ISSB / IFRS S2	GRESB	SBTi Buildings	SGX / CDP
Data quality statement (AA.6)	Data assurance basis	Data coverage scoring	Target data integrity	Assurance narrative

- Measurable indicators and reporting cadence follow V.1; landlord-level consolidation is performed by the Asset Management Division for portfolio ESG reporting and green-financing evidence.
- Investor and funding readiness — IFRS S1 alignment, avoided-carbon methodology, tenant-contribution tracking, audit trails and sustainability-linked finance documentation — is governed by Appendix AE.

APPENDIX W — Design Review Panel Guide

Companion to Part 3.7. Terms of reference for the Design Review Panel.

W.1 Composition

- Chair: Asset Manager for the Building. Members: design lead, sustainability team representative, Building Manager. Co-opted: external design advisor for flagship projects; FSSD/QP advisors as required.

W.2 Referral Thresholds

- Automatic: $\geq 1,000$ sqm; headquarters offices; flagship retail; premium frontage; wellness-certified projects.
- Discretionary: any project the Building Manager assesses as having material impact on shared environments or building brand.

W.3 Sitings and Submissions

Stage	Tenant Submits	Panel Output
Concept review	Concept boards, plans, frontage elevations, materials palette, sustainability & wellness strategy	Concept endorsement or steer, within 10 working days
Detailed design review	Developed design set per Part 6, scorecard self-assessment (Part 3.8)	Consolidated report + scorecard rating, within 10 working days

W.4 Standing Rules

- DRP comments are consolidated into one report per sitting; conflicting comments are resolved by the chair before issue.
- The DRP endorses design quality; statutory and technical approvals under Parts 6–7 remain separate and unaffected.

APPENDIX X — Mission Critical Facilities Standards

Companion to Part 7.11. Minimum design criteria for tenant mission critical spaces.

X.1 Minimum Criteria

Element	Minimum Standard
Cooling	N+1 dedicated cooling; temperature/humidity per ASHRAE TC 9.9 recommended envelope
Power	Dual-path supply to critical racks where available; UPS autonomy sized to generator start or safe shutdown
Harmonics	THDi at PCC per IEEE 519 / SS 555; active filtration where exceeded
Heat rejection	Approved location; acoustic compliance per Appendix B.3; PE-endorsed structural verification
Leak detection	Zoned leak detection under all cooling plant and pipework, alarmed to BMS
Fire protection	Clean agent or pre-action per Part 7.4; VESDA recommended for high-density suites
Floor loading	PE verification at Stage 0; spreader plates/strengthening approved by Landlord's QP
Monitoring	Critical alarms repeated to BMS per Appendix T; 24/7 escalation contacts lodged with Building Management

X.2 Testing and Commissioning

- Integrated systems testing (IST) demonstrating failover of cooling and power is a Part 9 deliverable for mission critical spaces.
- Load-bank testing of UPS/generator connections is conducted out of hours under PTW (Part 8.2).
- ESG reporting — mission-critical energy and after-hours load are separately sub-metered (Appendix I) and reported through the dashboard (11.10) and Appendix V, so critical-load exposure is visible in portfolio ESG and asset planning (14.4).

APPENDIX Y — Post Occupancy Evaluation Toolkit

Companion to Part 11.8. A standard toolkit so POE results are comparable across the portfolio.

Y.1 Timing and Scope

- POE is conducted in three waves — 30 days, 6 months and 12 months after occupation — for fit-outs ≥ 1,000 sqm, and offered to all tenants. Wave 1 (30 days) focuses on move-in experience and defect management; Waves 2–3 add comfort, performance and utilisation.
- Scope: occupant satisfaction, IEQ performance vs design, energy/water vs baseline (Part 10.7), defects experience and space utilisation.

Y.2 Toolkit Components

Component	Method
Occupant survey	Standard questionnaire (Appendix Z), ≥ 30% response target
IEQ spot measurement	Temperature, RH, CO2, lux, noise at representative points vs Part 4.7 criteria
Energy & water review	12-month metered data vs Operational Readiness baseline and design estimate
Utilisation review	Occupancy analytics data where installed (Part 7.10)
Move-in & defects review (Wave 1)	Move-in experience, defect management and Operational Readiness follow-through (10.7) at 30 days
Service & digital experience	Digital portal usability, sustainability support and Building Management responsiveness (Appendix Z items)
Close-out workshop	Tenant + Building Management; actions logged and tracked

Y.3 Use of Results

- Findings feed the Part 14 KPI set, the Green Tenant Recognition Programme (Part 11.9) and future revisions of this Manual.

APPENDIX Z — Tenant Satisfaction Survey

Standard survey issued (a) at fit-out completion and (b) during Post Occupancy Evaluation (Appendix Y). Responses are scored on a 5-point scale (5 = Very Satisfied) and feed the Part 14 KPIs.

Z.1 Fit-Out Journey Survey

#	Question	Reference
1	Clarity of this Manual and the Building Addendum	Parts 1–6
2	Usefulness of the Stage 0 Feasibility Review (if used)	Part 2.3
3	Quality and timeliness of design review comments	Parts 3.7, 6
4	PTW and site administration during construction	Part 8
5	Handover, digital handover and deposit release experience	Part 10
6	Support from Building Management overall	—

Z.2 Occupancy Survey (POE)

#	Question	Reference
1	Thermal comfort in your workspace	Part 4.7.5
2	Air quality and freshness	Part 4.7.3
3	Lighting quality	Parts 3.2.3, 4.2.1
4	Acoustic comfort	Part 4.7.4
5	Usefulness of the performance dashboard	Part 11.10
6	Overall satisfaction with the premises	—

Free-text feedback is invited on each item. Survey administration is via the Tenant Portal; results are shared with the tenant's nominated representative.

Z.3 Response Protocol — "You Said, We Did"

- Every survey wave receives a written response within sixty (60) days: what was raised, what will change, what will not and why.
- Responses are published to the tenancy via the Tenant Portal and tabled at the next Green Lease review (5.5); themes and actions feed Part 14 reporting and Manual revisions (14.3).
- **NPS** is computed from the overall-satisfaction items in Z.1/Z.2 and reported against the Part 14 target.

APPENDIX AA — DATA GOVERNANCE & CYBERSECURITY STANDARD

Companion to Section 5.6 and Parts 7.9–7.12. This Appendix sets the portfolio-wide technical standard for data schemas, retention, access, OT/IT boundaries, cloud integration, cybersecurity approval and dashboard data validation. It applies identically across all -managed assets; Building Addenda may add to, but not relax, these requirements.

AA.1 Portfolio Data Schema

All AMR meter data exchanged with platforms uses this minimum schema, applied identically across the portfolio so analytics aggregate cleanly:

Field	Format	Rule
meter_id	String	convention: BUILDING-LEVEL-TENANT-SERVICE-SEQ
timestamp	ISO 8601, UTC+8	15-minute interval ends; gaps > 24 h must carry a flag
reading_kwh reading_m3	/ Decimal (3 dp)	Cumulative register value, not interval delta
quality_flag	Enum	OK / ESTIMATED / MISSING / SUSPECT
source	Enum	AMR / MANUAL / RECONCILED

Semantic ontology: all points, equipment and spaces carry Brick Schema classes as the portfolio ontology, with Project Haystack marker-tag mapping permitted where platforms require it; RealEstateCore alignment is maintained at platform level. Building Addenda may extend the dictionary but may not vary class names — preventing building-by-building fragmentation of the portfolio **digital twin**.

AA.2 Data Retention Schedule

Data class	Retention	Then
Metered energy / water (15-min)	Lease term + 7 years	Anonymise for portfolio benchmarking
IEQ sensor data	Lease term + 3 years	Anonymise or delete
Occupancy analytics (aggregated)	Lease term + 3 years	Anonymise or delete
BMS alarms & trend logs (tenant plant)	7 years	Delete
COBie / asset & maintenance records	Life of installation + 7 years	Archive with Building records
Waste manifests & diversion records	7 years	Delete
Survey responses (attributable)	3 years	Aggregate, then delete source
Access & cyber event logs	2 years minimum	Delete unless under investigation

AA.3 Access Rights Matrix

Data / System	Tenant	Tenant Vendor	Bldg Mgmt	Asset Mgmt	3rd-party analytics
Tenancy meter data	Read	Read*	Read	Read (agg.)	Read (anon., approved)

Data / System	Tenant	Tenant Vendor	Bldg Mgmt	Asset Mgmt	3rd-party analytics
Tenancy IEQ data	Read	Read*	Read	Read (agg.)	Read (anon., approved)
Occupancy analytics	Read (full)	No	Read (agg.)	Read (agg.)	No
Tenant BMS points	Read/Write	Read/Write*	Read; life-safety write	No	No
Benchmark / dashboard views	Read (own)	No	Read	Read	No
COBie / asset register	Read/Write (own)	Read/Write*	Read	Read	No

- * If authorised in writing by the Tenant. All access is individually credentialed with multi-factor authentication for remote access; shared accounts are prohibited; access is reviewed quarterly and revoked within one (1) working day of personnel change.

AA.4 OT / IT Boundary and Network Segregation

- Tenant OT (BMS controllers, meters, sensors, gateways) resides on dedicated OT VLANs, segregated from tenant corporate IT by a tenant-controlled firewall with deny-by-default rules.
- No OT device may have a direct inbound internet connection; outbound cloud connections only per AA.5. Remote access is via the Landlord-approved secure gateway (7.9), session-logged, time-bounded and sponsored by a named Tenant representative.
- The OT/IT boundary and firewall rule intent are documented in the Smart Systems Integration Checklist (Appendix T) and lodged at handover; material changes require re-submission.

AA.5 Cloud Integration Rules

- Cloud-connected tenant systems require AA.6 approval before connection to building-interfacing networks. Transport security: TLS 1.2+; MQTT is acceptable only as MQTT over TLS with client-certificate authentication; unencrypted MQTT, FTP and Telnet are prohibited.
- Data residency: tenancy data replicated to cloud services is hosted in Singapore or jurisdictions approved by , declared in the approval submission. API access to platforms uses per-tenant scoped credentials per Appendix T; credentials are never embedded in firmware or shared across tenancies.

AA.6 Cybersecurity Approval and Dashboard Data Validation

- Approval workflow: (1) Tenant submits the Smart Systems Integration Checklist with network diagram, device schedule, firmware support statements, AA.5 cloud declarations and AA.4 boundary documentation; (2) reviews within ten (10) working days and approves, conditions or rejects with reasons — connection before approval breaches 7.9 and may result in disconnection; (3) at commissioning (Part 9), points are verified against the T.4 template, default credentials confirmed changed and calibration certificates lodged (Appendix U); (4) in operation, patch within 90 days (critical: 14 days) and notify of cyber incidents affecting building-interfacing systems within 24 hours.
- Data validation: automated checks flag gaps, flatlines, negative deltas and out-of-range values using AA.1 quality flags; flagged data is excluded from benchmarking until resolved. Meters are reconciled against main incomers quarterly; discrepancies above 2% trigger investigation and recalibration evidenced per Appendix U.
- Queries and assurance: either party may raise a data-accuracy query via the Tenant Portal (acknowledged in 2 working days, resolved or escalated in 10); an annual data-quality statement (completeness %, estimated-data %, open queries) is tabled at the Annual Green Lease Performance Review (5.5) and supports ISSB / GRESB data-assurance expectations (Appendix V).

Interpretation and Legal Notes

- Any indemnity given by the Tenant under this Manual is in addition to and does not prejudice any indemnity under the Lease Agreement.
- All sums in this Manual are exclusive of prevailing GST. The Tenant shall pay GST in addition to all specified sums.
- Landlord consent or approval under this Manual must be obtained in writing before the relevant action is taken.
- A person not a party to this Manual has no right under the Contracts (Rights of Third Parties) Act (Cap. 53B) to enforce any term of this Manual.
- In the event of conflict between this Manual and the Lease Agreement, the Lease Agreement prevails.

Group — Tenant Fitting Out Manual · Version 1.0 · July 2026

Asset Management Division · Singapore

assetmgt@propertiesltd.com.sg · sustainability@.com.sg

© 2026 City Developments Limited. All rights reserved.

